

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

A

B

C

D





E

F

G

H

1

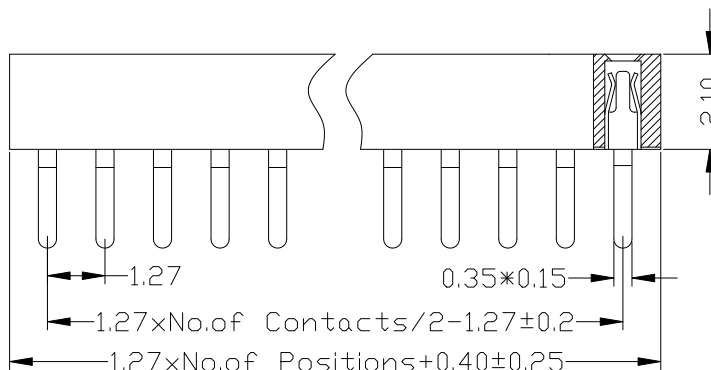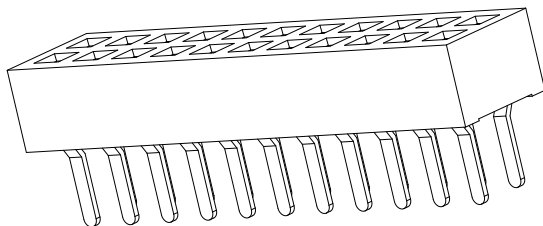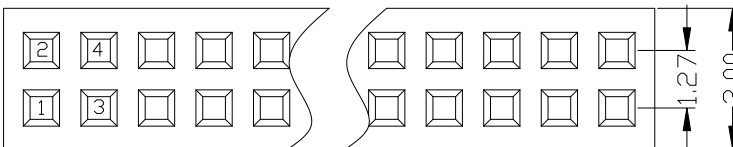

F321-12 XX XX X SU^AX

PACKING
A:PE Bag
B:Tape & R

C:PA9T
D:LCP

C: Tube
D: Tube+CAP
E: Tray

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F321-12XXXXXSUX1	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	1. 27mm 双排母 塑高2.1 180度 U型	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		DIM	TOL	PROJ.		APPROVE		Customer No.		

上海高霖电子有限公司

卢小强

PART NO. _____

F321-12XXXXXSUX1

TITLE:

1.27mm 双排母 塑高2.1 180度 U型

Customer No.

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

F334-12 XX XX X SU X

NO.OF PINS
PER ROW
2-50P





Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR
MATERIAL:
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

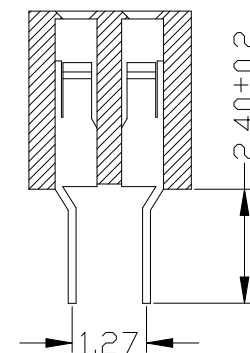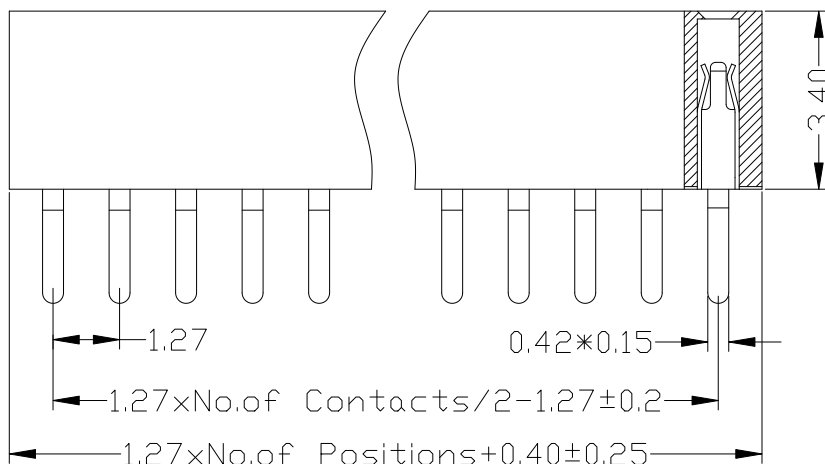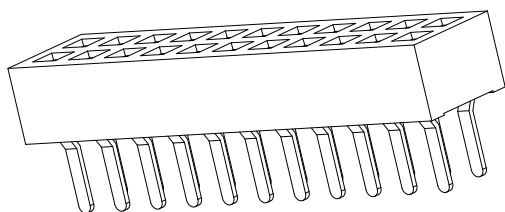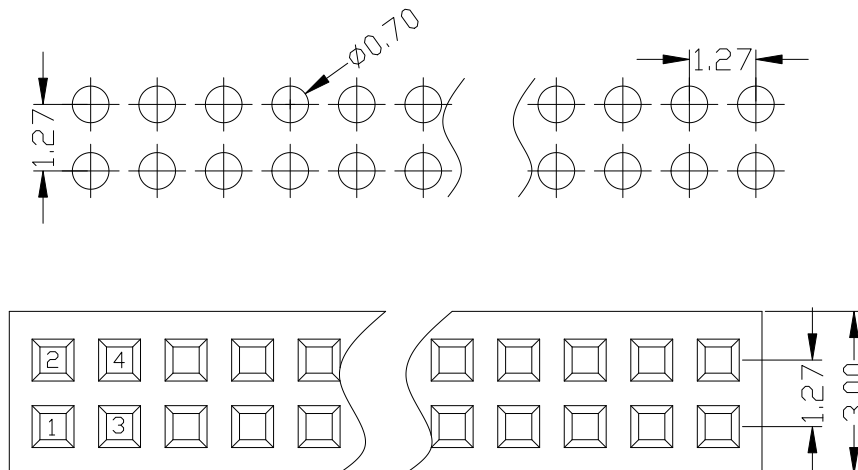

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强			
				X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.			
				Angle	±3°	PROJ.	APPROVE		TITLE:			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL		Customer No.			

上海高霖电子有限公司

卢小强

PART NO.

F334-12XXXXXSUX1

TITLE:

1.27mm 双排母 塑高3.4 180度 U型

Customer No.

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.





耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

封口端子图

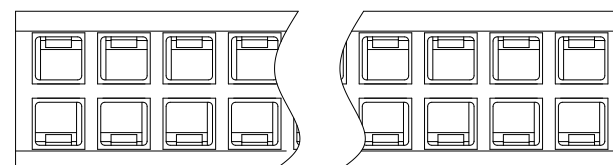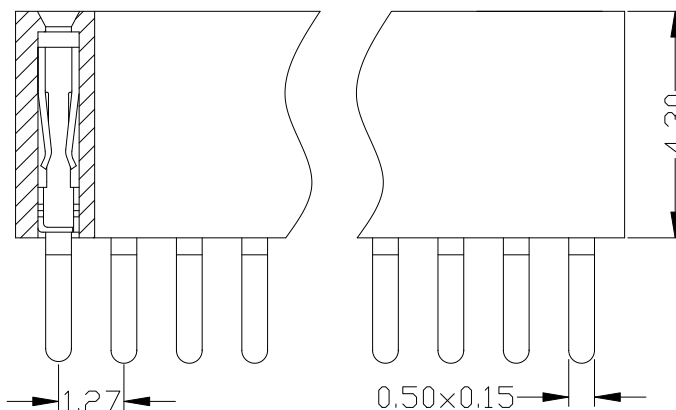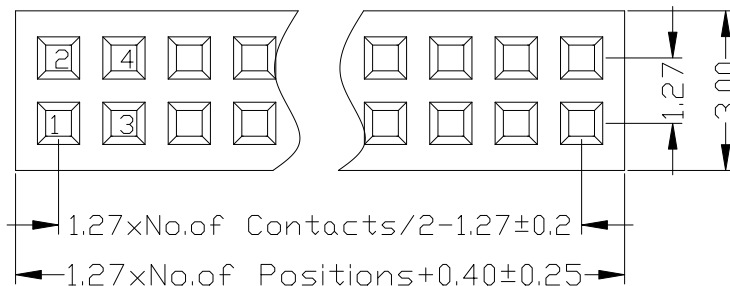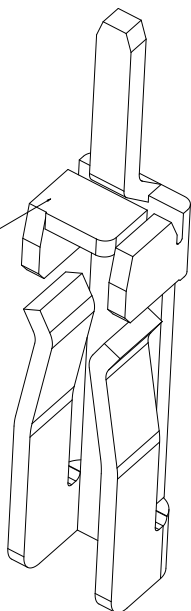

Ordering Information

F343-12 XX XX X SF AX

NO.OF PINS
PER ROW
2~50P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Semi-gold

B0=0.8u"

B1=1u"

B2=1.5u"

B3=2u"

B4=3u"

B5=5u"

B6=10u"

B7=15u"

B8=20u"

B9=30u"

MATERIAL:

A: PA6T

C: PA9T

D: LCP



A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

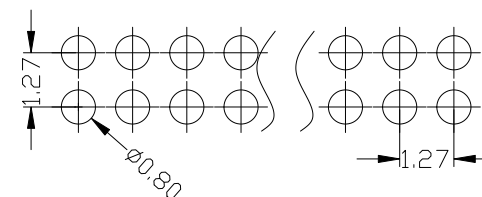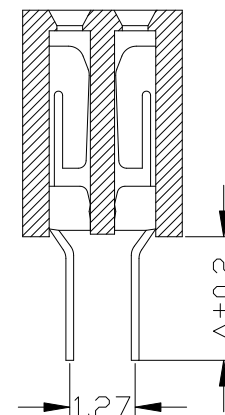

DIM"A" 2.40 2.00

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强			
				X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.			
				Angle	±3°	PROJ.	APPROVE		TITLE:			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL		Customer No.			

上海高霖电子有限公司

卢小强

PART NO.

F343-12XXXXXSFX1

TITLE:

1.27mm 双排母 塑高4.3 180度 封口

Customer No.

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

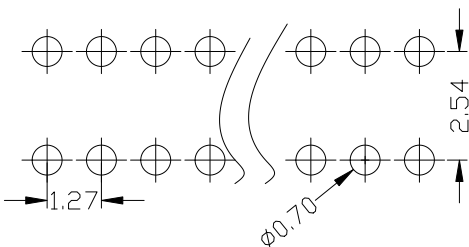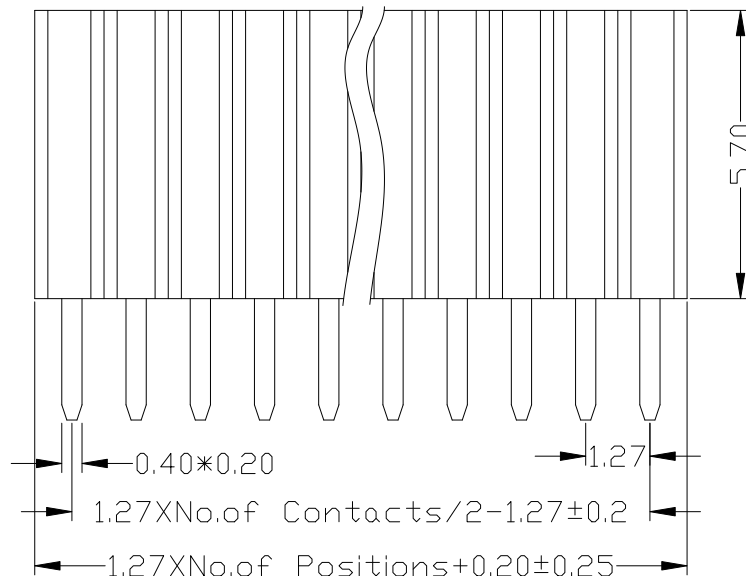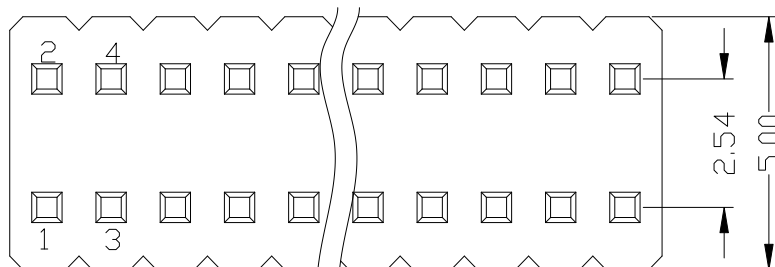

Ordering Information

F457-12 XX XX X SU AX

NO.OF PINS
PER ROW
2~50P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR

MATERIAL:

A: PBT

B: PA6T

C: PA9T

D: LCP

PACKING


A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

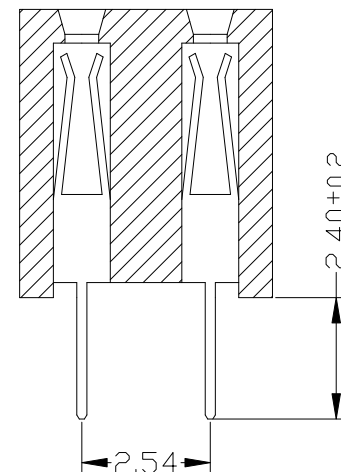

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F457-12XXXXXSUX1	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1. 27mm*2. 54 双排母 塑高5. 7 180度 U型	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

F457-12XXXXXSUX1

1. 27mm*2.54 双排母 塑高5.7 180度 U型