

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C



Ordering Information

P310-11 XX XX X S XXX A X

HEIGHT OF HOUSING 10:1.0mm	NO.OF PINS PER ROW 1~50P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: OF B:PA6T C:PA9T D:LCP	LENGTH OF TERMINAL	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

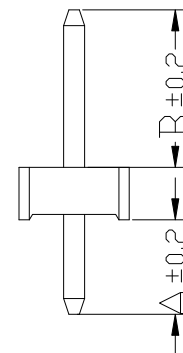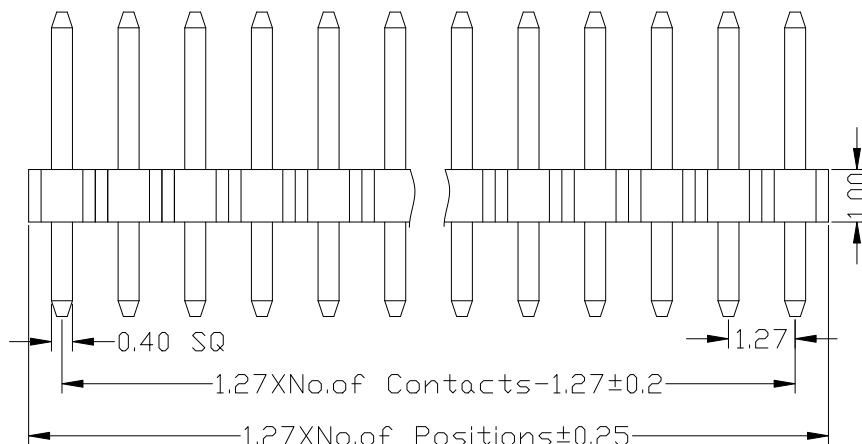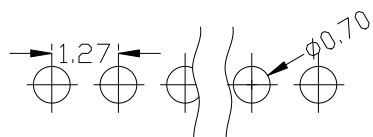

Dimension antitheses list

ITEM	A	B		
Standard	1.8	1.8	3.0	4.0
Alternate				

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

Fit

MM

SIZE

A4

DESIGN

卢小强

PART NO.

P310-11XXXXXSXXXX1

SHEET

1/1

CHECK

TITLE:

1.27mm 排针 单排 180度

PROJ.

APPROVE

APPROVE



Customer No.

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------

Specifications


备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperture Range: -40°C to +105°C

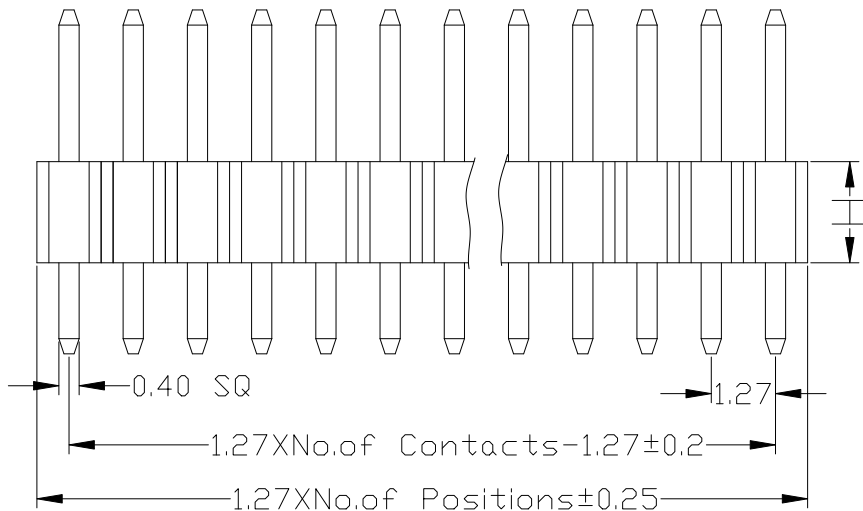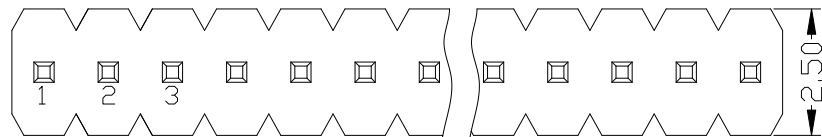

Ordering Information

P3XX-11 XX XX X S XXXA X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH TERMINAL	PACKING
16:1.6mm	1~50P	Full Of Gold	B:PA6T		A:PE Bag
20:2.0mm		Semi-gold	C:PA6T		B:Tape & Reel
25:2.54mm			D:LCP		C:Tube
					D:Tube+CAP
					E:Tray

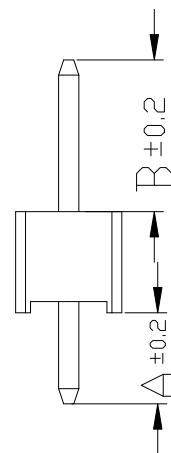

Dimension antitheses list							
ITEM	A	B		H			
Standard	1.8	1.8	3.0	4.0	1.6	2.0	2.5
Alternate							

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强			
				X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.			
				Angle	±3°	PROJ.		APPROVE	TITLE:			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL		Customer No.			

A

B

C




D

F

F

G

H

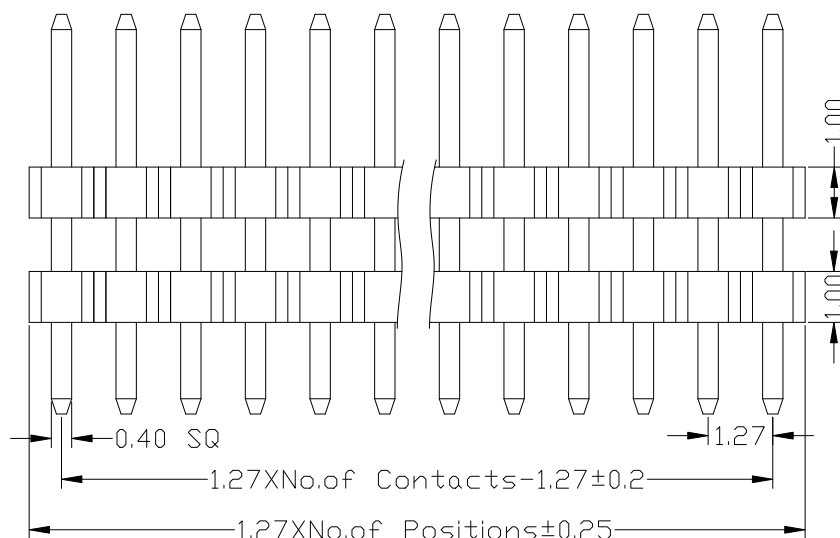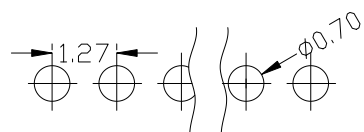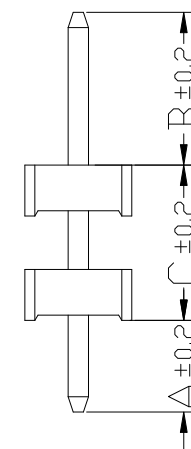

Dimension antitheses list					
ITEM	A		B		C
Standard	1.8	1.8	3.0	4.0	
Alternate					

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P310-21XXXXXSXXXX1		
					X.XXX	±0.10								
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 单排 双塑 180度		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.			

P310-21 XX XX X S XXXX_A X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Full Of Gold	Plating Semi-gold	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
10:1.0mm	1~50P	A0=0.8u"	B0=0.8u"	B:PA6T		A:PE Bag
		A1=1u"	B1=1u"	C:PA9T		B:Tape & Reel
		A2=1.5u"	B2=1.5u"	D:LCP		C:Tube
		A3=2u"	B3=2u"			D:Tube+CAP
		A4=3u"	B4=3u"			E:Tray
		A5=5u"	B5=5u"			
		A6=10u"	B6=10u"			
		A7=15u"	B7=15u"			
		A8=20u"	B8=20u"			
		A9=30u"	B9=30u"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

上海高霖电子有限公司

Specifications

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

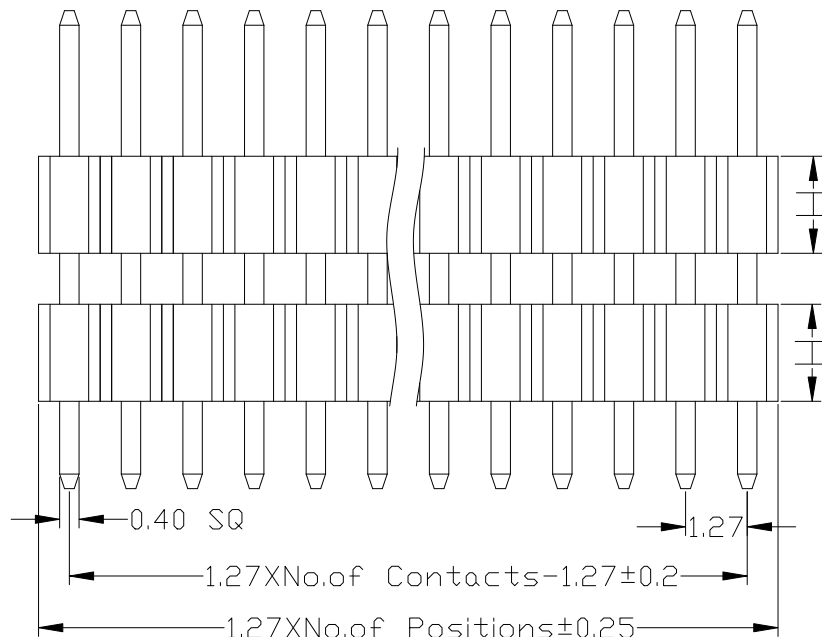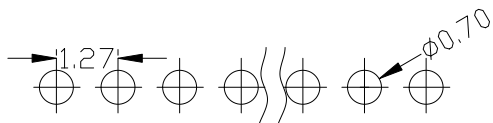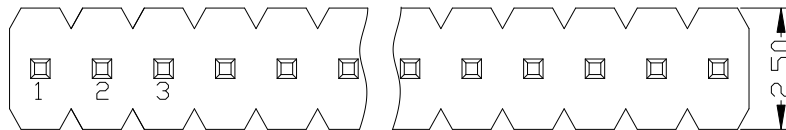

Ordering Information

P3XX-21 XX XX X S XXXX

HEIGHT OF NO.OF PINS	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
HOUSING	Full Of Gold	B: PA6T		A: PE Bag
16: 1.6mm	A0=0.8u"	C: PA9T		B: Tape & Reel
20: 2.0mm	A1=1u"	D: LCP		C: Tube
25: 2.54mm	A2=1.5u"			D: Tube+CAP
	A3=2u"			E: Tray
	A4=3u"			
	A5=5u"			
	A6=10u"			
	A7=15u"			
	A8=20u"			
	A9=30u"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

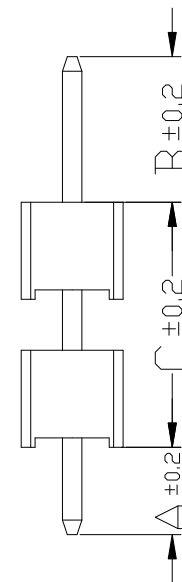

Dimension antitheses list

ITEM	A	B	H	C
Standard	1.8	1.8 3.0 4.0	1.6 2.0 2.5	
Alternate				

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SIZE

A4

DESIGN

卢小强

PART NO.

P3XX-21XXXXXSXXX1

SHEET

1/1

CHECK

TITLE:

1.27mm 排针 单排 双塑 180度

PROJ.

APPROVE

APPROVE

Customer No.

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------