

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

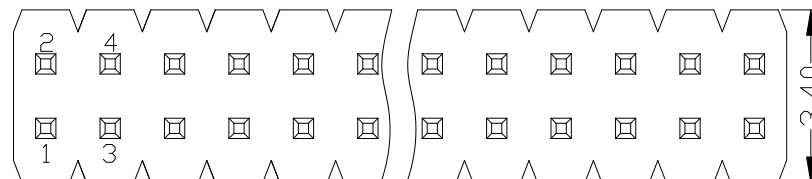

Ordering Information

P3XX-12 XX XX X S XXXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
08:0.8mm 10:1.0mm 15:1.5mm	2~50P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B:PA6T C:PA6T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

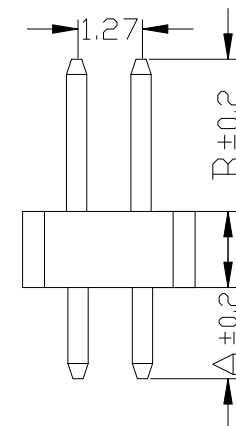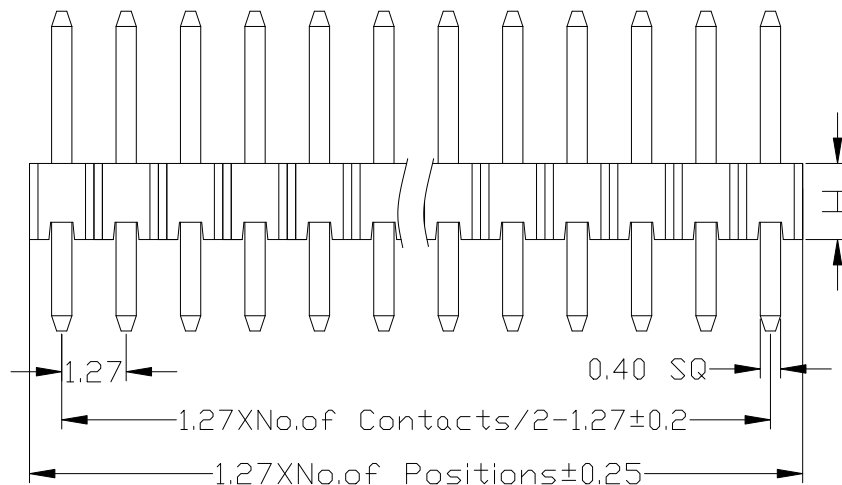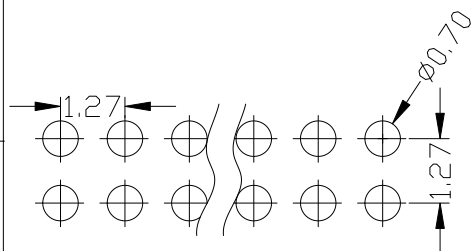

Dimension antitheses list

ITEM	A	B	H
Standard	1.8	1.8 3.0 4.0	0.8 1.0 1.5
Alternate			

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P3XX-12XXXXXSXXXX1

1.27mm 排针 双排 180度

REV DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1 2 3 4 5 6 7 8 9 10

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperture Range: -40°C to+105°C

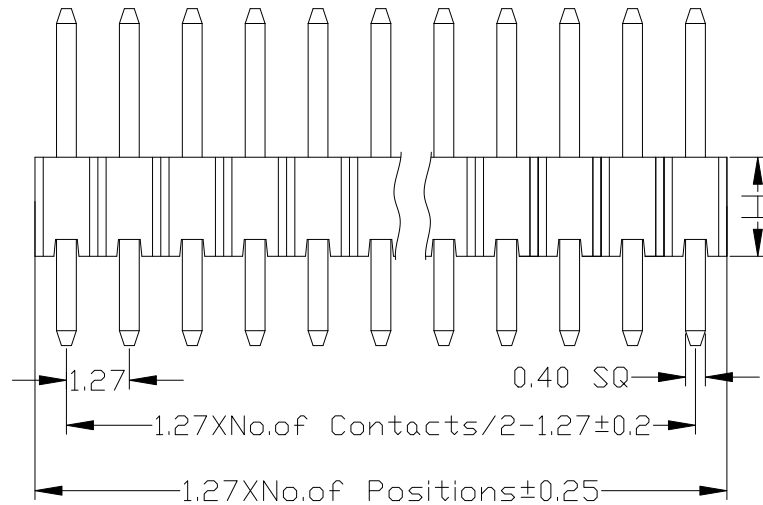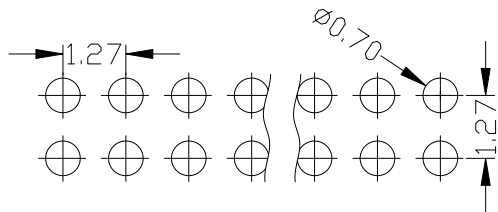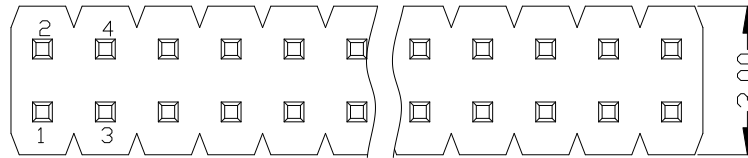

Ordering Information

P3XX-12 XX XX X S XXXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
16:1.6	2m50P	Full Of Gold	B:PA6T		A:PE Bag
20:2.0mm		A0=0.8u"	C:PA9T		B:Tape & Reel
25:2.54mm		A1=1u"	D:LCP		C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

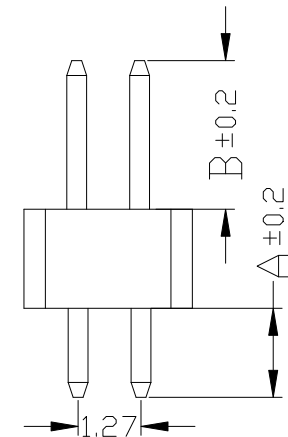

Dimension antitheses list

ITEM	A	B	H
Standard	2.8	1.8	1.6
Alternate			

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

CHECK

APPROVE

Yxcon

东莞市宇熙精密连接器有限公司
Dongguan Yuxi Electronic Co.,Ltd.

卢小强

PART NO.

P3XX-12XXXXXXSXXXX2

TITLE:

1.27mm 排针 双排 180度

Customer No.

REV DATE MODIFICATION DESCRIPTION

CHANGE

APPROVE

[illegible]

1

2

3

4

5

6

7

8

9

10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

2

4

6

8

10

1

3

5

7

9

3.00

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

2

4

6

8

10

1

3

5

7

9

3.00

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.70

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

0.40

SQ

1.27

No.of Contacts/2-1.27±0.2

1.27

No.of Positions±0.25

1

2

3

4

5

6

7

8

9

10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.


耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

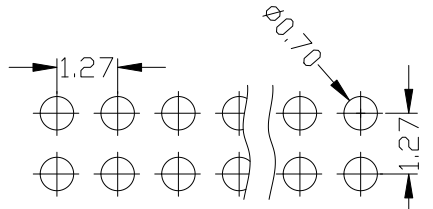


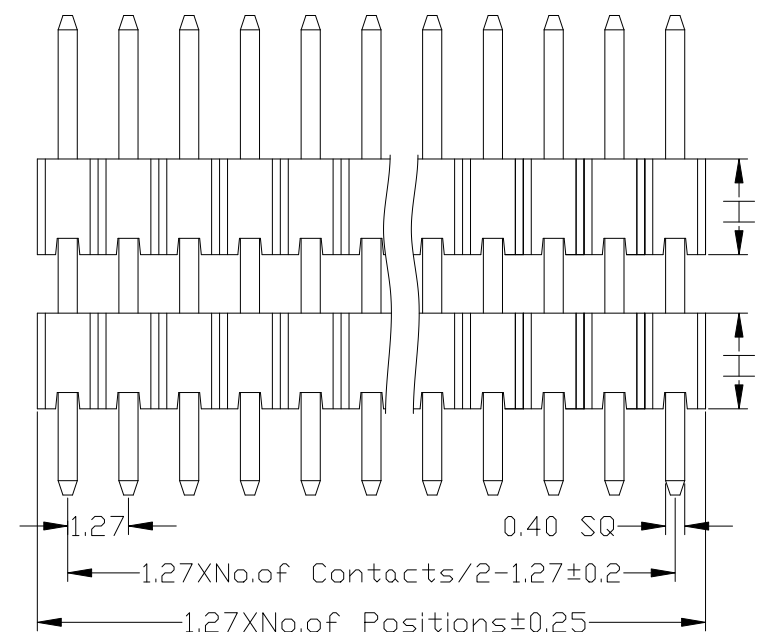

Ordering Information


P3XX-22 XX XX X S XXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
16:1.6	2m50P	Full Of Gold	B:PA6T		A:PE Bag
20:2.0mm		A0=0.8u"	C:PA9T		B:Tape & Reel
25:2.54mm		A1=1u"	D:LCP		C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

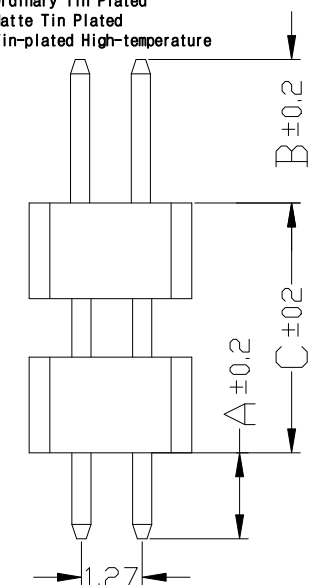

ITEM	C	A	B		H			
Standard		1.8	1.8	3.0	4.0	1.6	2.0	2.54
Alternate								

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.40	UNIT		MM					
				X.XX	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	P3XX-22XXXXXSXXXX2		
				X.XXX	±0.15	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 双塑 180度		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.			
1													
2													
3													
4													
5													
6													
7													
8													
9													
10													

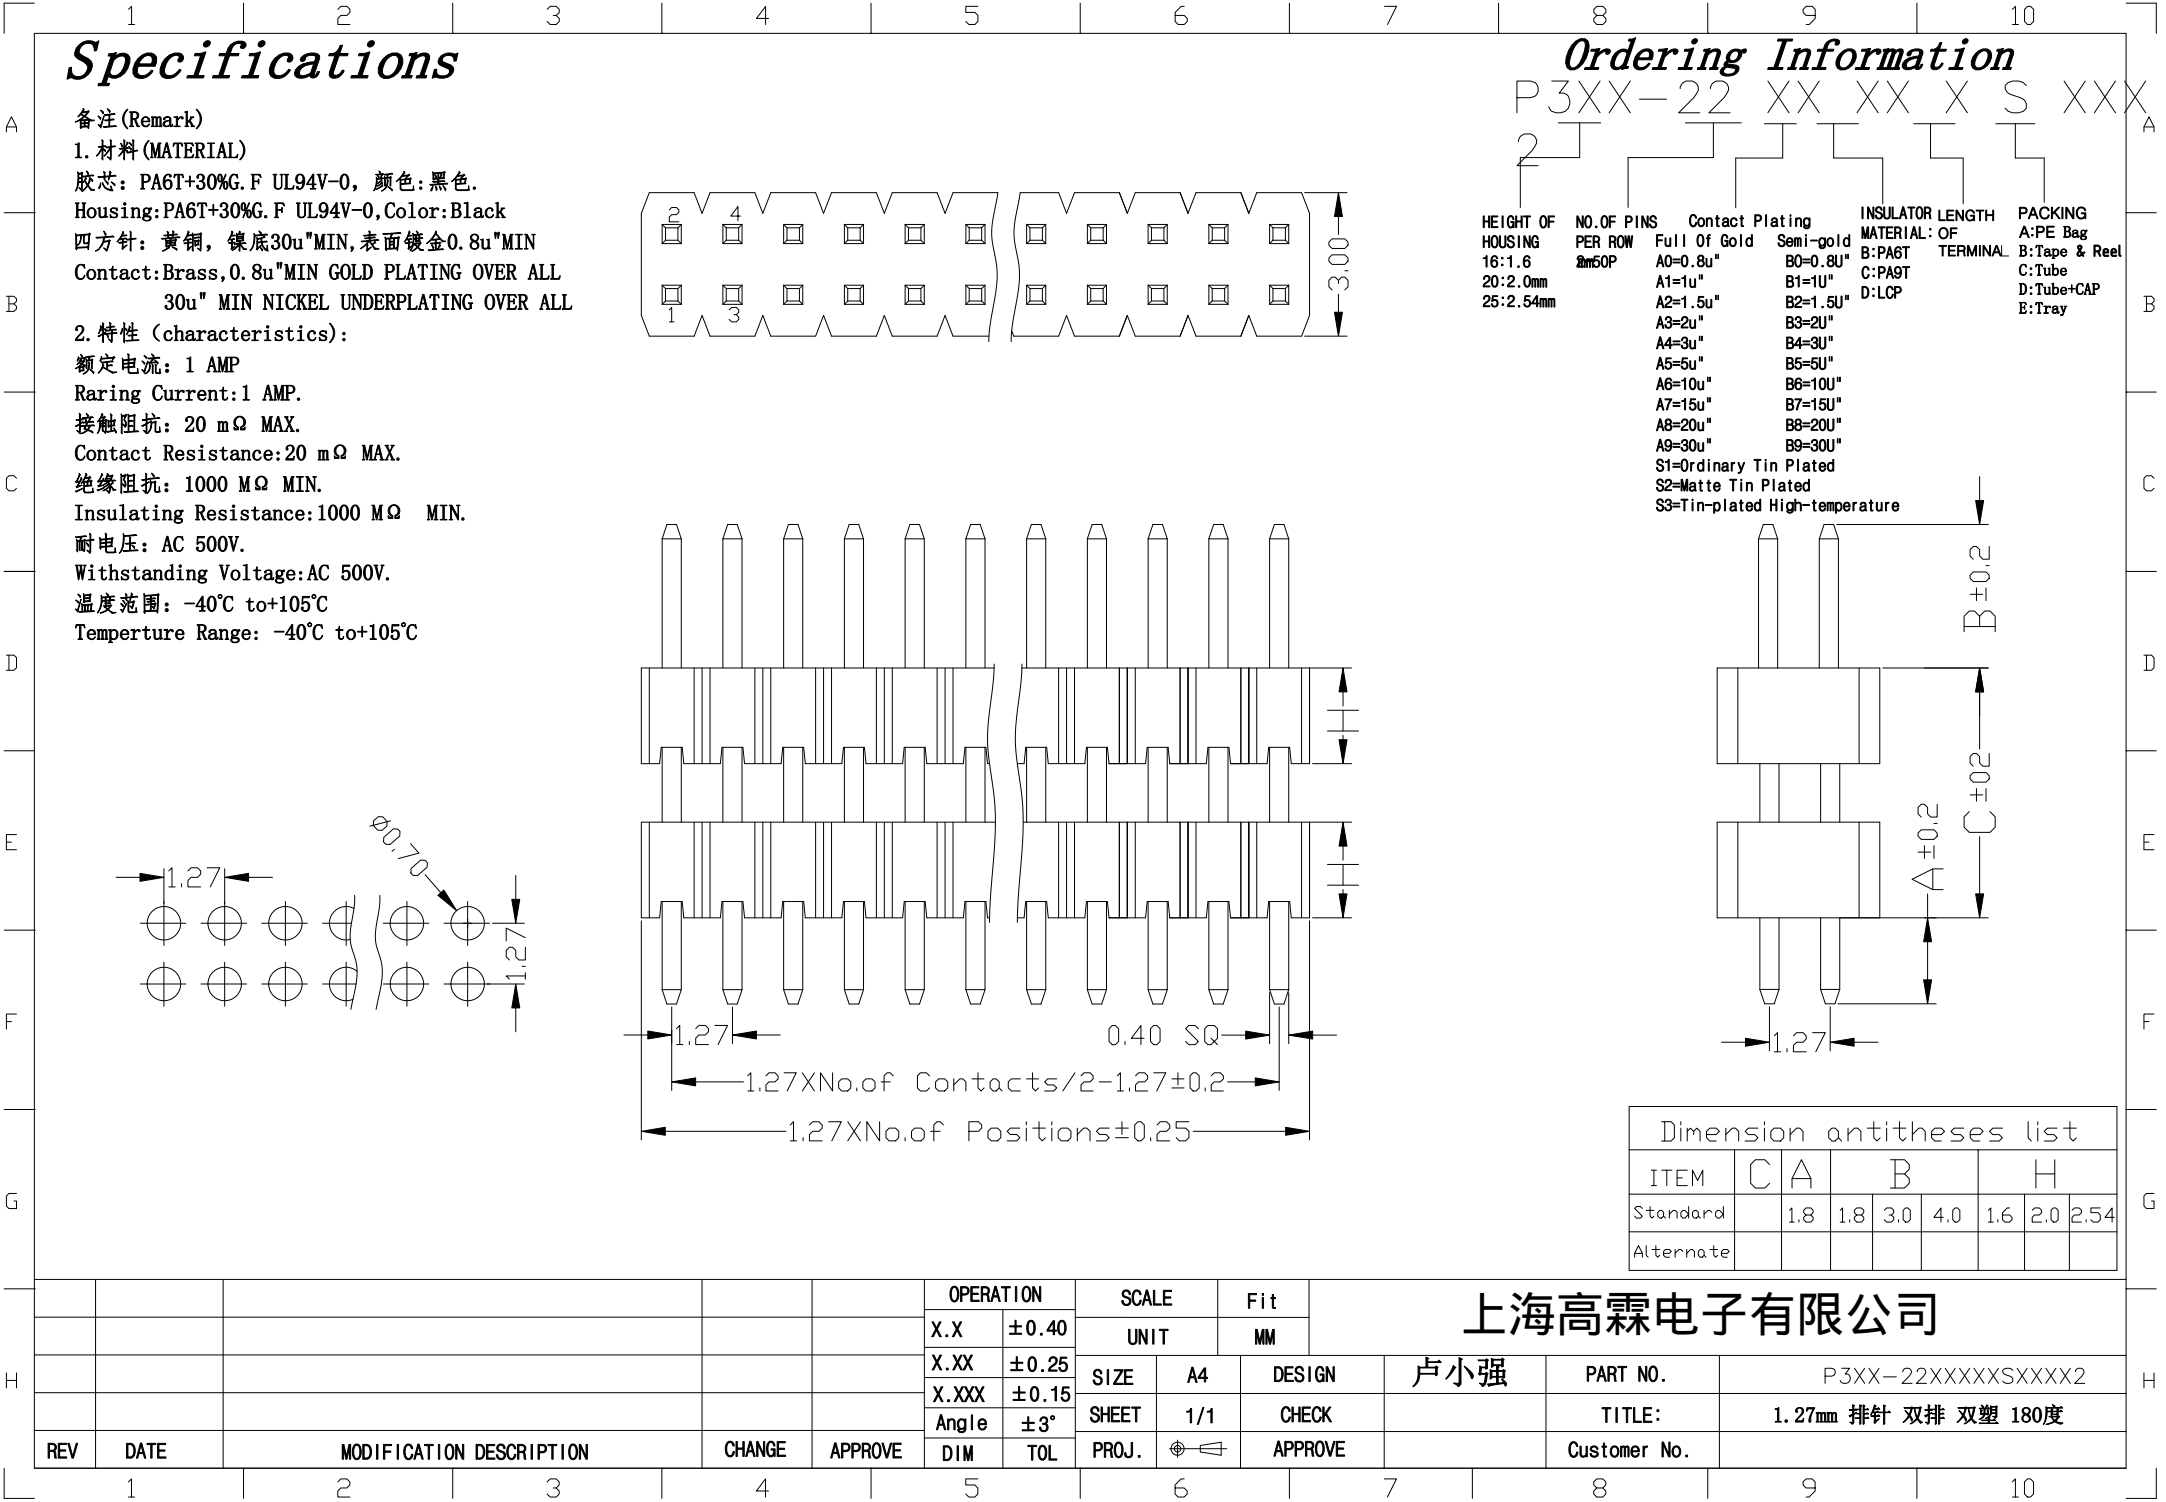[illegible][illegible][illegible]

1

2

3

4

5

6

7

8

9

10

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

Technical drawing of the connector housing showing dimensions and pin layout. The drawing includes a top view with dimensions 1.27, 0.70, and 1.27. It also shows a side view with dimensions 1.27, 0.40, and 1.27. The drawing is labeled with '1.27XNo.of Contacts/2-1.27±0.2' and '1.27XNo.of Positions±0.25'.

Ordering Information

P3XX-22 XX XX X S XXX

2

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
16:1.6	2m50P	Full Of Gold	B:PA6T		A:PE Bag
20:2.0mm		A0=0.8u"	B=0.8U"		B:Tape & Reel
25:2.54mm		A1=1u"	B1=1U"		C:Tube
		A2=1.5u"	B2=1.5U"		D:Tube+CAP
		A3=2u"	B3=2U"		E:Tray
		A4=3u"	B4=3U"		
		A5=5u"	B5=5U"		
		A6=10u"	B6=10U"		
		A7=15u"	B7=15U"		
		A8=20u"	B8=20U"		
		A9=30u"	B9=30U"		
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

Technical drawing of the connector assembly showing dimensions and pin layout. The drawing includes a side view with dimensions A±0.2, B±0.2, and C±0.2. It also shows a top view with dimensions 1.27 and 0.40. The drawing is labeled with '1.27XNo.of Contacts/2-1.27±0.2' and '1.27XNo.of Positions±0.25'.

Dimension antitheses list							
ITEM	C	A	B		H		
Standard		1.8	1.8	3.0	4.0	1.6	2.0
Alternate						2.54	

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE A4

SHEET 1/1

PROJ.

Fit

MM

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE: 1.27mm 排针 双排 双塑 180度

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				

1

2

3

4

5

6

7

8

9

10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.


耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

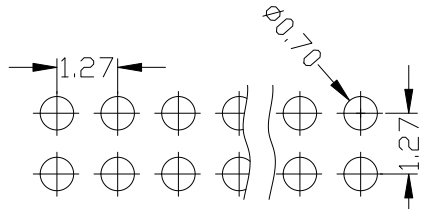

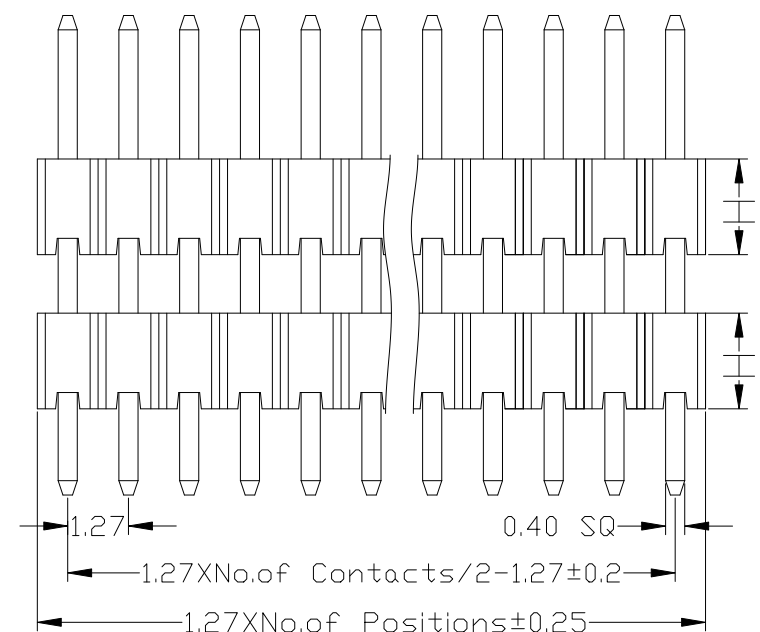

Ordering Information

P3XX-22 XX XX X S XXX

2

HEIGHT OF HOUSING

16:1.6

20:2.0mm

25:2.54mm

NO.OF PINS PER ROW

2m50P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR MATERIAL: OF

B:PA6T

C:PA9T

D:LCP

LENGTH OF TERMINAL

PACKING


A:PE Bag

B:Tape & Reel

C:Tube

D:Tube+CAP

E:Tray

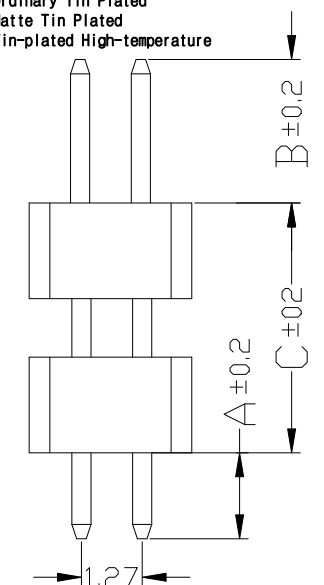

Dimension antitheses list							
ITEM	C	A	B		H		
Standard		1.8	1.8	3.0	4.0	1.6	2.0
Alternate						2.54	

OPERATION

X.X

X.XX

X.XXX

Angle

DIM

±0.40

±0.25

±0.15

±3°

TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P3XX-22XXXXXSXXXX2

1.27mm 排针 双排 双塑 180度

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1

2

3

4

5

6

7

8

9

10

1

2

3

4

5

6

7

8

9

10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

2

4

6

8

10

1

3

5

7

9

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

1.27

[illegible][illegible]

12345678910

Specifications

备注(Remark)

1. 材料(MATERIAL)
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 1 AMP
 Raring Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperture Range: -40°C to +105°C

Dimension antitheses list							
ITEM	C	A	B		H		
Standard		1.8	1.8	3.0	4.0	1.6	2.0
Alternate						2.54	

Ordering Information

P 3XX-22 XX XX X S XXXX

HEIGHT OF HOUSING
 16: 1.6
 20: 2.0mm
 25: 2.54mm

NO.OF PINS PER ROW
 2m50P

Contact Plating
 Full Of Gold
 A0=0.8u"
 A1=1u"
 A2=1.5u"
 A3=2u"
 A4=3u"
 A5=5u"
 A6=10u"
 A7=15u"
 A8=20u"
 A9=30u"
 S1=Ordinary Tin Plated
 S2=Matte Tin Plated
 S3=Tin-plated High-temperature

INSULATOR MATERIAL: OF
 B:PA6T
 C:PA9T
 D:LCP

LENGTH OF TERMINAL
 A:PE Bag
 B:Tape & Reel
 C:Tube
 D:Tube+CAP
 E:Tray

12345678910

			OPERATION		SCALE		Fit	上海高霖电子有限公司			
			X.X	±0.40	UNIT		MM				
			X.XX	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	P3XX-22XXXXXSXXXX2	
			X.XXX	±0.15	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 双塑 180度	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		

12345678910

[illegible]

1

2

3

4

5

6

7

8

9

10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.


耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

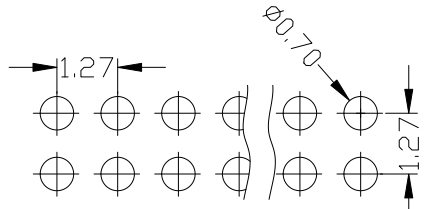


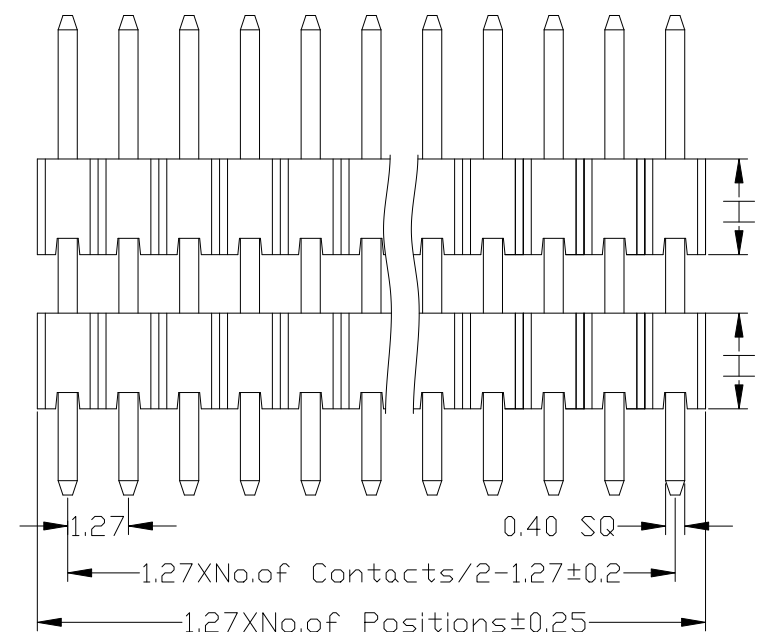

Ordering Information

P3XX-22 XX XX X S XXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
16:1.6	2m50P	Full Of Gold	B:PA6T		A:PE Bag
20:2.0mm		A0=0.8u"	C:PA9T		B:Tape & Reel
25:2.54mm		A1=1u"	D:LCP		C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

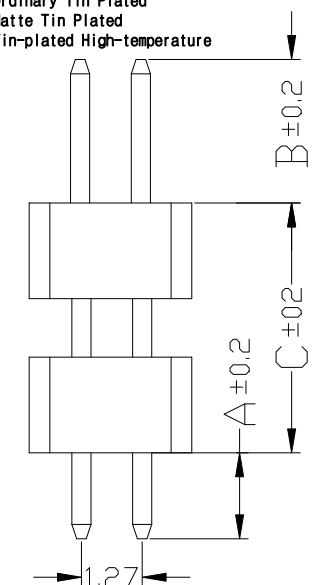

ITEM	C	A	B		H			
Standard		1.8	1.8	3.0	4.0	1.6	2.0	2.54
Alternate								

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.40	UNIT		MM					
					X.XX	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	P3XX-22XXXXXSXXXX2		
					X.XXX	±0.15	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 双塑 180度		
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.			
1														
2														
3														
4														
5														
6														
7														
8														
9														
10														

	1	2	3	4	5	6	7	8	9	10																											
A	Specifications 备注(Remark) 1. 材料(MATERIAL) 胶芯: PA6T+30%G.F UL94V-0, 颜色:黑色. Housing:PA6T+30%G. F UL94V-0,Color:Black 四方针: 黄铜, 镍底30u"MIN,表面镀金0.8u"MIN Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL 30u" MIN NICKEL UNDERPLATING OVER ALL 2. 特性 (characteristics): 额定电流: 1 AMP Raring Current:1 AMP. 接触阻抗: 20 mΩ MAX. Contact Resistance:20 mΩ MAX. 绝缘阻抗: 1000 MΩ MIN. Insulating Resistance:1000 MΩ MIN. 耐电压: AC 500V. Withstanding Voltage:AC 500V. 温度范围: -40℃ to+105℃ Temperture Range: -40℃ to+105℃							Ordering Information P3XX-22 XX XX X S XXXX HEIGHT OF HOUSING 16:1.6 20:2.0mm 25:2.54mm NO.OF PINS PER ROW 2m50P Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U" INSULATOR MATERIAL: OF C:PA9T D:LCP LENGTH OF TERMINAL PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray																													
B								Dimension antitheses list <table border="1"><thead><tr><th>ITEM</th><th>C</th><th>A</th><th colspan="2">B</th><th colspan="3">H</th></tr></thead><tbody><tr><td>Standard</td><td></td><td>1.8</td><td>1.8</td><td>3.0</td><td>4.0</td><td>1.6</td><td>2.0</td><td>2.54</td></tr><tr><td>Alternate</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>				ITEM	C	A	B		H			Standard		1.8	1.8	3.0	4.0	1.6	2.0	2.54	Alternate								
ITEM	C	A	B		H																																
Standard		1.8	1.8	3.0	4.0	1.6	2.0	2.54																													
Alternate																																					
C																																					
D																																					
E																																					
F																																					
G																																					
H																																					

OPERATION		SCALE		Fit	
X.X	±0.40	UNIT		MM	
X.XX	±0.25	SIZE	A4	DESIGN	
X.XXX	±0.15	SHEET	1/1	CHECK	
Angle	±3°	PROJ.		APPROVE	
DIM	TOL				

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	卢小强	PART NO.	P3XX-22XXXXXSXXXX2
						TITLE:	1.27mm 排针 双排 双塑 180度
						Customer No.	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C



Temperture Range: -40°C to +105°C

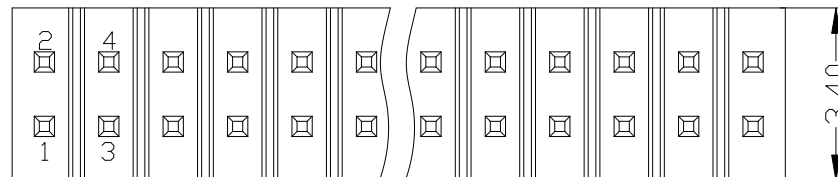

Ordering Information

P310-12 XX XX X S XXXA X

HEIGHT OF HOUSING 10:1.0mm	NO.OF PINS PER ROW 2-50P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: OF B:PA6T C:PA9T D:LCP	LENGTH OF TERMINAL	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

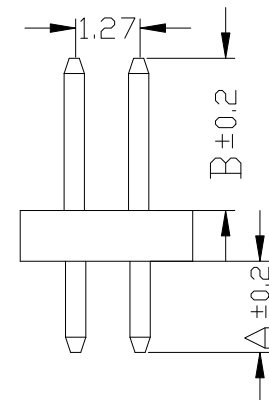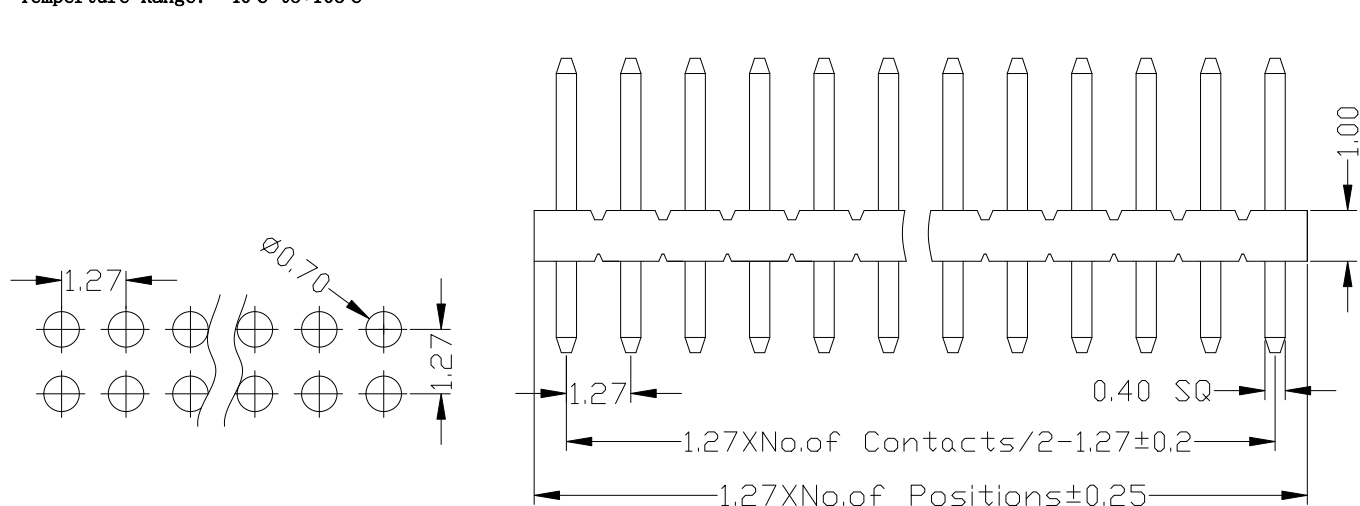

Dimension antitheses list

ITEM	A	B		
Standard	1.8	1.8	3.0	4.0
Alternate				

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

Fit

MM

上海高霖电子有限公司

SIZE

A4

DESIGN

卢小强

PART NO.

P310-12XXXXXSXXXX3

SHEET

1/1

CHECK

TITLE:

1.27mm 排针 双排 塑高1.0 180度

PROJ.

APPROVE

Customer No.

REV DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

A

B

C



D

F

F

G

H

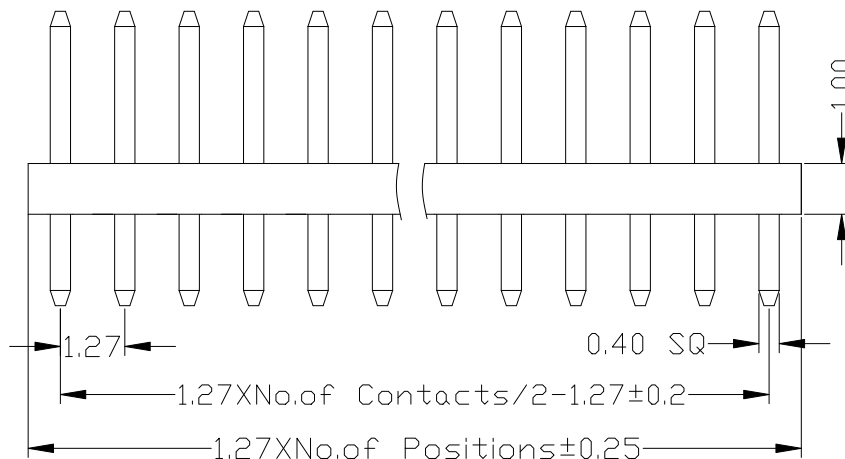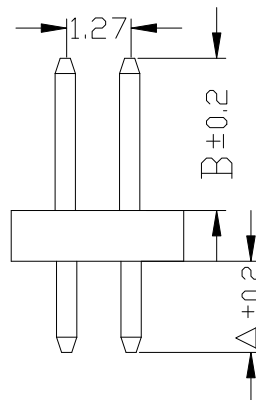

Ordering Information

P310-12	XX	XX	X	S	XXX ^A	X
---------	----	----	---	---	------------------	---

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact	Plating	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
10:1.0mm	2~50P	Full Of Gold	Semi-gold	B:PA6T		A:PE Bag
		A0=0.8u"	B0=0.8U"	C:PA9T		B:Tape & Reel
		A1=1u"	B1=1U"	D:LCP		C:Tube
		A2=1.5u"	B2=1.5U"			D:Tube+CAP
		A3=2u"	B3=2U"			E:Tray
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P310-12XXXXXSXXXX2
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 塑高1.0 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

上海高霖电子有限公司