

1 2 3 4 5 6 7 8 9 10

Specifications

A 备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镀底30μ"MIN, 表面镀金0.8μ"MIN

Contact: Brass, 0.8μ"MIN GOLD PLATING OVER ALL
30μ" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

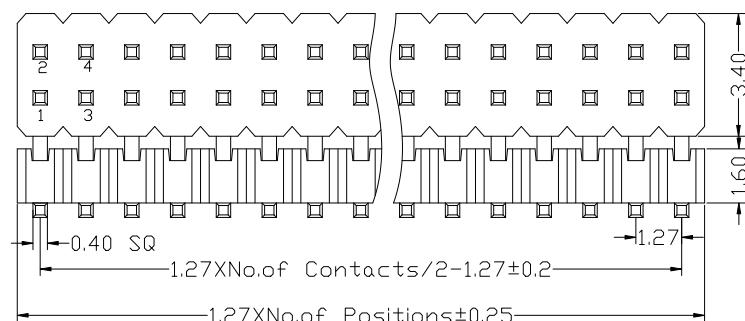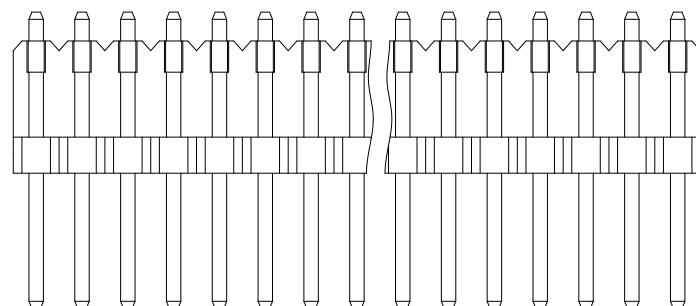

Ordering Information

P 316-22	XX	XX	X	Z	102
1					
NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING	
2~50P	Full Of Gold	A:PBT		A:PE Bag	
	A0=0.8u"	B0=0.8U"		B:Tape & Reel	
	A1=1u"	B1=1U"		C:Tube	
	A2=1.5u"	B2=1.5U"		D:Tube+CAP	
	A3=2u"	B3=2U"		E:Tray	
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

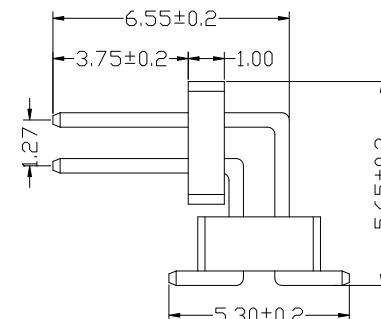

上海高霖电子有限公司

				OPERATION		SCALE		Fit						
				X.XX	±0.25	UNIT	MM	SIZE	A4	DESIGN	卢小强	PART NO.		
				X.XX	±0.20								P 316-2215XXXXZ102X1	
				X.XXX	±0.10									
				Angle	±3°	SHEET	1/1	CHECK					TITLE:	1.27mm双排针 双塑 卧式SMT 塑高=1.6+1.0 L=10.2
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE			Customer No.	

1 2 3 4 5 6 7 8 9 10

1 2 3 4 5 6 7 8 9 10

Specifications

A 备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镀底30μ"MIN, 表面镀金0.8μ"MIN

Contact: Brass, 0.8μ"MIN GOLD PLATING OVER ALL
30μ" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C



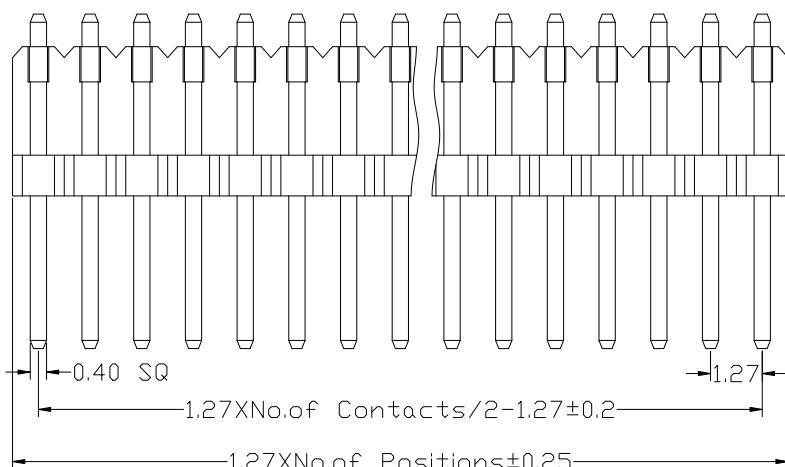


Ordering Information

P 316-22 XX XX X Z 102^A X

2

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
2-50P	Full Of Gold	Semi-gold		
	A0=0.8u"	B0=0.8u"	A:PBT	A:PE Bag
	A1=1u"	B1=1u"	B:PA6T	B:Tape & Reel
	A2=1.5u"	B2=1.5u"	C:PA9T	C:Tube
	A3=2u"	B3=2u"	D:LCP	D:Tube+CAP
	A4=3u"	B4=3u"		E:Tray
	A5=5u"	B5=5u"		
	A6=10u"	B6=10u"		
	A7=15u"	B7=15u"		
	A8=20u"	B8=20u"		
	A9=30u"	B9=30u"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

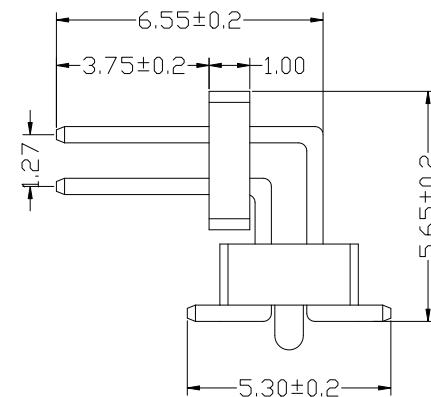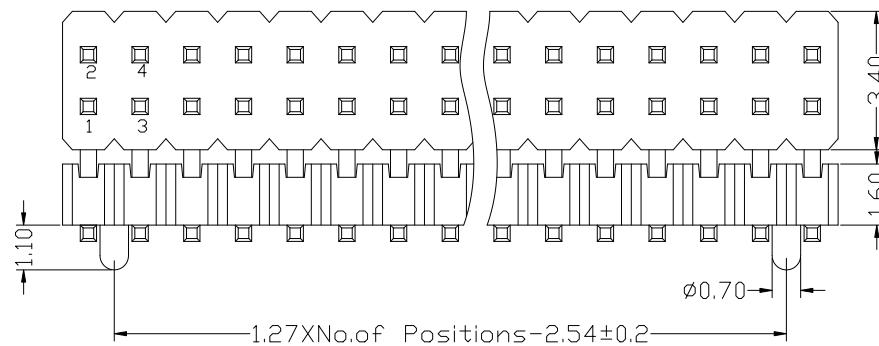

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	卢小强	PART NO.	TITLE:	Customer No.
					X.XX	±0.25	UNIT	MM					
					X.XX	±0.20							
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK				
							DIM	TOL	APPROVE				
							PROJ.						

上海高霖电子有限公司

1 2 3 4 5 6 7 8 9 10