

A

B

C

D

E

F



E

D

5

F

Q

T

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

A

B

C

D

F

F

1

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperture Range: -40°C to+105°C

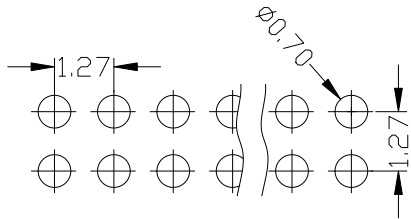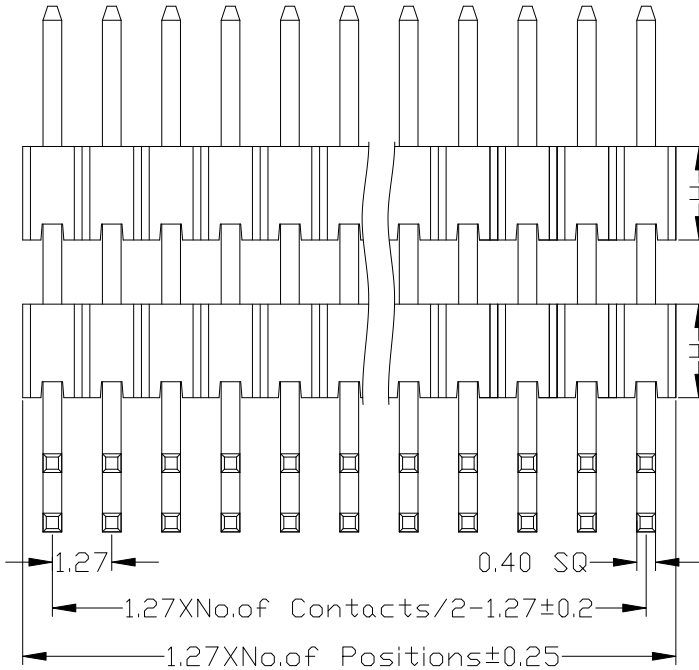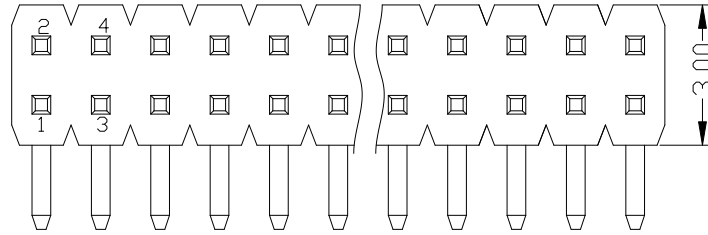

Ordering Information

P3XX-22 XX XX X R XX X

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full Of Gold	Plating Semi-gold	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
16:1.6	2m50P	A0=0.8u"	B0=0.8u"	B:PA6T		A:PE Bag
20:2.0mm		A1=1u"	B1=1u"	C:PA9T		B:Tape & Reel
25:2.54mm		A2=1.5u"	B2=1.5u"	D:LCP		C:Tube
		A3=2u"	B3=2u"			D:Tube+CAP
		A4=3u"	B4=3u"			E:Tray
		A5=5u"	B5=5u"			
		A6=10u"	B6=10u"			
		A7=15u"	B7=15u"			
		A8=20u"	B8=20u"			
		A9=30u"	B9=30u"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

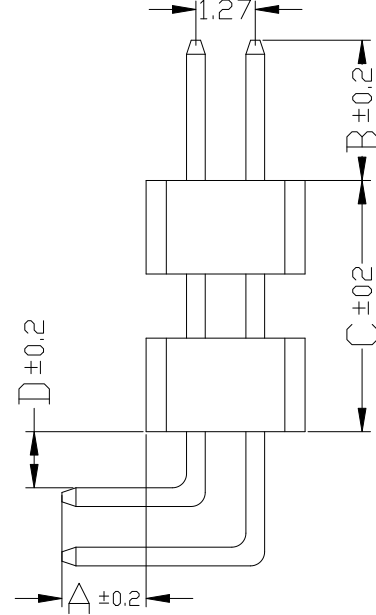

Dimension antitheses list

ITEM	C	A	B	H	D
Standard		1.8	1.8	3.0	4.0
Alternate					

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P3XX-22XXXXXXRXXXX4




1.27mm 排针 双排 双塑 90度

REV DATE MODIFICATION DESCRIPTION

CHANGE APPROVE


Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to+105°C
Temperture Range: -40°C to+105°C

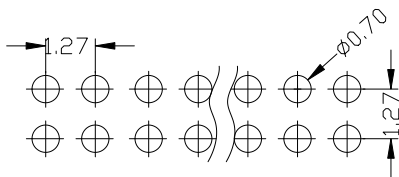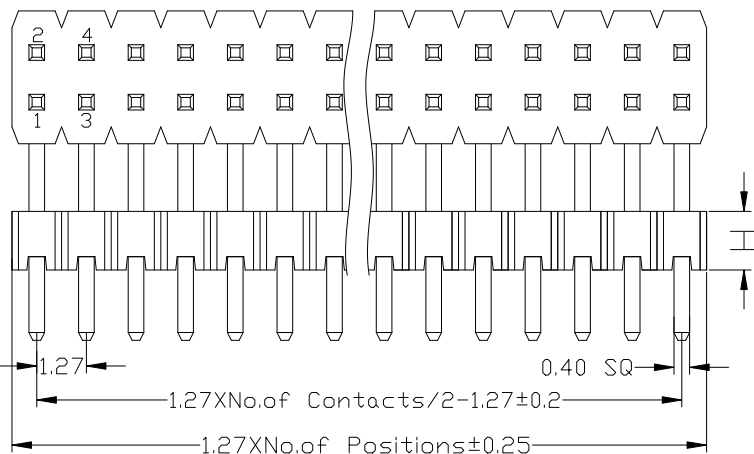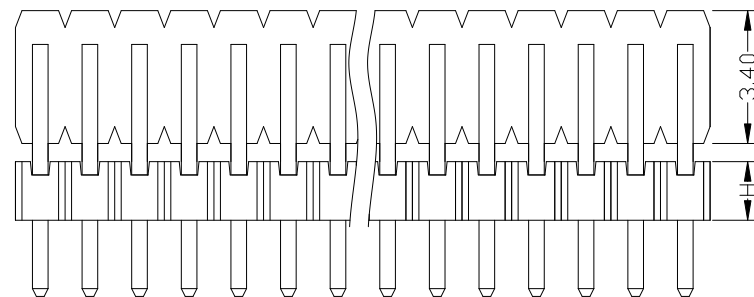

Ordering Information

P	3	X	X	-	2	2	X	X	X	X	R	X	X	X	X
HEIGHT OF HOUSING		NO.OF PINS PER ROW		Contact Plating		INSULATOR MATERIAL: OF		LENGTH		PACKING					
08:0.8mm		2~50P		Full Of Gold		B: PA6T		TERMINAL		A:PE Bag					
10:1.0mm				A0=0.8u"		C: PA9T				B:Tape & Reel					
15:1.5mm				A1=1u"		D: LCP				C:Tube					
				A2=1.5u"						D:Tube+CAP					
				A3=2u"											
				A4=3u"											
				A5=5u"											
				A6=10u"											
				A7=15u"											
				A8=20u"											
				A9=30u"											
				S1=Ordinary Tin Plated											
				S2=Matte Tin Plated											
				S3=Tin-plated High-temperature											

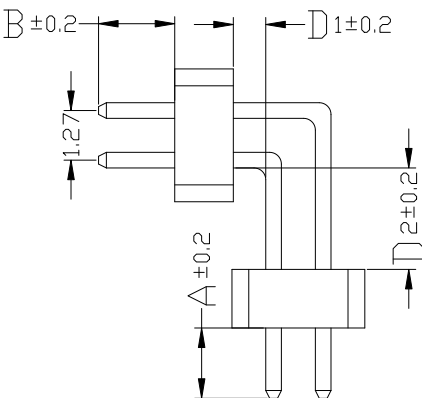

Dimension antitheses list

ITEM	D		A		B		H		C
Standard	0	1.2	1.8	1.8	3.0	4.0	0.8	1.0	1.5
Alternate									

						OPERATION		SCALE		Fit	上海高霖电子有限公司				
						X.X	±0.25	UNIT		MM					
						X.XX	±0.20	SIZE	A4	DESIGN					
						X.XXX	±0.10	SHEET	1/1	CHECK	卢小强	PART NO.	P3XX-22XXXXXXRXXXX2		
						Angle	±3°								
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE		Customer No.	1.27mm 排针 双排 双塑 90度		

A

B

C



D

E

F

G

H

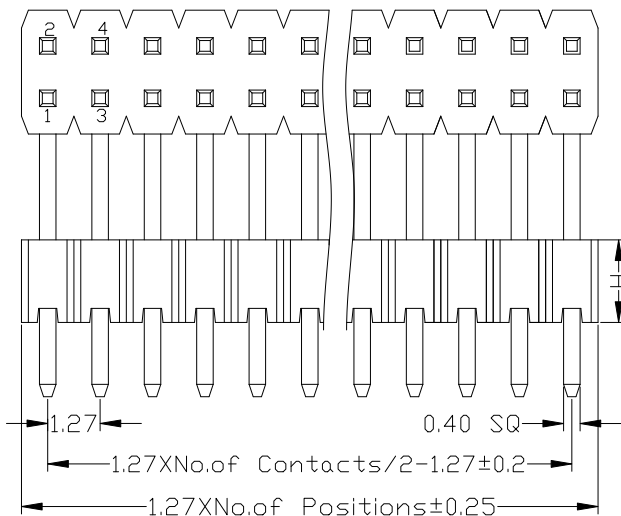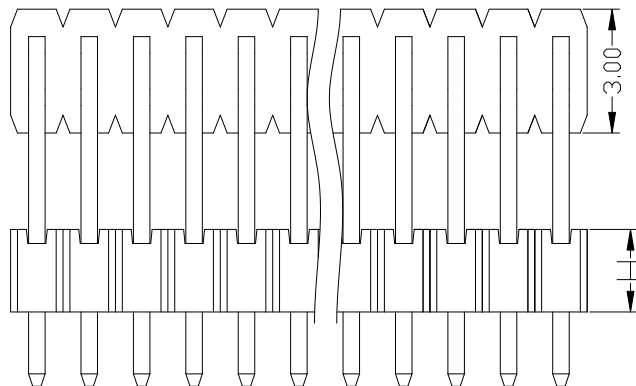

P3XX-22 XX XX X R XX

NO.OF PINS
PER ROW
250P

NO.OF PINS
PER ROW
250P


Contact
 Full Of Gold
 A0=0.8u"
 A1=1u"
 A2=1.5u"

Plating
Semi-gold
B0=0.8U
B1=1U
B2=1.5U

INSULATOR
MATERIAL:
B:PA6T
C:PA9T
D:LCP

LENGTH
OF
TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

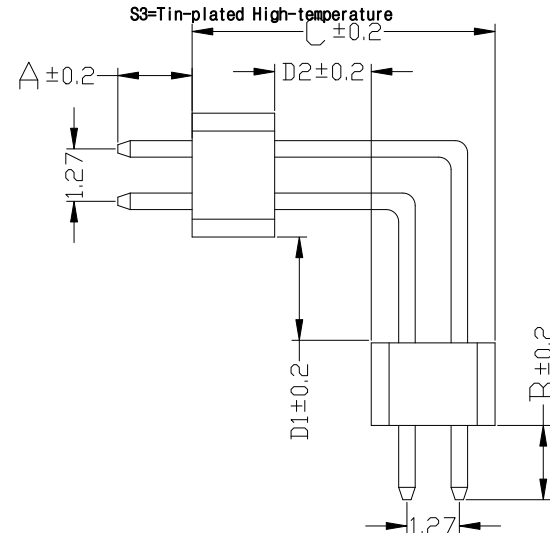[illegible][illegible]

卢小强

PART NO.

P3XX-22XXXXRXXXX3

TITLE:

1.27mm 排针 双排 双塑 90度

Customer No.	
--------------	--

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.40	UNIT		MM				
					X.XX	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	P3XX-22XXXXRXXXX3	
					X.XXX	±0.15							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 双塑 90度	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

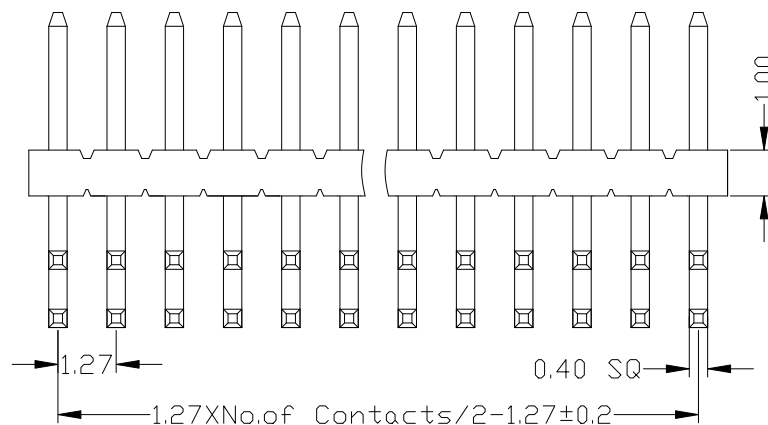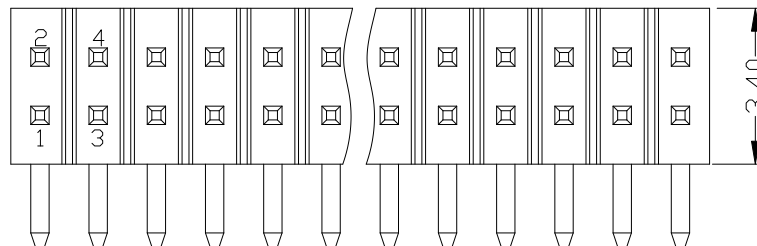

Ordering Information

P310-12 XX XX X R XXXX A X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
10:1.0mm	2~50P	Full Of Gold	B:PA6T		A:PE Bag
		A0=0.8u"	C:PA9T		B:Tape & Reel
		A1=1u"	D:LCP		C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

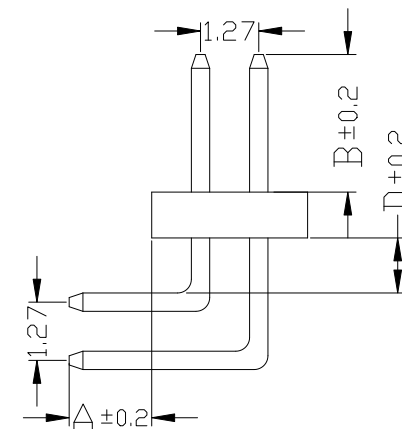

Dimension antitheses list					
ITEM	A	B	C	D	E
Standard	1.8	1.8	3.0	4.0	0 1.2
Alternate					

上海高霖电子有限公司

				OPERATION		SCALE		Fit				
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P310-12XXXXXXRXXXX3	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 双排 塑高1.0 90度	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

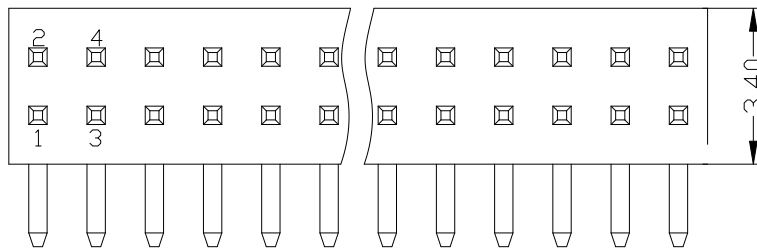

Ordering Information

P310-12 XX XX X R XXXX A X

HEIGHT OF HOUSING 10:1.0mm	NO.OF PINS PER ROW 2~50P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: OF B:PA6T C:PA9T D:LCP	LENGTH OF TERMINAL	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

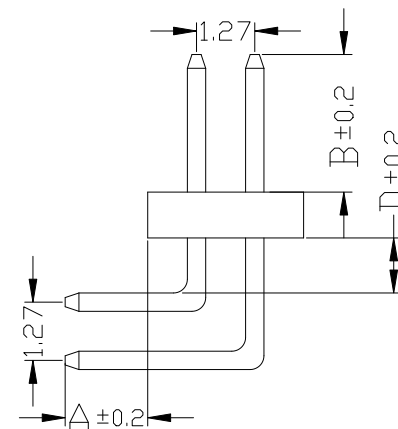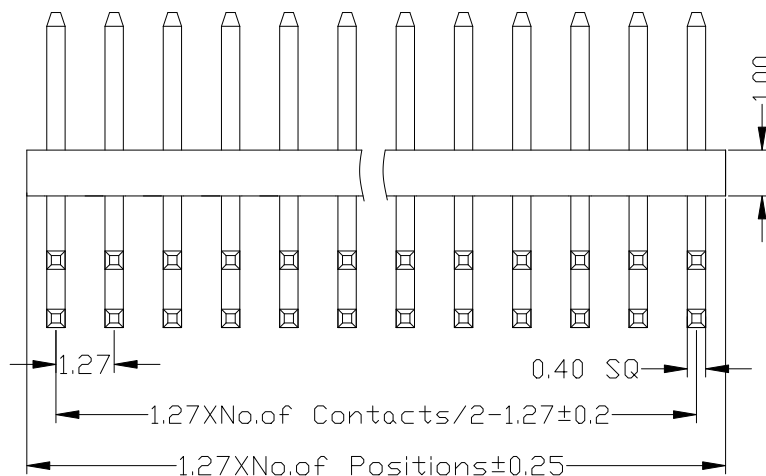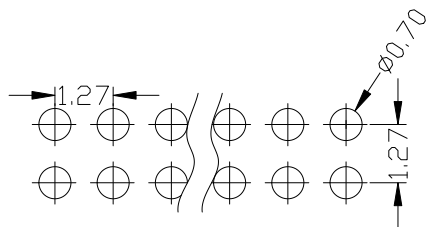


Dimension antitheses list						
ITEM	A	B		D		
Standard	1.8	1.8	3.0	4.0	0	1.2
Alternate						

上海高霖电子有限公司

						OPERATION		SCALE		Fit						
						X.X		UNIT		MM						
						X.XX		SIZE		A4	DESIGN	卢小强	PART NO.	P310-12XXXXXXRXXXX2		
						X.XXX		SHEET		1/1	CHECK		TITLE:	1.27mm 排针 双排 塑高1.0 90度		
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.			



Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperture Range: -40°C to +105°C

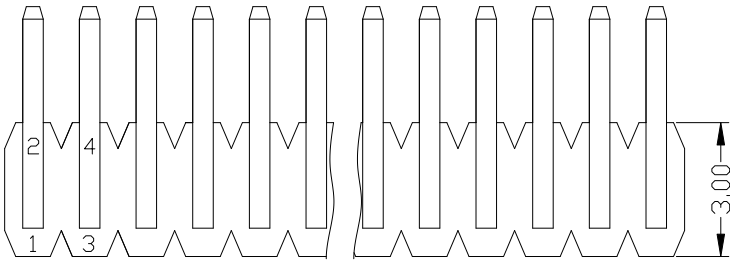

Ordering Information

P325-12								XX	XX	X	R	XX	X	A	X
1															
HEIGHT OF HOUSING	NO.OF PINS	Contact Plating		INSULATOR MATERIAL: OF		INSULATOR LENGTH		PACKING							
25:2.5mm	PER ROW	Full Of Gold	Semi-gold	TERMINAL				A:PE Bag							
	2-50P	A0=0.8u"	B0=0.8U"					B:Tape & Reel							
		A1=1u"	B1=1U"					C:Tube							
		A2=1.5u"	B2=1.5U"					D:Tube+CAP							
		A3=2u"	B3=2U"					E:Tray							
		A4=3u"	B4=3U"												
		A5=5u"	B5=5U"												
		A6=10u"	B6=10U"												
		A7=15u"	B7=15U"												
		A8=20u"	B8=20U"												
		A9=30u"	B9=30U"												
		S1=Ordinary Tin Plated													
		S2=Matte Tin Plated													
		S3=Tin-plated High-temperature													

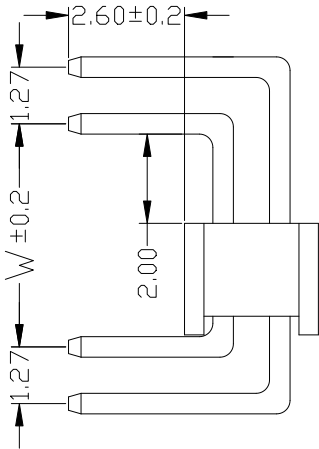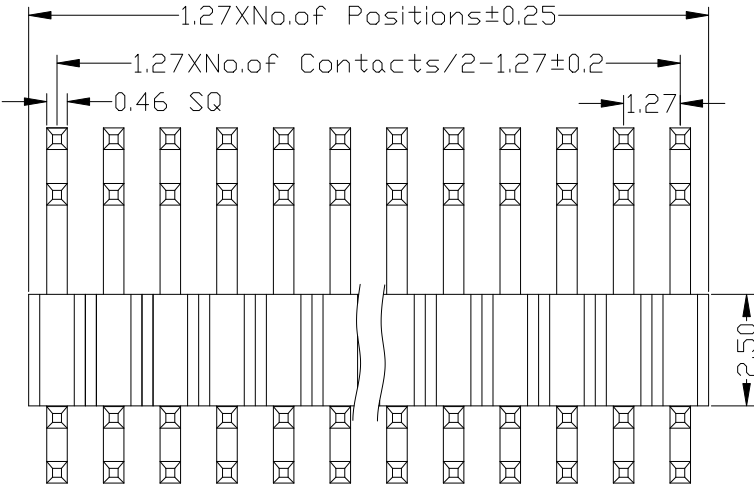

Dimension antitheses list		
ITEM	W	
Standard	5.0	6.0
Alternate		

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.40	UNIT		MM				
					X.XX	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	P325-12XXXXXRXXX1	
					X.XXX	±0.15							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1. 27mm 双排弯针 塑高2.5 桥型	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.	

上海高霖电子有限公司

卢小强 PART NO. P325-12XXXXXXRXXXX1
TITLE: 1.27mm 双排弯针 塑高2.5 桥型
Customer No.