




3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm	
产品信息 Product Information		产品信息 Product Information		产品信息 Product Information		产品信息 Product Information	
IEC/UL数据 IEC/UL Data	IEC UL	锁线螺钉 Locking crew	-	MC-DRT3.5HXXP-A-0001	4-40	附件 Accessory	
额定电流 Rated current [A]	8 8	扭矩 Torque [N·m]	-	MC-DRT3.5HXXP-K-0001	4-40		
额定电压 Rated voltage [V]	160 150	固定螺钉 Fixed screw	M2	MC-DRT3.5HXXP-I-0001	4-40		
硬导线截面积 Solid [mm²][AWG]	0.2-1.5 24-16	扭矩 Torque [N·m]	0.25				
柔性导线截面积 Flexible [mm²][AWG]	0.2-1.5 24-16	剥线长度 Strip length [mm]	9-10				
额定冲击电压 Rated impulse voltage [KV]	2.5 -						

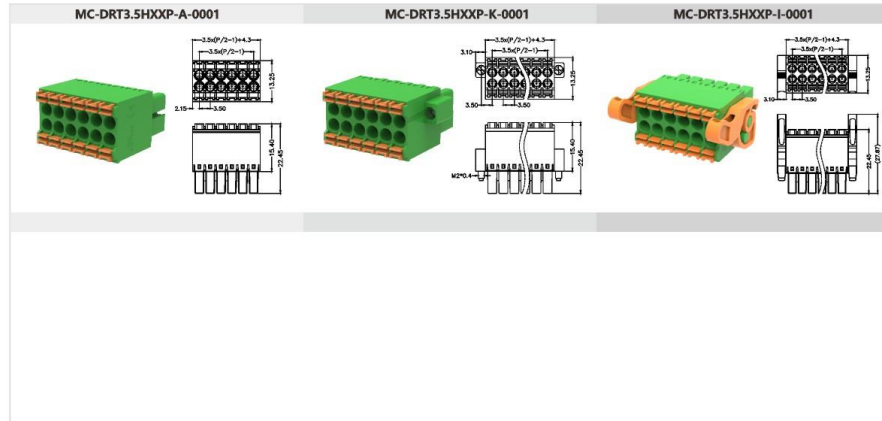

3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm	
产品信息 Product Information		产品信息 Product Information		产品信息 Product Information		产品信息 Product Information	
IEC/UL数据 IEC/UL Data	IEC UL	锁线螺钉 Locking crew	-	MC-DRG3.5HXXP-0001	4-48	附件 Accessory	
额定电流 Rated current [A]	13.5 10	扭矩 Torque [N·m]	-	MC-DRG3.5HXXP-K-0001	4-48		
额定电压 Rated voltage [V]	160 300	固定螺钉 Fixed screw	M2	MC-DRG3.5HXXP-I-0001	4-48		
硬导线截面积 Solid [mm²][AWG]	0.2-1.5 24-16	扭矩 Torque [N·m]	0.2				
柔性导线截面积 Flexible [mm²][AWG]	0.2-1.5 24-16	剥线长度 Strip length [mm]	8-9				
额定冲击电压 Rated impulse voltage [KV]	2.5 -						

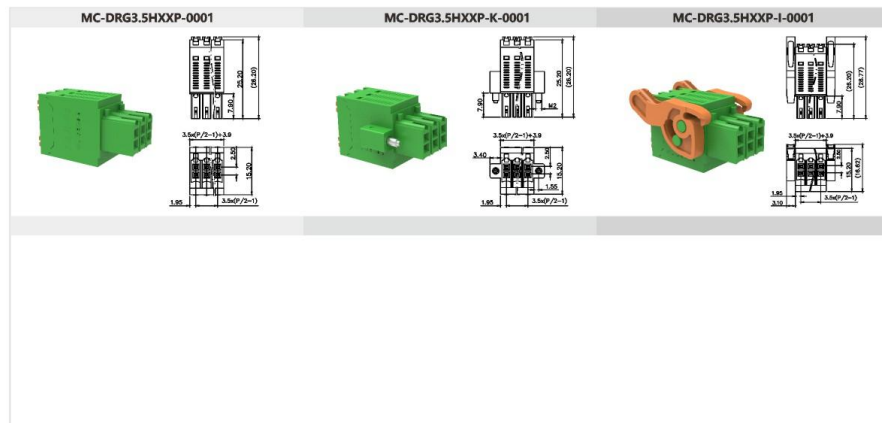

3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm	
产品信息 Product Information		产品信息 Product Information		产品信息 Product Information		产品信息 Product Information	
IEC/UL数据 IEC/UL Data	IEC UL	锁线螺钉 Locking crew	-	MC-DPT3.5VXX-BK-2000	4-40	附件 Accessory	
额定电流 Rated current [A]	8 8	扭矩 Torque [N·m]	-	MC-DPT3.5VXX-F-BK-2000	4-40		
额定电压 Rated voltage [V]	160 150	固定螺钉 Fixed screw	M2.0	MC-DPT3.5VXX-I-BK-2000	4-40		
硬导线截面积 Solid [mm²][AWG]	- -	扭矩 Torque [N·m]	0.2				
柔性导线截面积 Flexible [mm²][AWG]	- -	剥线长度 Strip length [mm]	-				
额定冲击电压 Rated impulse voltage [KV]	2.5 -						

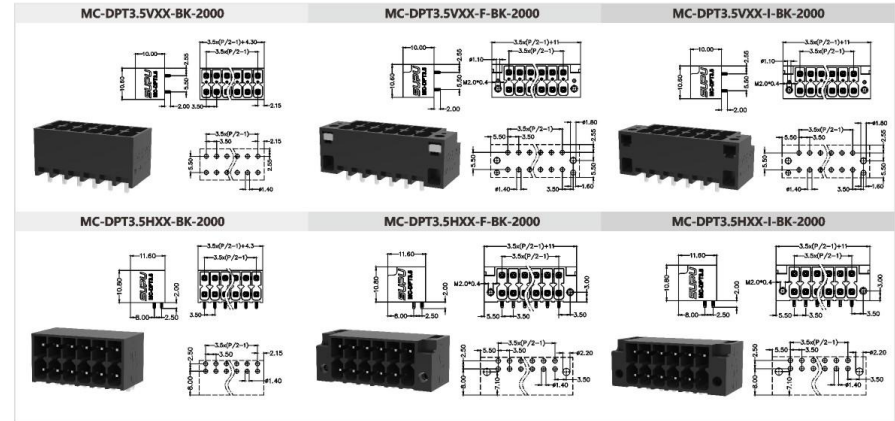

3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm		3.5mm间距 Pitch: 3.5mm	
产品信息 Product Information		产品信息 Product Information		产品信息 Product Information		产品信息 Product Information	
IEC/UL数据 IEC/UL Data	IEC UL	锁线螺钉 Locking crew	-	MC-DPG3.5VXX-3500	4-48	附件 Accessory	
额定电流 Rated current [A]	10 10	扭矩 Torque [N·m]	-	MC-DPG3.5VXX-F-3500	4-48		
额定电压 Rated voltage [V]	125 150	固定螺钉 Fixed screw	M2.0	MC-DPG3.5VXX-I-3500	4-48		
硬导线截面积 Solid [mm²][AWG]	- -	扭矩 Torque [N·m]	0.2				
柔性导线截面积 Flexible [mm²][AWG]	- -	剥线长度 Strip length [mm]	-				
额定冲击电压 Rated impulse voltage [KV]	2.5 -						

