

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

F263-21 XX XX X SY

NO. OF PINS
PER ROW
1~40P

Contact Plating
Full Of Gold

Semi-gold

INSULATOR
MATERIAL:

PACKING
A: PE Bag

A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

B0=0.8U"
B1=1U"
B2=1.5U"
B3=2U"
B4=3U"
B5=5U"
B6=10U"
B7=15U"
B8=20U"
B9=30U"



A: PBT
B: PA6T
C: PA9T
D: LCP

B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray



S1=Ordinary Tin Plated

S2=Matte Tin Plated


S3=Tin-plated High-temperature




2.00

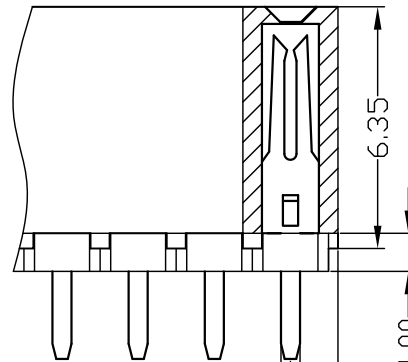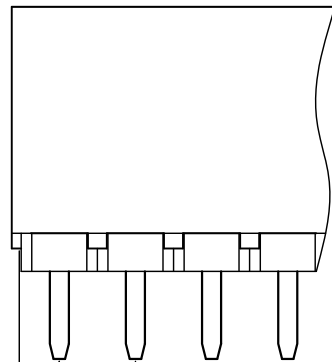

1.00

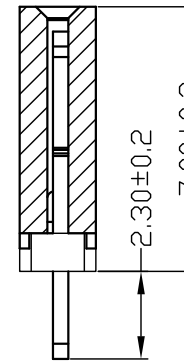

7.00±0.2

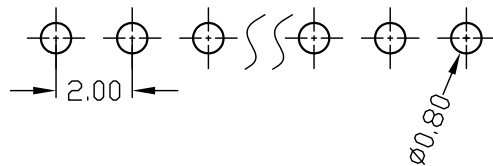

2.00

Ø0.80

2.00

0.50*0.40

2.00xNo.of Contacts-2.00±0.2

2.00xNo.of Positions+0.50±0.25

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SIZE

A4

DESIGN

卢小强

PART NO.

F263-21XXXXXXSYX1

SHEET

1/1

CHECK

TITLE:

2.0mm单排母 塑高6.35 180度 加塑胶 (H=1.0) 总高7.0 Y型

PROJ.

APPROVE

Customer No.

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-----	-----	-------	---------	--------------

1 2 3 4 5 6 7 8 9 10