



# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

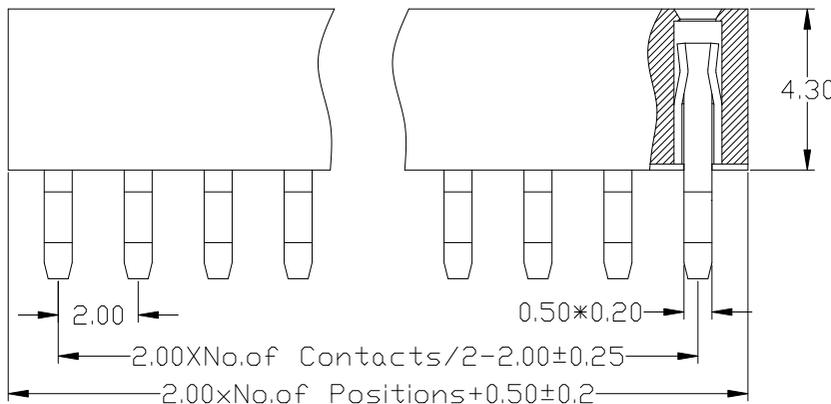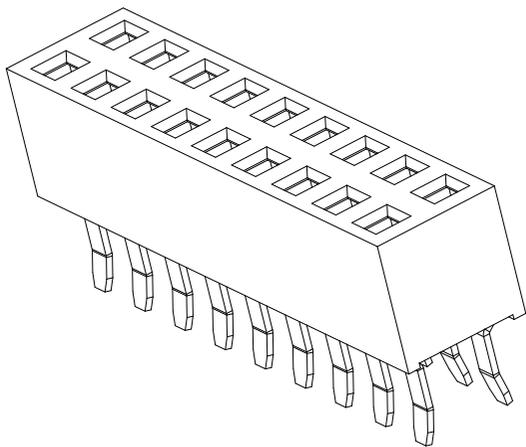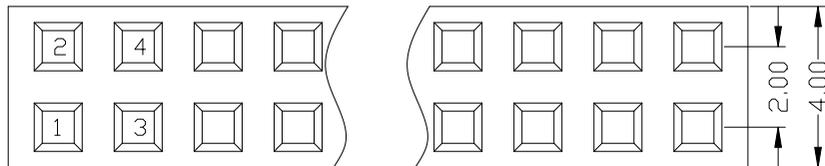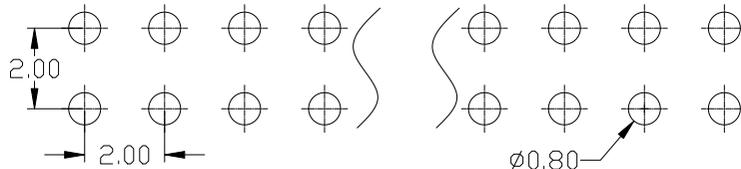

# Ordering Information

F243-12 XX XX X CU AX

NO. OF PINS PER ROW 2~40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	B: PA6T	A: PE Bag
A1=1u"	Semi-gold	C: PA9T	B: Tape & Reel
A2=1.5u"	B0=0.8U"	D: LCP	C: Tube
A3=2u"	B1=1U"		D: Tube+CAP
A4=3u"	B2=1.5U"		E: Tray
A5=5u"	B3=2U"		
A6=10u"	B4=3U"		
A7=15u"	B5=5U"		
A8=20u"	B6=10U"		
A9=30u"	B7=15U"		
	B8=20U"		
	B9=30U"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

上海高霖电子有限公司

OPERATION		SCALE		Fit		上海高霖电子有限公司			
X.X	±0.25	UNIT		MM					
X.XX	±0.20	SIZE	A4	DESIGN		PART NO.		F243-12XXXXXCUX1	
X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:		2.0 双排母 塑高4.3 夹板式 U型	
Angle	±3°	PROJ.	☉	APPROVE		Customer No.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				

卢小强

PART NO.

F243-12XXXXXCUX1

TITLE:

2.0 双排母 塑高4.3 夹板式 U型

Customer No.

# Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

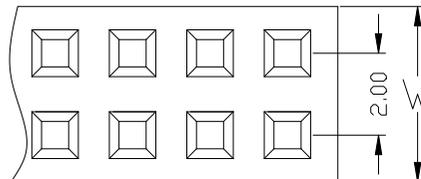

# Ordering Information

F246-12 XX XX X CU AX

NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	PACKING
2~40P	Full Of Gold	Semi-gold	A: PA6T	A: PE Bag
	A0=0.8u"	B0=0.8U"	B: PA6T	B: Tape & Reel
	A1=1u"	B1=1U"	C: PA9T	C: Tube
	A2=1.5u"	B2=1.5U"	D: LCP	D: Tube+CAP
	A3=2u"	B3=2U"		E: Tray
	A4=3u"	B4=3U"		
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
	A8=20u"	B8=20U"		
	A9=30u"	B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

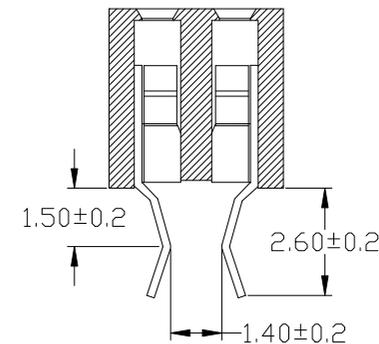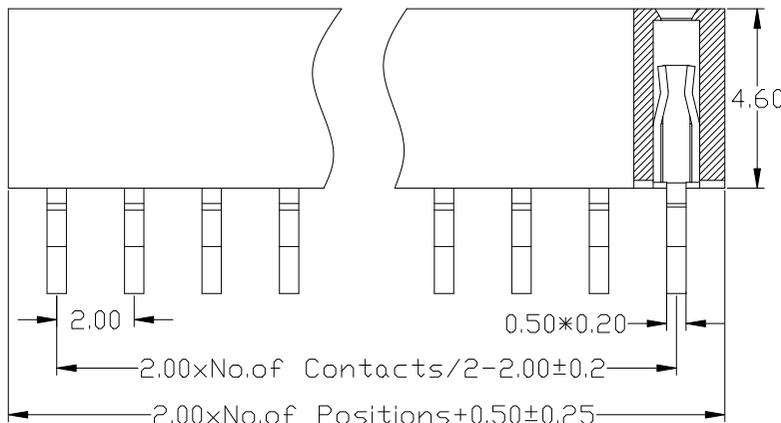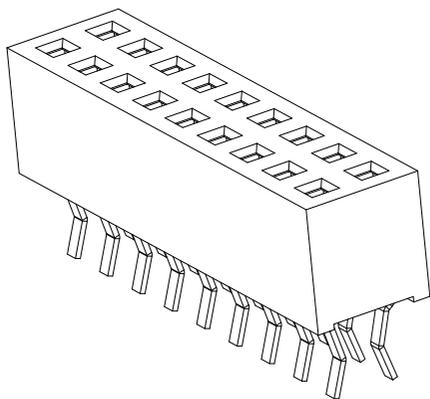

DIM"W" 4.0 4.5

上海高霖电子有限公司

OPERATION		SCALE		Fit		上海高霖电子有限公司			
X.X	±0.25	UNIT		MM					
X.XX	±0.20	SIZE	A4	DESIGN		卢小强	PART NO.	F246-12XXXXXCUX1	
X.XXX	±0.10	SHEET	1/1	CHECK			TITLE:	2.00mm 双排母 塑高4.6 U型 夹板式 U型	
Angle	±3°	PROJ.	☉	APPROVE			Customer No.		
DIM	TOL								
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE					