

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

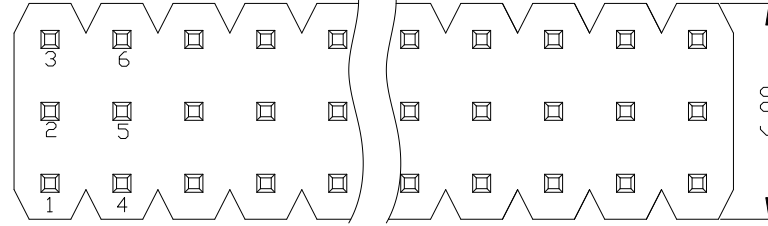

Ordering Information

P2XX-13 XX XX X S XXXX

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm 20:2.0mm	3~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"		A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

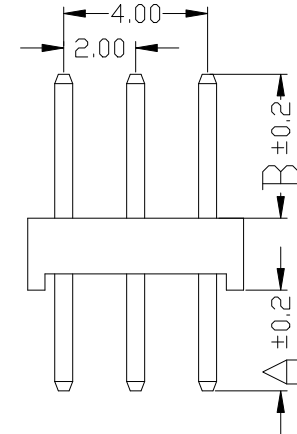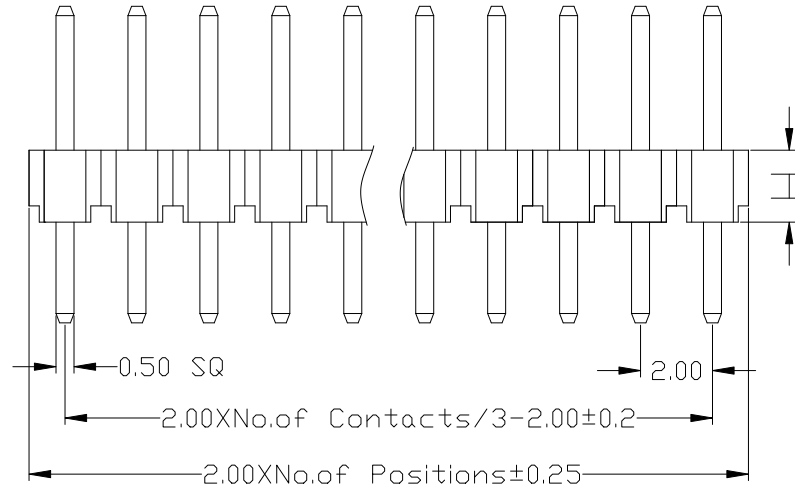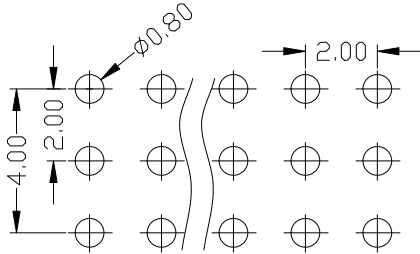

Dimension antitheses list				
ITEM	A	B	H	
Standard	2.8	4.0	1.5	2.0
Alternate				

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-13XXXXXSXXX1		
					X.XXX	±0.10								
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm 排针 三排 180度		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

上海高霖电子有限公司

卢小强

PART NO.

P2XX-13XXXXXSXXXX1

TITLE:

2.0mm 排针 三排 180度

Customer No.

A

B

C

D


E

F

G

H

1

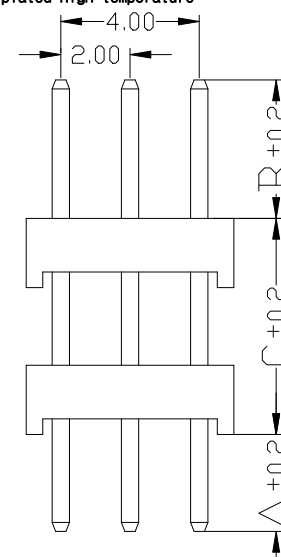

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-23XXXXXSXXX1		
					X.XXX	±0.10								
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm 排针 三排 180度		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

P2XX-23 XX XX X S XX|A

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm	3~40P	Full Of Gold	Semi-gold	B:PA6T		A:PE Bag
20:2.0mm		A0=0.8u"	B0=0.8U"	C:PA9T		B:Tape & Reel
		A1=1u"	B1=1U"	D:LCP		C:Tube
		A2=1.5u"	B2=1.5U"			D:Tube+CAP
		A3=2u"	B3=2U"			E:Tray
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperture Range: -40°C to+105°C

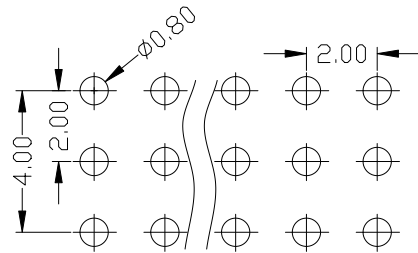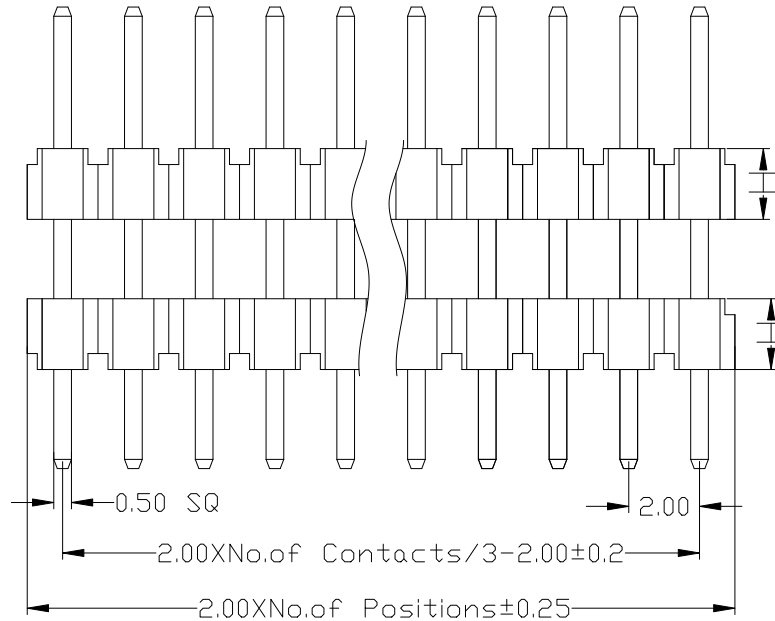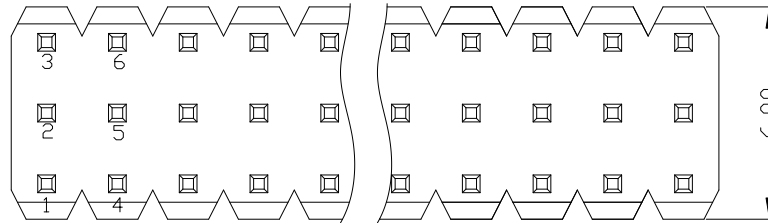

Ordering Information

P2XX-23 XX XX X S XXXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm 20:2.0mm	3~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B:PA6T C:PA9T D:LCP	A:PE Bag B:TOPE & Reeb C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

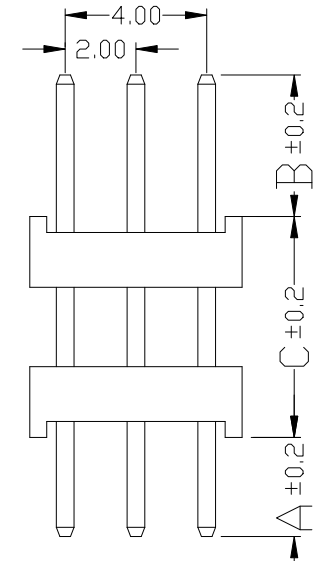

Dimension antitheses list

ITEM	A	B	H	C
Standard	2.8	4.0	1.5	2.0
Alternate				

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE A4

SHEET 1/1

PROJ.

Fit

MM

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P2XX-23XXXXXSXXXX2

2.0mm 排针 三排 双塑 180度

REV DATE MODIFICATION DESCRIPTION

CHANGE

APPROVE

1 2 3 4 5 6 7 8 9 10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

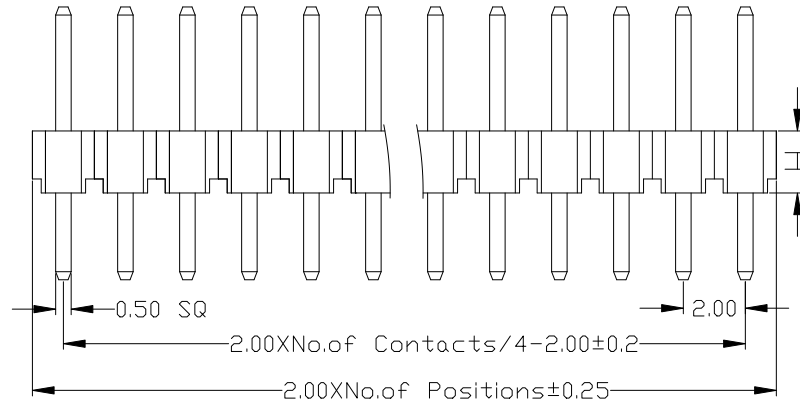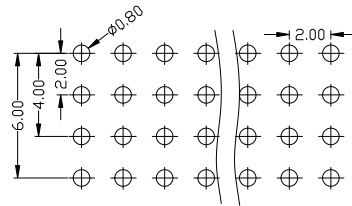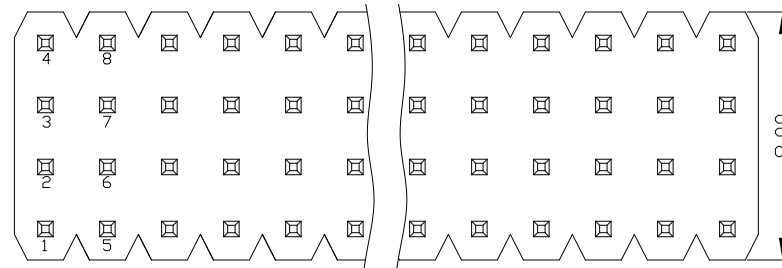

Ordering Information

P2XX-14 XX XX X S XXX

HEIGHT OF
HOUSING
15:1.5mm
20:2.0mm

NO.OF PINS
PER ROW
4~40P


Contact
Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8U"
B1=1U"
B2=1.5U"
B3=2U"
B4=3U"
B5=5U"
B6=10U"
B7=15U"
B8=20U"
B9=30U"

INSULATOR
MATERIAL:
B:PA6T
C:PA9T
D:LCP

LENGTH
OF
TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

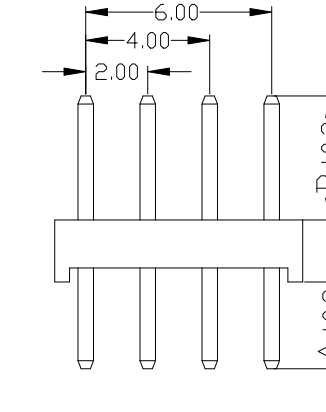

Dimension antitheses list

ITEM	A	B	H	
Standard	2.8	4.0	1.5	2.0
Alternate				

上海高霖电子有限公司

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.40	UNIT		MM				
				X.XX	±0.25	SIZE	A4	DESIGN	卢小强			
				X.XXX	±0.15	SHEET	1/1	CHECK				
				Angle	±3°	PROJ.	APPROVE		PART NO.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL					

P2XX-14XXXXXSXXXX1
2.0mm 排针 四排 180度

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

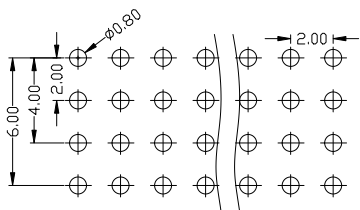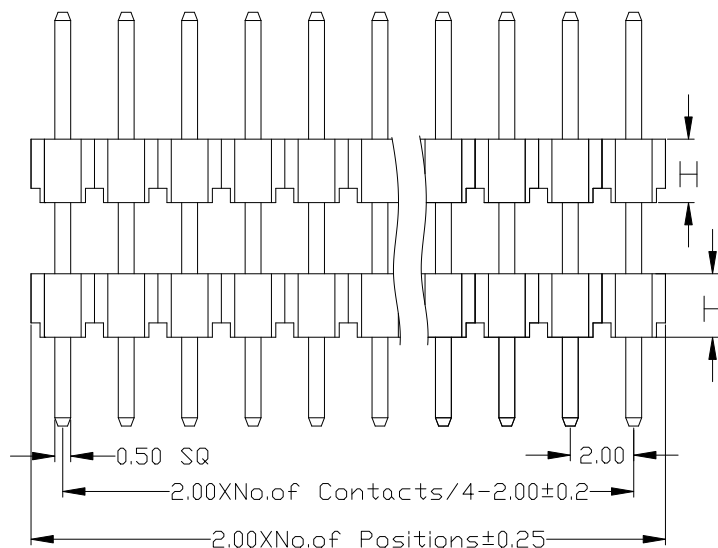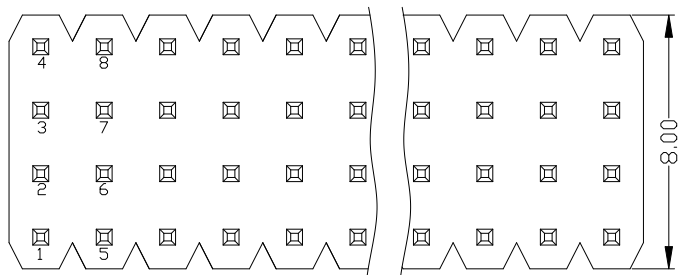

Ordering Information

P2XX-24 XX XX X S XX X

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm 20:2.0mm	4~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B:PA6T C:PA9T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

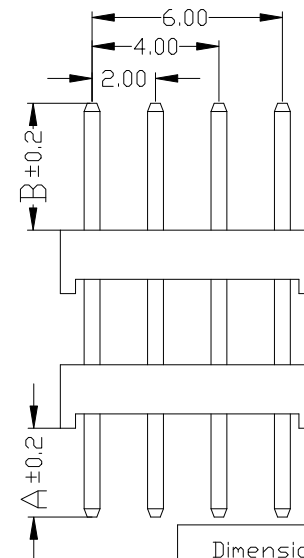

Dimension antitheses list

ITEM	A	B	H	C
Standard	2.8	4.0	1.5	2.0
Alternate				

OPERATION

SCALE

Fit

X.X ±0.40

UNIT

MM

X.XX ±0.25

SIZE

A4

DESIGN

X.XXX ±0.15

SHEET

1/1

CHECK

Angle ±3°

DIM

TOL

PROJ.



APPROVE

上海高霖电子有限公司

卢小强

PART NO.

P2XX-24XXXXXSXXXX1

TITLE:

2.0mm 排针 四排 双塑 180度

Customer No.

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

DIM

TOL

PROJ.

APPROVE

APPROVE

APPROVE

Customer No.

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

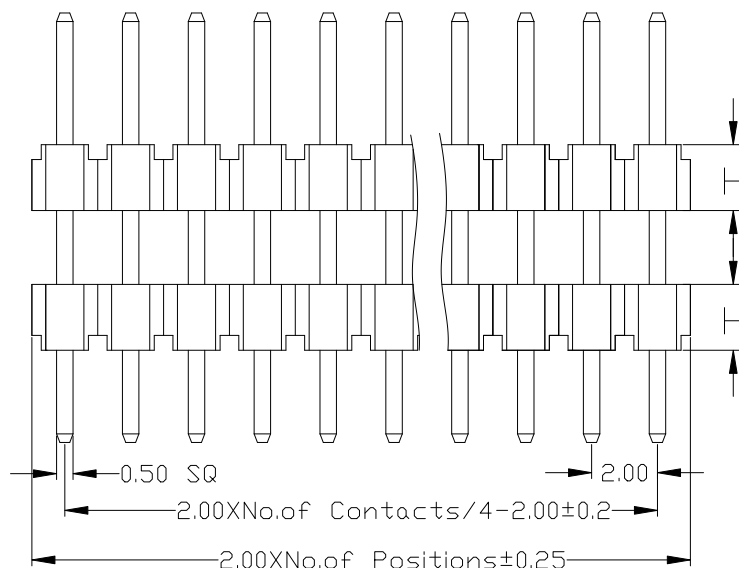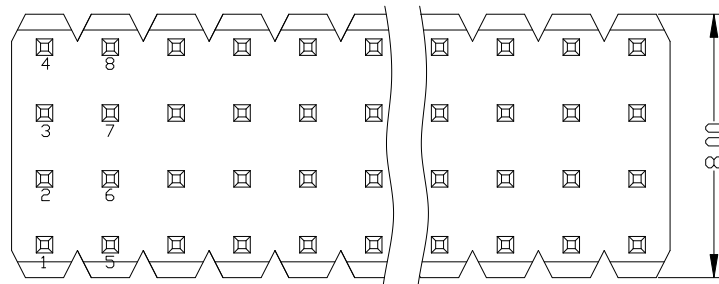

Ordering Information

P2XX-24 XX XX X S XXXX

HEIGHT OF
HOUSING
15:1.5mm
20:2.0mm

NO.OF PINS
PER ROW
4~40P


Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR
MATERIAL:
B:PA6T
C:PA9T
D:LCP

LENGTH
OF
TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

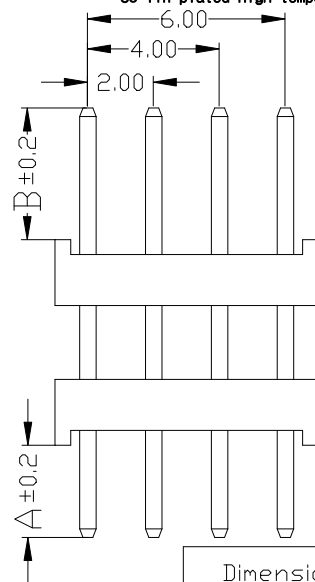

Dimension antitheses list

ITEM	A	B	H	C
Standard	2.8	4.0	1.5	2.0
Alternate				

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ±3°

DIM TOL

SCALE

UNIT

Fit

MM

SIZE

A4

DESIGN

SHEET

1/1

CHECK

PROJ.

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

P220-24XXXXXSXXXX2

TITLE:

2.0mm 排针 四排 双塑 180度 反塑胶

Customer No.

REV DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE