

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

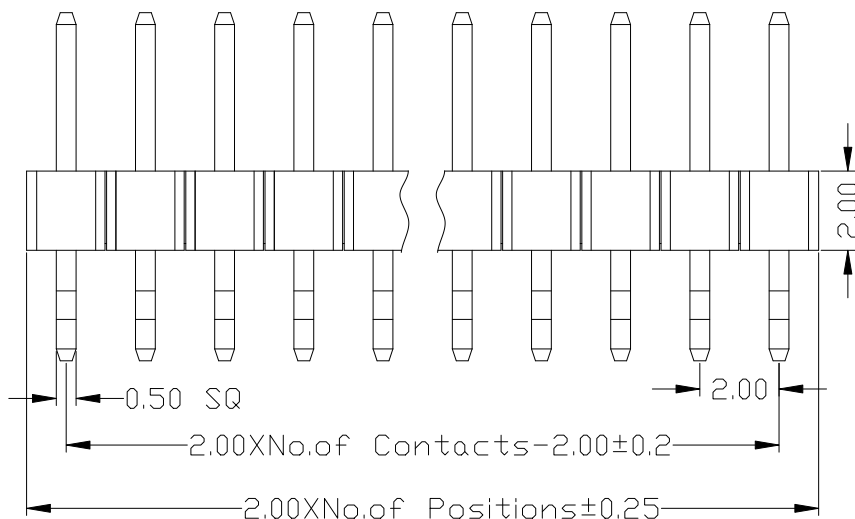

Ordering Information

P220-11 XX XX X Z XXXX

HEIGHT OF HOUSING 20:2.0mm	NO.OF PINS 1~40P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: B:PA6T C:PA9T D:LCP	LENGTH OF TERMINAL	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

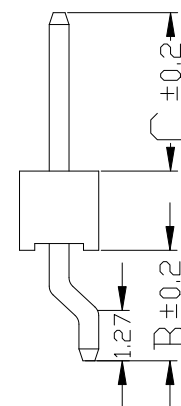

Dimension antitheses list		
ITEM	B	C
Standard	2.8	4.0
Alternate		

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强		PART NO.	P220-11XXXXXZXXXX1
				X.XXX	±0.10	SHEET	1/1	CHECK			TITLE:	2.0mm 单排针 塑高2.0 卧式SMT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	PROJ.	APPROVE			Customer No.		

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

备注(Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针：黄铜，镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40°C to+105°C

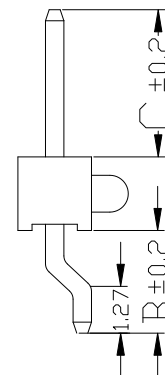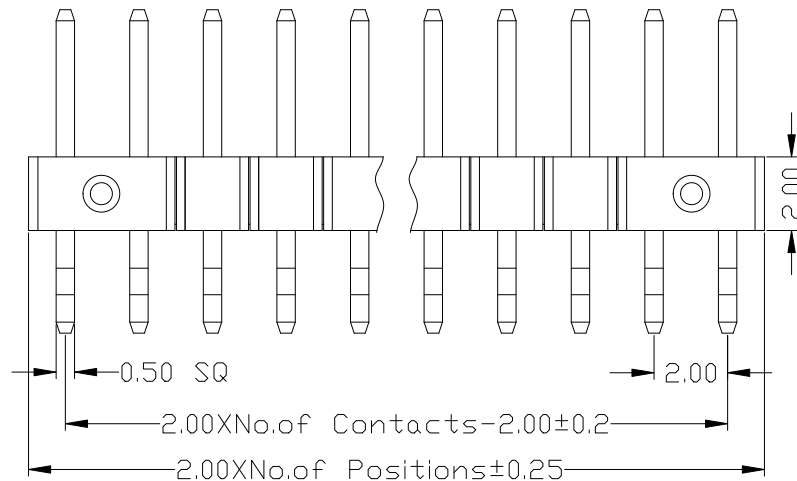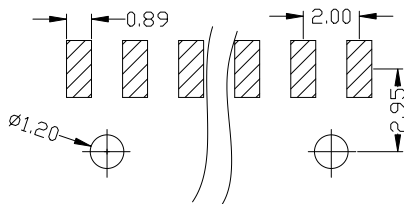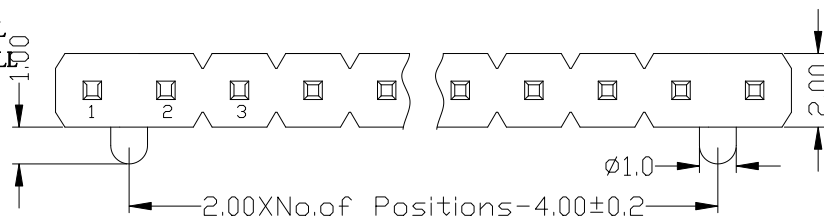

Dimension antitheses list		
ITEM	B	C
Standard	2.8	4.0
Alternate		

P220-11 XX XX X Z XXXX_A X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	1~40P	Full Of Gold	B: PA6T		A: PE Bag
		A0=0.8u"	C: PA6T		B: Tape & Reel
		A1=1u"	D: LCP		C: Tube
		A2=1.5u"			D: Tube+CAP
		A3=2u"			E: Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

上海高霖电子有限公司

					OPERATION		SCALE		Fit		上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P220-11XXXXXXZXXXX2	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm 单排针 塑高2.0 卧式SMT 带侧柱	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

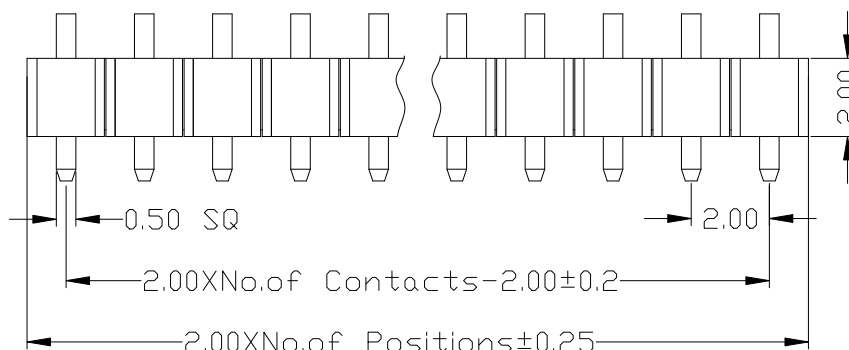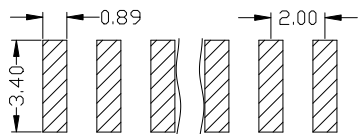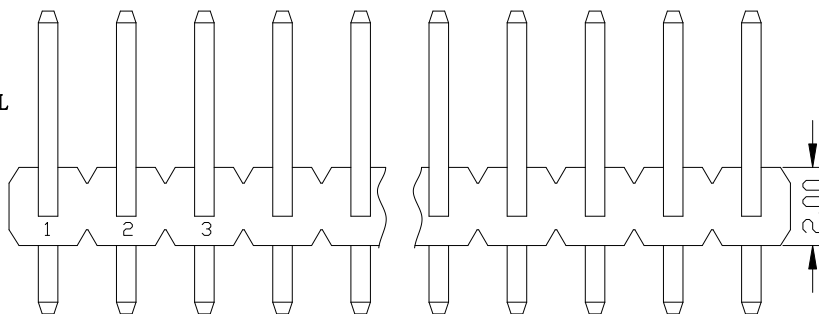

Ordering Information

P220-11 XX XX X Z XXXX

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	1~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray	
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			



Dimension antitheses list		
ITEM	A	C
Standard	1.75	4.0
Alternate		

OPERATION

X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

UNIT

Fit

MM

上海高霖电子有限公司

SIZE

A4

DESIGN

卢小强

PART NO.

P220-11XXXXXXZXXXX3

SHEET

1/1

CHECK

TITLE:

2.0mm 单排针 塑高2.0 卧式SMT

PROJ.

APPROVE

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-----	-----	-------	---------	--------------

1 2 3 4 5 6 7 8 9 10

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

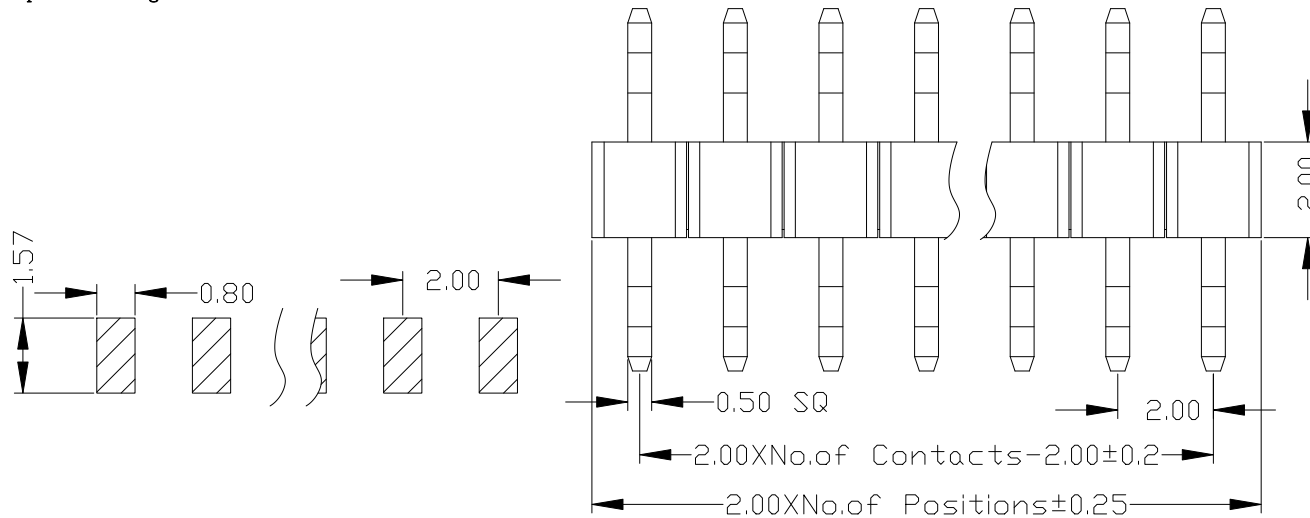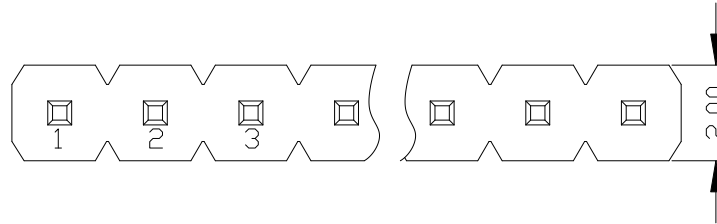

Ordering Information

P220-11 XX XX X Z XXXX

HEIGHT OF HOUSING 20±2.0mm	NO. OF PINS 2~40P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	LENGTH OF TERMINAL	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"			

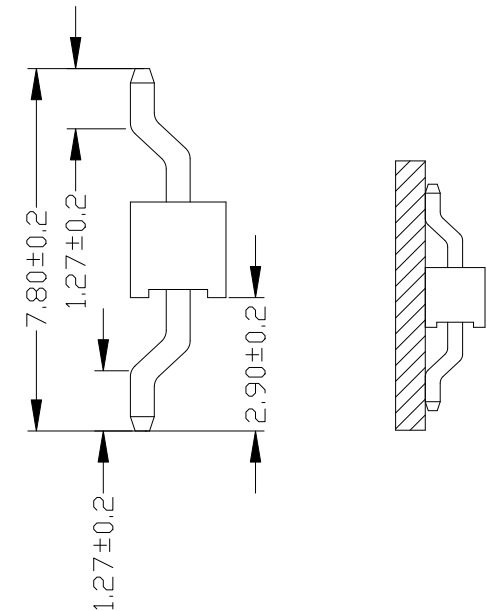

				OPERATION		SCALE		Fit	上海高霖电子有限公司		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强		
				X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.		
				Angle	±3°	PROJ.	1/1	APPROVE	TITLE:		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	APPROVE	Customer No.		

上海高霖电子有限公司

卢小强

PART NO.

P220-11XXXXXXZXXXX1

2.0mm 单排针 卧式SMT

Customer No.