

A

B

C

D


E

F

G

H

11

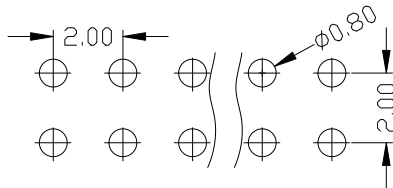

B

C

D

E




F

G



Specifications


备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 2 AMP
Raring Current: 2 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperture Range: -40°C to +105°C

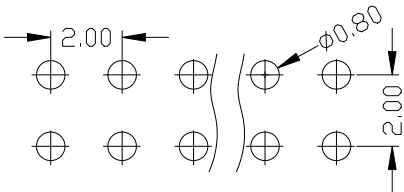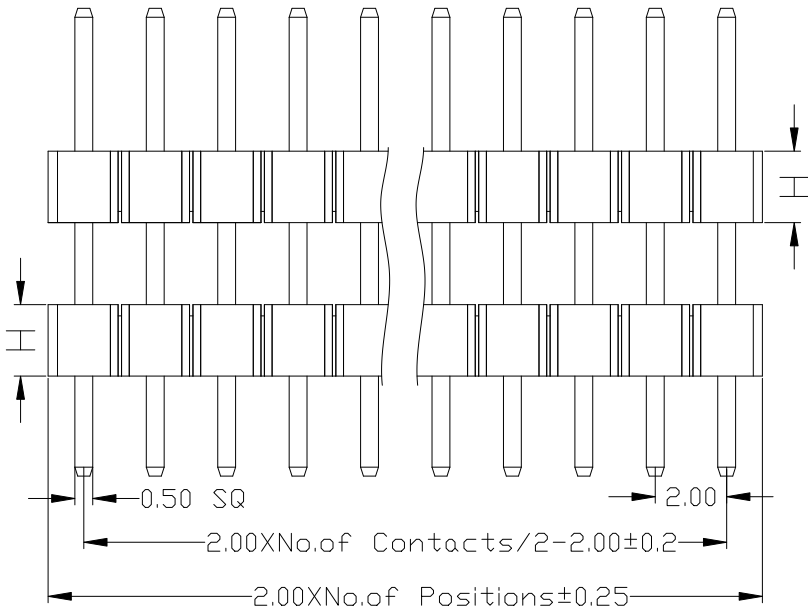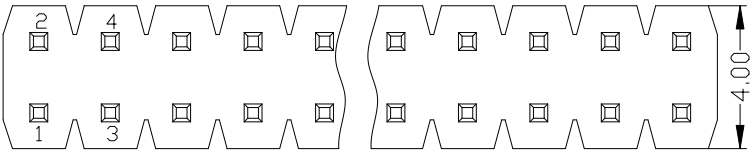

Ordering Information

P2XX-22 XX XX X S XXXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10:1.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
15:1.5mm		Semi-gold	C:PA9T		B:Tape & Reel
20:2.0mm			D:LCP		C:Tube
					D:Tube+CAP
					E:Tray

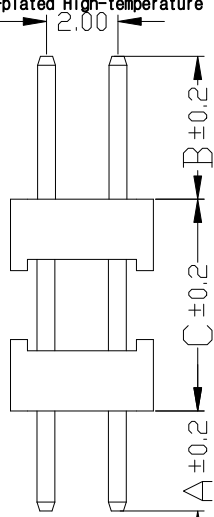

Dimension antitheses list						
ITEM	A	B	H	C		
Standard	2.8	2.8	4.0	1.0	1.5	2.0
Alternate						

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN				
				X.XXX	±0.10	SHEET	1/1	CHECK				
				Angle	±3°	PROJ.		APPROVE				
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL		Customer No.			

卢小强 PART NO. P2XX-22XXXXXSXXX2
TITLE: 2.0mm 双排针 双塑 180度 反塑胶

A

B

C

D




E

F

G

H

3

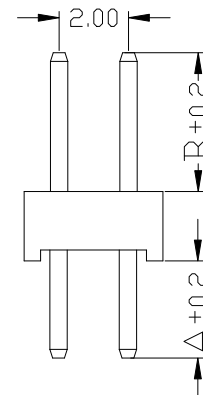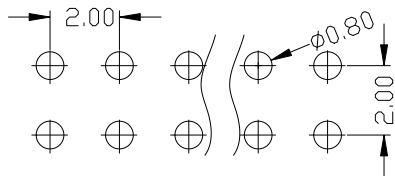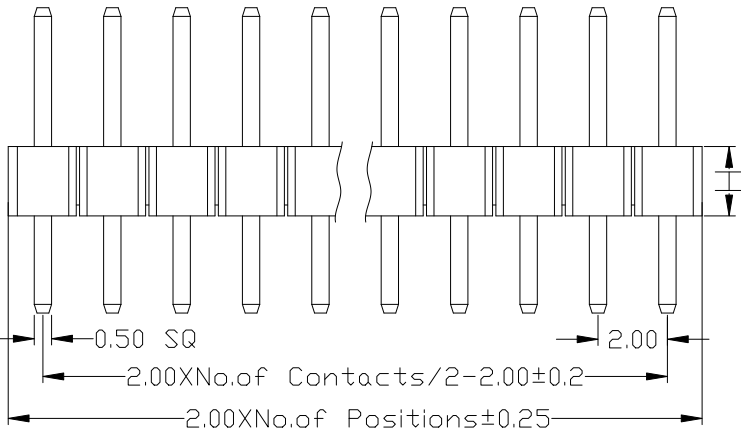

Dimension antitheses list					
ITEM	A	B	H		
Standard	2.8	4.0	1.0	1.5	2.0
Alternate					

A

B

C.

D

E

F

G



					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-12XXXXXSXXX1	
					X.XXX	±0.10							
					Angle	±3°							
							SHEET	1/1	CHECK		TITLE:	2.0mm 双排针 180度	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

上海高霖电子有限公司

卢小强

PART NO.

P2XX-12XXXXXSXXX1

TITLE:

2.0mm 双排针 180度

Customer No.

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperture Range: -40°C to+105°C

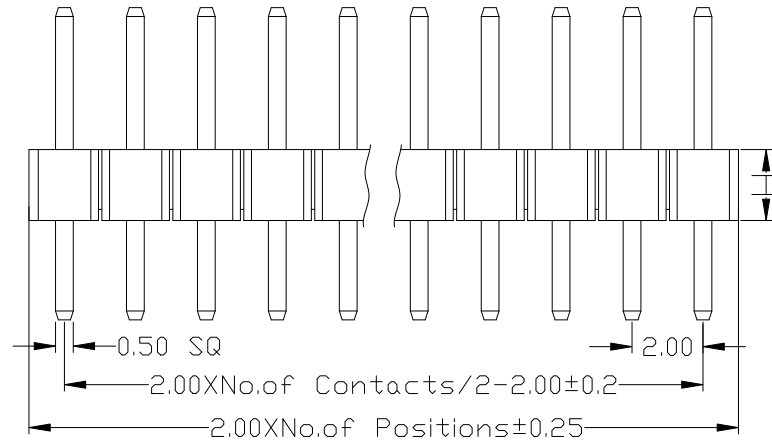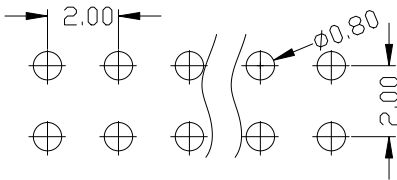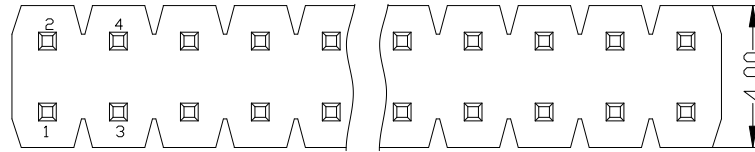

Ordering Information

P2XX-12 XX XX X S XXXA X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10:1.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
15:1.5mm		A0=0.8u"	C:PA9T		B:Tape & Reel
20:2.0mm		A1=1u"	D:LCP		C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

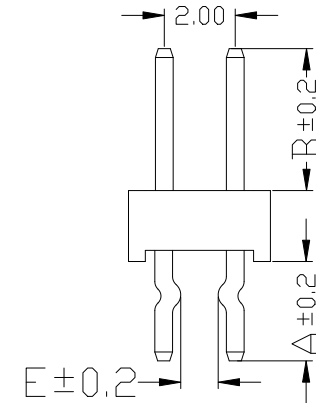

Dimension antitheses list							
ITEM	A	B	H		E		
Standard	2.8	4.0	1.0	1.5	2.0	1.6	2.0
Alternate							

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-12XXXXXSXXXX2	
						X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 双排针 180度 打K	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	Angle	PROJ.	APPROVE			Customer No.		
							±3°							
							TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

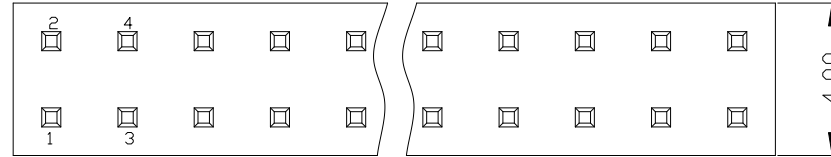

Ordering Information

P220-12 XX XX X S XX XX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
		A0=0.8u"	D:LCP		B:Tape & Reel
		A1=1u"			C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

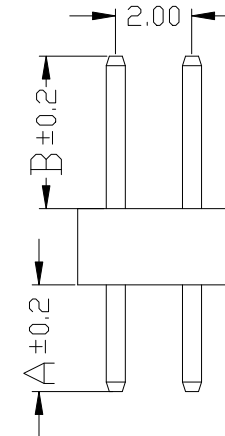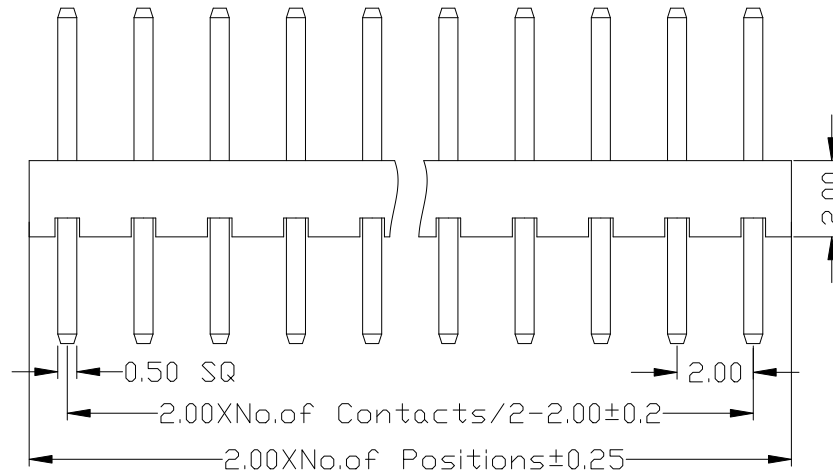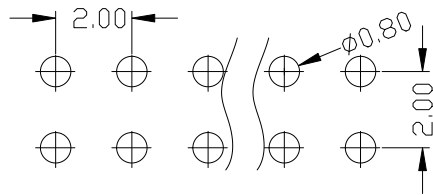

Dimension antitheses list		
ITEM	A	B
Standard	2.8	4.0
Alternate		

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P220-12XXXXXXSXXXX1	
						X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm双排针 塑高2.0 180度 不带预断	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	Angle ±3°	PROJ.	APPROVE			Customer No.		
							DIM							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

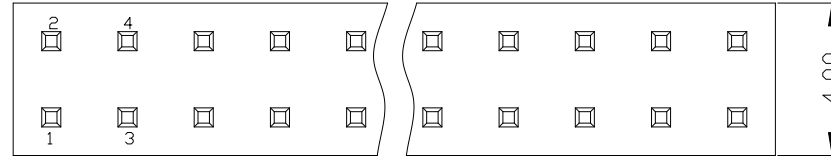

Ordering Information

P220-12 XX XX X S XX XX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
		A0=0.8u"	D:LCP		B:Tape & Reel
		A1=1u"			C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

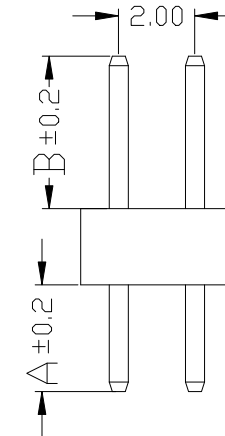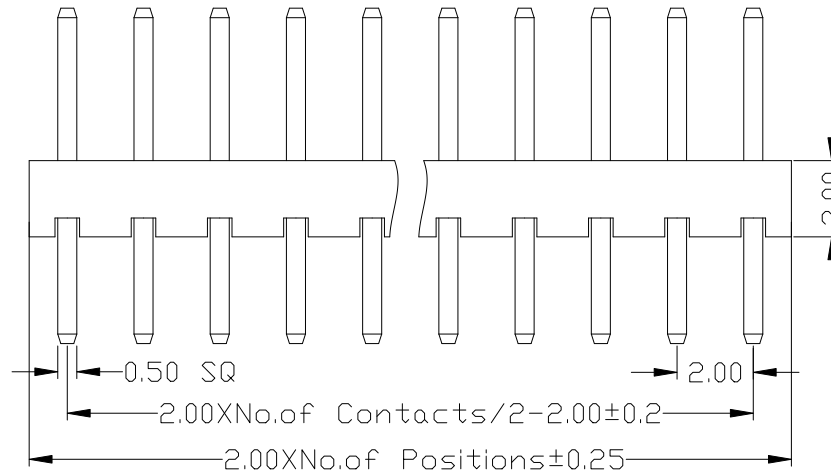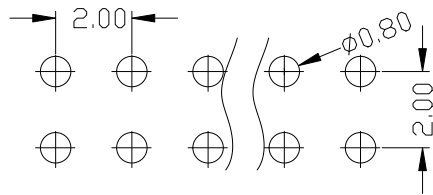

Dimension antitheses list		
ITEM	A	B
Standard	2.8	4.0
Alternate		

上海高霖电子有限公司

卢小强

PART NO.

P220-12XXXXXXSXXXX1

TITLE:

2.0mm双排针 塑高2.0 180度 不带预断

Customer No.

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	SCALE	Fit			
						X.X	UNIT	MM			
						X.XX	SIZE	A4	DESIGN		
						X.XXX	SHEET	1/1	CHECK		
						Angle	PROJ.		APPROVE		
						DIM					
						TOL					

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

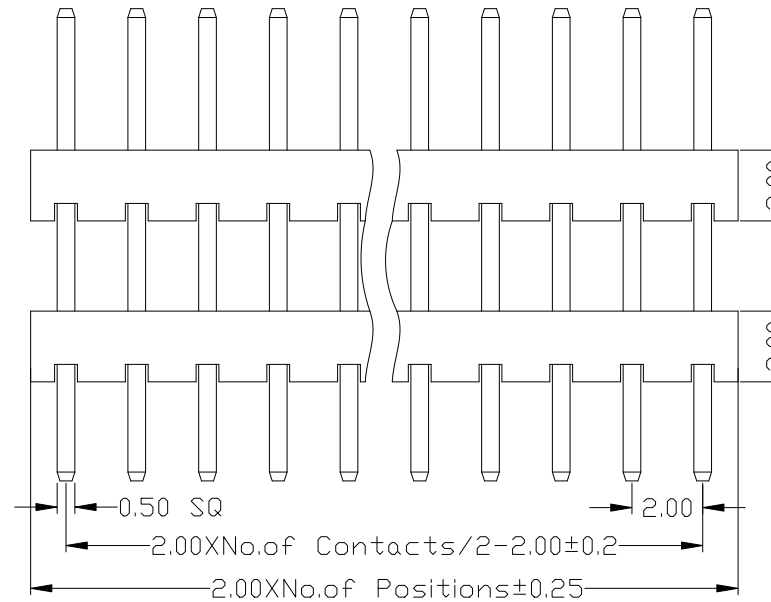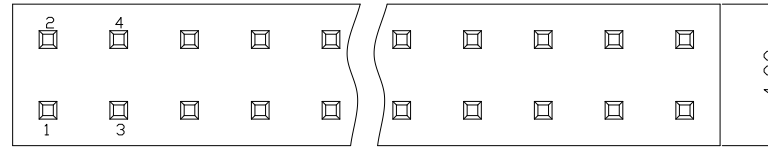

Ordering Information

P220-22 XX XX X S XX X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
		A0=0.8u"	C:PA9T		B:Tape & Reel
		A1=1u"	D:LCP		C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

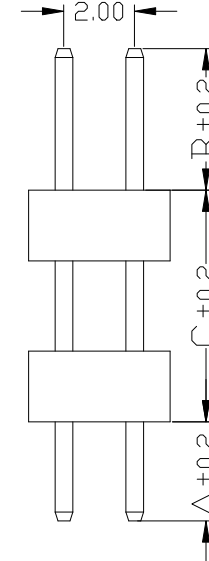

Dimension antitheses list			
ITEM	A	B	C
Standard	2.8	4.0	
Alternate			

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P220-22XXXXXSXXXX1	
						X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm双排针 塑高2.0 双塑 180度 不带预断	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		