

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rated Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

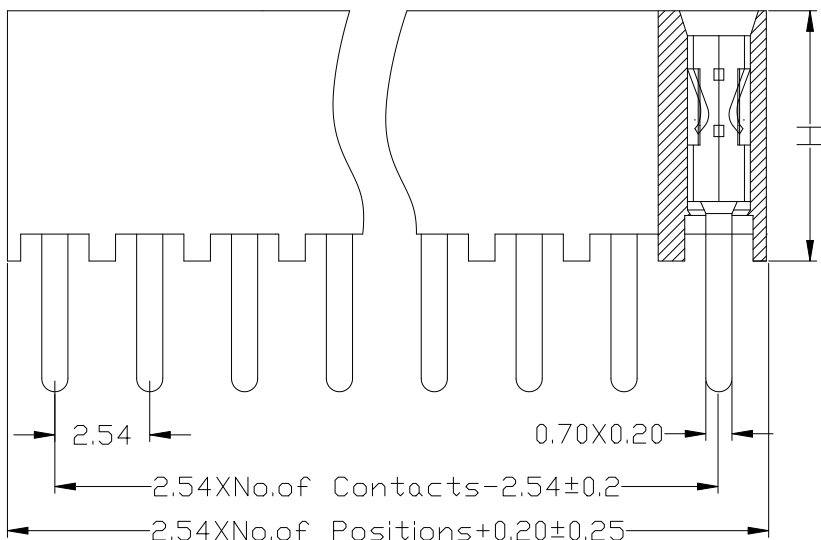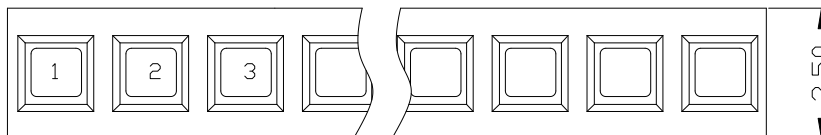

Ordering Information

F1XX-11 XX XX X SP X X

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING	TYPE1:1
60:6.0mm	1~40P	Full Of Gold	A: PBT	A: PE Bag	TYPE2:2
68:6.8mm		Semi-gold	B: PA6T	B: Tape & Reel	
		A0=0.8u"	C: PA9T	C: Tube	
		A1=1u"	D: LCP	D: Tube+CAP	
		A2=1.5u"		E: Tray	
		A3=2u"			
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

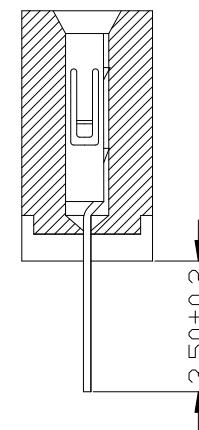

DIM"H" 6.0 6.8

				OPERATION		SCALE		Fit	上海高霖电子有限公司		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F1XX-11XXXXXSPX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 单排母 180度 上插式
				Angle	±3°	PROJ.	☯	APPROVE		Customer No.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL				