

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

F157-12 XX XX X RY AX

NO. OF PINS PER ROW 2-40P	Contact Plating		INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold		
A0=0.8u"	B0=0.8U"	A: PBT	A: PE Bag	
A1=1u"	B1=1U"	B: PA6T	B: Tape & Reel	
A2=1.5u"	B2=1.5U"	C: PA9T	C: Tube	
A3=2u"	B3=2U"	D: LCP	D: Tube+CAP	
A4=3u"	B4=3U"		E: Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

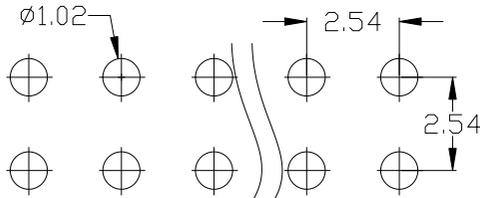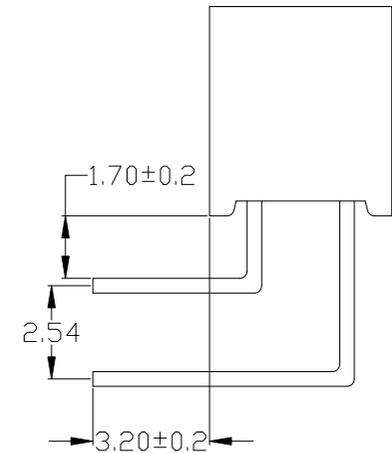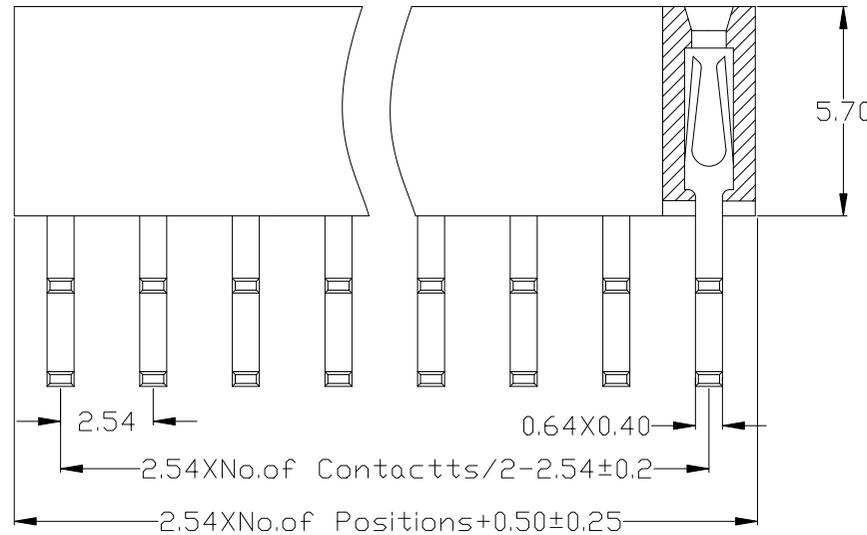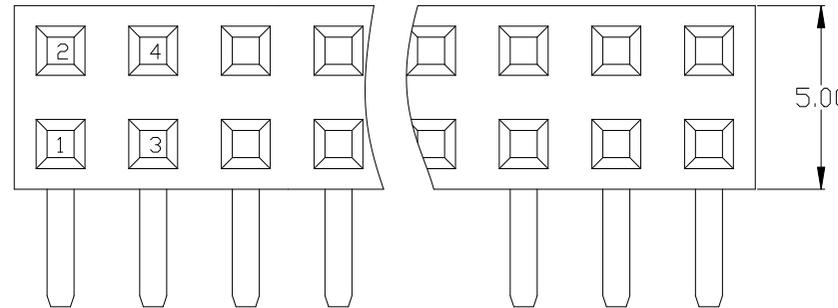

上海高霖电子有限公司

OPERATION		SCALE		Fit		上海高霖电子有限公司				
X.X	±0.25	UNIT		MM						
X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F157-12XXXXXRYX1			
X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 双排母 塑高5.7 90度 Y型			
Angle	±3°	PROJ.	☉	APPROVE		Customer No.				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL				

1 2 3 4 5 6 7 8 9 10

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

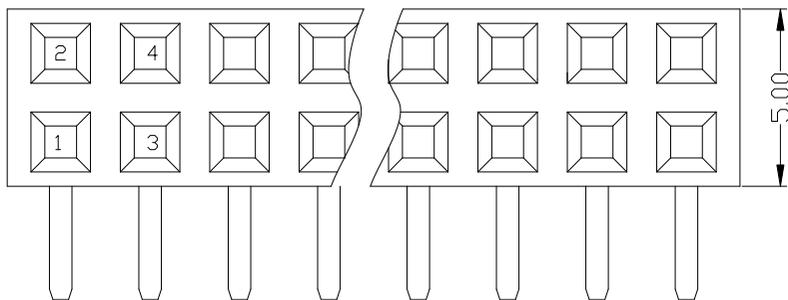

Ordering Information

F185-12 XX XX X RY AX

NO. OF PINS PER ROW 2~40P	Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	A: PBT	A: PE Bag	
A1=1u"	B1=1U"	B: PA6T	B: Tape & Reel	
A2=1.5u"	B2=1.5U"	C: PA9T	C: Tube	
A3=2u"	B3=2U"	D: LCP	D: Tube+CAP	
A4=3u"	B4=3U"		E: Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

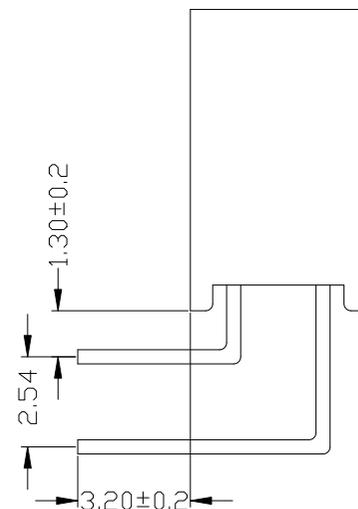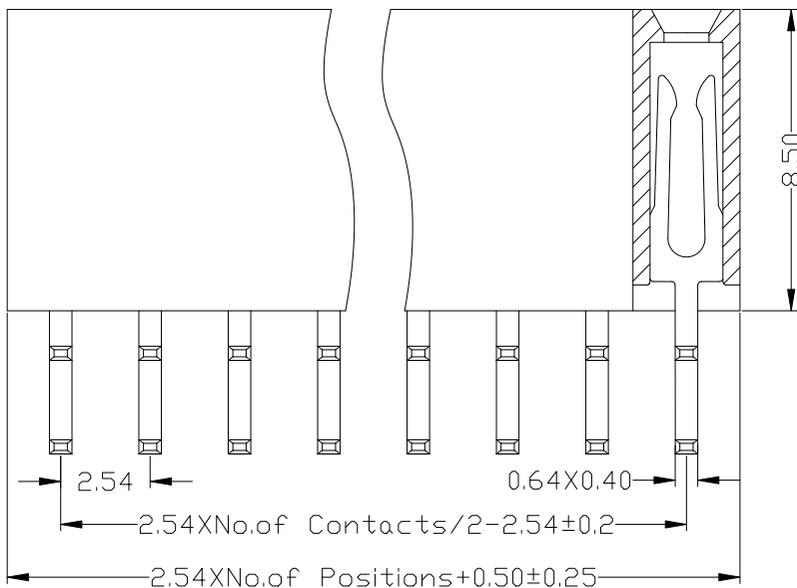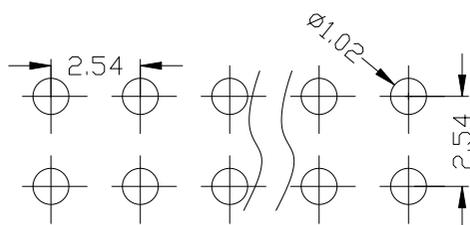

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

SIZE

A4

DESIGN

卢小强

PART NO.

F185-12XXXXXXRYX1

X.XXX ±0.10

SHEET

1/1

CHECK

TITLE:

2.54mm 双排母 塑高8.5 90度 Y型

Angle ±3°

DIM

TOL

PROJ.



APPROVE

Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
1									

上海高霖电子有限公司