



MC 系列连接器 MC Terminal Blocks


7.5mm间距 Pitch: 7.5mm		7.5mm间距 Pitch: 7.5mm		7.5mm间距 Pitch: 7.5mm	
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	
IEC/UL数据 IEC/UL Data		锁线螺钉 Locking crew	-	MC-ROX7.5HXXP-0001	2-12
额定电流 Rated current [A]	15 15	扭矩 Torque [N·m]	-	MC-ROY7.5HXXP-0001	2-12
额定电压 Rated voltage [V]	630 300	固定螺钉 Fixed screw	-	MC-POX7.5HXXP-0002	2-12
硬导线截面积 Solid [mm²][AWG]	0.2-2.5 24-12	扭矩 Torque [N·m]	-		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5 24-12	剥线长度 Strip length [mm]	9-10		
额定冲击电压 Rated impulse voltage [KV]	6 -				

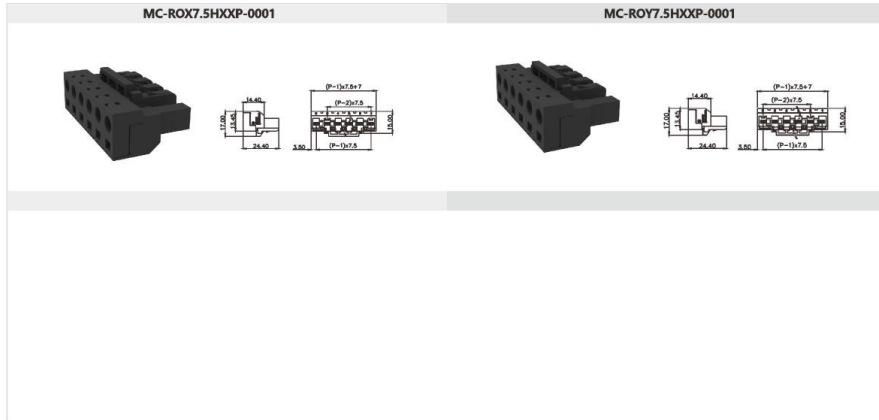

7.62mm间距 Pitch: 7.62mm		7.62mm间距 Pitch: 7.62mm		7.62mm间距 Pitch: 7.62mm	
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	
IEC/UL数据 IEC/UL Data		锁线螺钉 Locking crew	M3	MC-RB7.62HXXC-0001	2-24
额定电流 Rated current [A]	18 15	扭矩 Torque [N·m]	0.5	MC-RB7.62HXXC-K-0001	2-24
额定电压 Rated voltage [V]	630 300	固定螺钉 Fixed screw	M2.5	MC-RB7.62HXXC-I-0001	2-24
硬导线截面积 Solid [mm²][AWG]	0.2-2.5 28-12	扭矩 Torque [N·m]	0.3		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5 28-12	剥线长度 Strip length [mm]	7-8		
额定冲击电压 Rated impulse voltage [KV]	6 -				

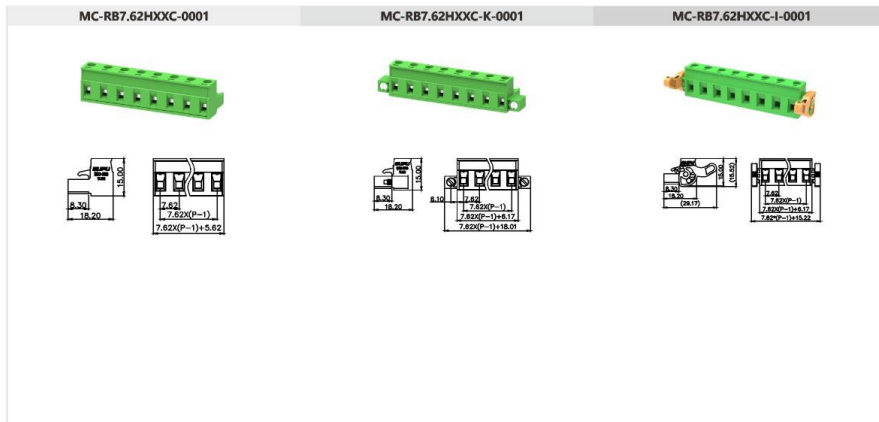

7.5mm间距 Pitch: 7.5mm		7.5mm间距 Pitch: 7.5mm		7.5mm间距 Pitch: 7.5mm	
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	
IEC/UL数据 IEC/UL Data		锁线螺钉 Locking crew	-	MC-POY7.5HXXC-0001	2-12
额定电流 Rated current [A]	15 15	扭矩 Torque [N·m]	-	MC-POY7.5HXXC-0001	2-12
额定电压 Rated voltage [V]	630 300	固定螺钉 Fixed screw	-		
硬导线截面积 Solid [mm²][AWG]	- -	扭矩 Torque [N·m]	-		
柔性导线截面积 Flexible [mm²][AWG]	- -	剥线长度 Strip length [mm]	-		
额定冲击电压 Rated impulse voltage [KV]	6 -				

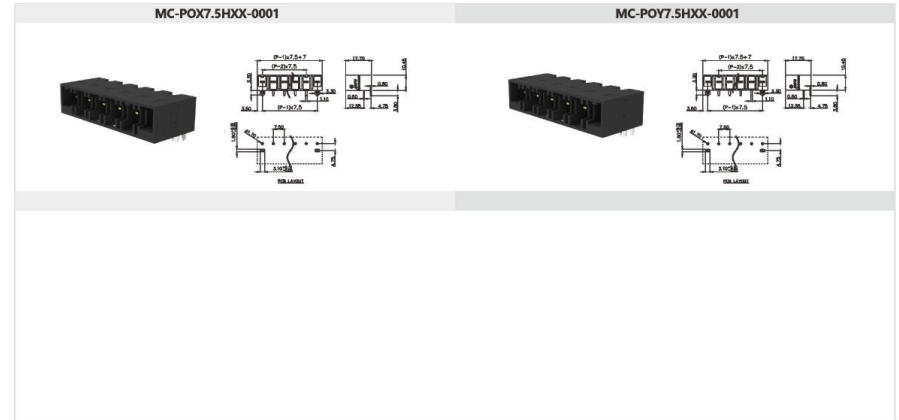

7.62mm间距 Pitch: 7.62mm		7.62mm间距 Pitch: 7.62mm		7.62mm间距 Pitch: 7.62mm	
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	
IEC/UL数据 IEC/UL Data		锁线螺钉 Locking crew	M3	MC-RE7.62VXXC-0001	2-24
额定电流 Rated current [A]	18 15	扭矩 Torque [N·m]	0.5	MC-RE7.62VXXC-K-0001	2-24
额定电压 Rated voltage [V]	630 300	固定螺钉 Fixed screw	M2.5	MC-RE7.62VXXC-I-0001	2-24
硬导线截面积 Solid [mm²][AWG]	0.2-2.5 30-12	扭矩 Torque [N·m]	0.3	MC-RE7.62VXXC-R-0001	2-24
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5 30-12	剥线长度 Strip length [mm]	7-8	MC-RE7.62VXXC-RK-0001	2-24
额定冲击电压 Rated impulse voltage [KV]	6 -				

