


多用弹簧连接器(MCS连接器) MCS connectors with spring-cage clamp


3.5mm间距针型连接器 (防错) 3.5mm Male connector with spring-cage clamp (protected against mismatching)					
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4354XX
额定电流 Rated current	[A]	10	扭矩 Torque [N·m]	-	4354XX/010
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	435013
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16	扭矩 Torque [N·m]	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16	剥线长度 Strip length [mm]	7-8
额定冲击电压 Rated impulse voltage	[KV]	2.5	-	-	-




3.5mm间距孔型连接器 (防错) 3.5mm Male connector with spring-cage clamp (protected against mismatching)					
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4355XX
额定电流 Rated current	[A]	10	扭矩 Torque [N·m]	-	4355XX/030
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	435013
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16	扭矩 Torque [N·m]	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16	剥线长度 Strip length [mm]	7-8
额定冲击电压 Rated impulse voltage	[KV]	2.5	-	-	-

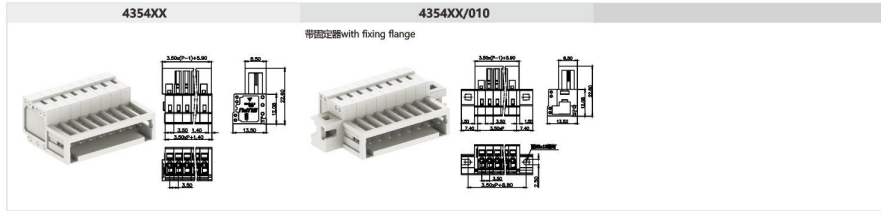


3.81mm间距孔型连接器 3.81mm Female connectors					
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4381XX
额定电流 Rated current	[A]	10	扭矩 Torque [N·m]	-	4381XX/050
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	435013
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16	扭矩 Torque [N·m]	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16	剥线长度 Strip length [mm]	7-8
额定冲击电压 Rated impulse voltage	[KV]	2.5	-	-	-

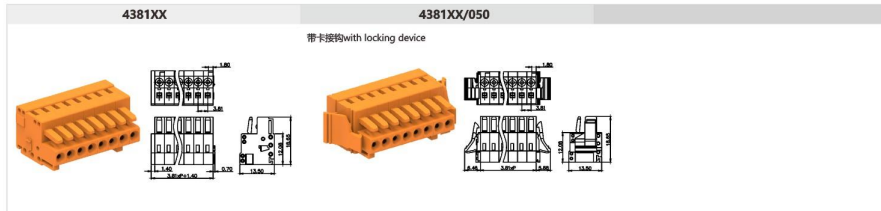

3.81mm间距焊针插座 3.81mm Solder pin					
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4382XX
额定电流 Rated current	[A]	10	扭矩 Torque [N·m]	-	4383XX
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	435013
硬导线截面积 Solid	[mm²][AWG]	-	-	扭矩 Torque [N·m]	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-	剥线长度 Strip length [mm]	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-	-	-

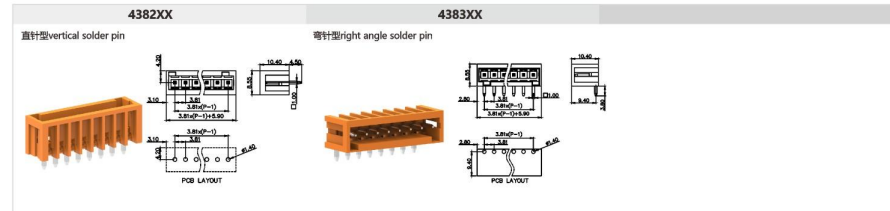

3.81mm间距针型连接器 3.81mm Male connector with spring-cage clamp					
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4384XX
额定电流 Rated current	[A]	10	扭矩 Torque [N·m]	-	4384XX/010
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	435013
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16	扭矩 Torque [N·m]	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16	剥线长度 Strip length [mm]	7-8
额定冲击电压 Rated impulse voltage	[KV]	2.5	-	-	-

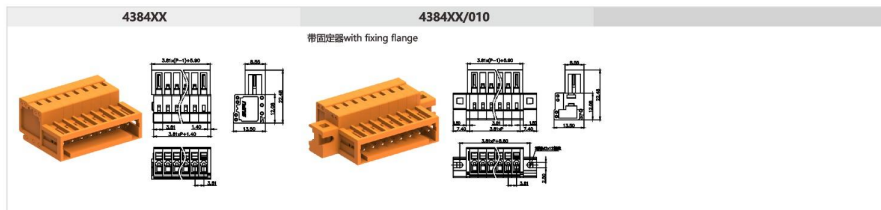

5.0mm间距孔型连接器 5.0mm Female connectors					
产品信息Product Information		产品信息Product Information		订货号/通道数 Order / Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4501XX
额定电流 Rated current	[A]	12	扭矩 Torque [N·m]	-	4501XX/010
额定电压 Rated voltage	[V]	320	固定螺钉 Fixed screw	-	4501XX/030
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12	扭矩 Torque [N·m]	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12	剥线长度 Strip length [mm]	8-9
额定冲击电压 Rated impulse voltage	[KV]	4.0	-	-	-

