



5.08mm间距穿墙式连接器 5.08mm Through-wall connector

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data				IEC				UL			
额定电流 Rated current	[A]	12	15	锁线螺钉 Locking crew	-	45846X	-	2-24	45897X		
额定电压 Rated voltage	[V]	320	300	扭矩 Torque	[N·m]	45846X/010	-	2-24	45850X		
破导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12	固定螺钉 Fixed screw	-	45843X	-	2-24	450021		
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12	扭矩 Torque	[N·m]	45843X/010	-	2-24	450023		
额定冲击电压 Rated impulse voltage	[KV]	4.0	-	剥线长度 Strip length	[mm]	-	-	-	450014		

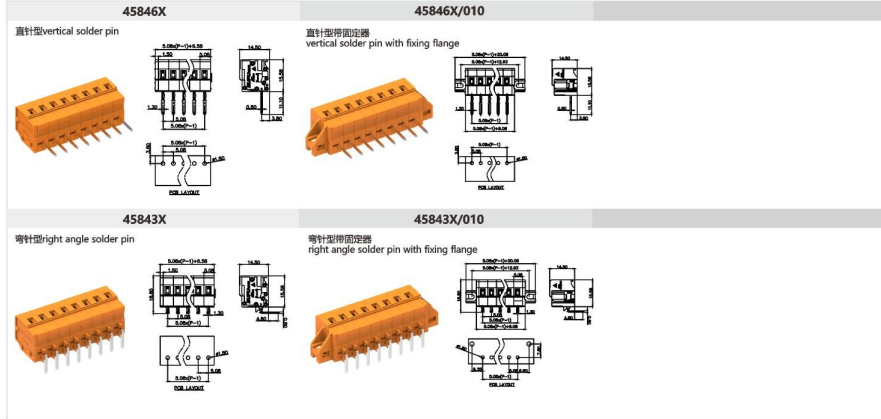


7.5mm间距孔型连接器 7.5mm Female connectors

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data				IEC				UL			
额定电流 Rated current	[A]	16	15	锁线螺钉 Locking crew	-	4751XX	-	2-24	45097X		
额定电压 Rated voltage	[V]	500	300	扭矩 Torque	[N·m]	4751XX/010	-	2-24	4755XX		
破导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14	固定螺钉 Fixed screw	-	4751XX/030	-	2-24	450021		
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14	扭矩 Torque	[N·m]	4751XX/050	-	2-24	450023		
额定冲击电压 Rated impulse voltage	[KV]	6.0	-	剥线长度 Strip length	[mm]	-	-	-	450014		

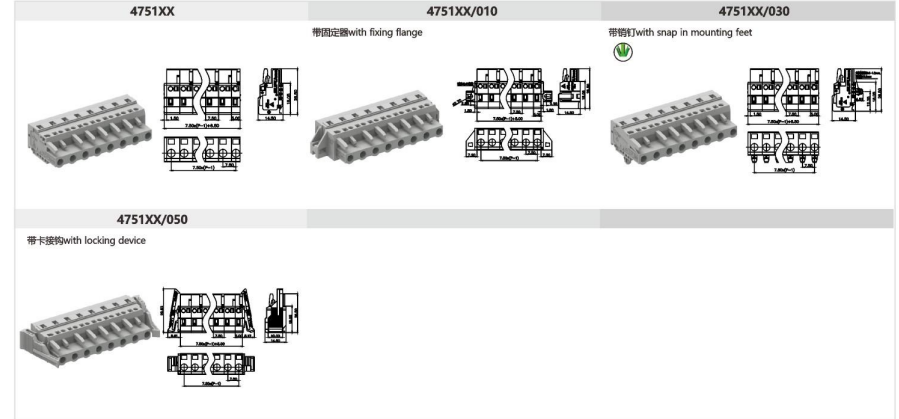

7.5mm间距焊针插座 7.5mm Solder pin

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		订货号/通道数 Order /Poles No.	
IEC/UL数据 IEC/UL Data				IEC				UL			
额定电流 Rated current	[A]	12	15	锁线螺钉 Locking crew	-	4752XX	-	2-24	4752XX-06D		
额定电压 Rated voltage	[V]	500	300	扭矩 Torque	[N·m]	4752XX-03D	-	2-24	4753XX		
破导线截面积 Solid	[mm²][AWG]	-	-	固定螺钉 Fixed screw	-	4752XX-04D	-	2-24	4753XX-03D		
柔性导线截面积 Flexible	[mm²][AWG]	-	-	扭矩 Torque	[N·m]	4752XX-05D	-	2-24	4753XX-04D		
额定冲击电压 Rated impulse voltage	[KV]	6.0	-	剥线长度 Strip length	[mm]	-	-	-	-		

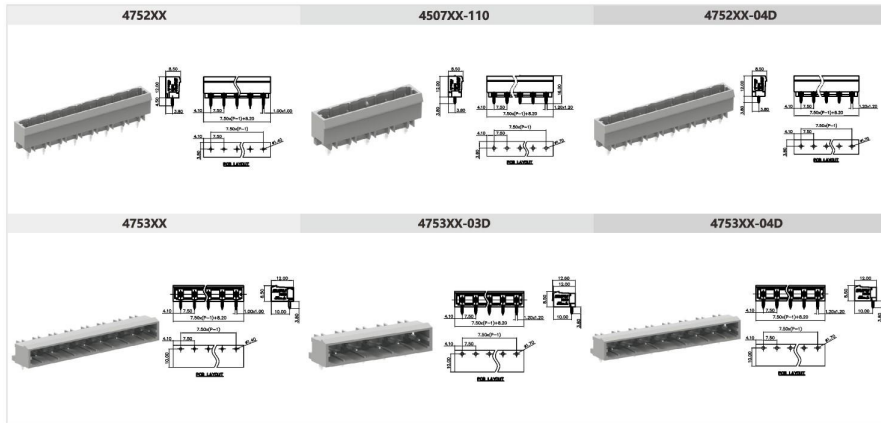

7.5mm间距焊针插座 7.5mm Solder pin

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data				IEC				UL			
额定电流 Rated current	[A]	12	15	锁线螺钉 Locking crew	-	4752XX	-	2-24	4752XX-06D		
额定电压 Rated voltage	[V]	500	300	扭矩 Torque	[N·m]	4752XX-03D	-	2-24	4753XX		
破导线截面积 Solid	[mm²][AWG]	-	-	固定螺钉 Fixed screw	-	4752XX-04D	-	2-24	4753XX-03D		
柔性导线截面积 Flexible	[mm²][AWG]	-	-	扭矩 Torque	[N·m]	4752XX-05D	-	2-24	4753XX-04D		
额定冲击电压 Rated impulse voltage	[KV]	6.0	-	剥线长度 Strip length	[mm]	-	-	-	-		

