



多用弹簧连接器(MCS连接器) MCS connectors with spring-cage clamp


7.5mm间距型连接器 7.5mm Male connector with spring-cage clamp									
产品信息Product Information			产品信息Product Information			订货号/通道数 Order / Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4754XX	2-24	45097X		
额定电流 Rated current	[A]	16	扭矩 Torque [N·m]	-	4754XX/010	2-24	4755XX		
额定电压 Rated voltage	[V]	500	固定螺钉 Fixed screw	-	4754XX/030	2-24	450021		
硬导线截面积 Solid [mm²][AWG]	0.2-2.5	28-14	扭矩 Torque [N·m]	-	4754XX/060	2-24	450023		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5	28-14	剥线长度 Strip length [mm]	8-9			450014		
额定冲击电压 Rated impulse voltage [KV]	6.0	-							

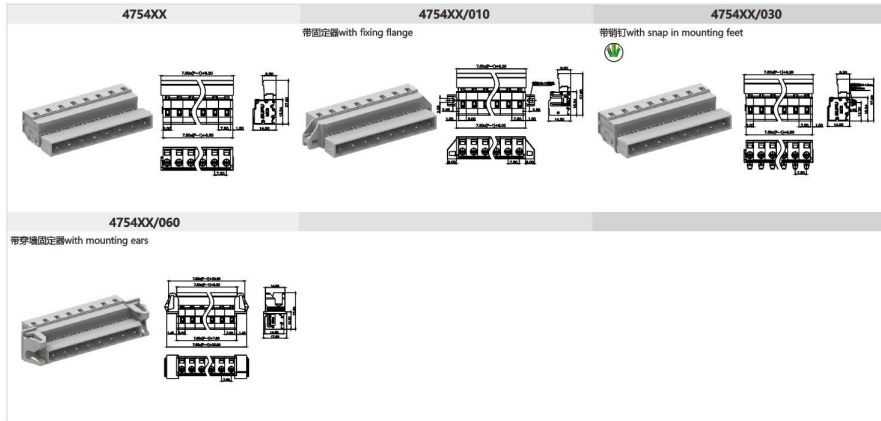

7.5mm间距穿墙式连接器 5mm Through-wall connector									
产品信息Product Information			产品信息Product Information			订货号/通道数 Order / Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	47546X	2-24	45097X		
额定电流 Rated current	[A]	16	扭矩 Torque [N·m]	-	47546X/010	2-24	4755XX		
额定电压 Rated voltage	[V]	500	固定螺钉 Fixed screw	-	47543X	2-24	450021		
硬导线截面积 Solid [mm²][AWG]	0.2-2.5	28-14	扭矩 Torque [N·m]	-	47543X/010	2-24	450023		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5	28-14	剥线长度 Strip length [mm]	8-9			450014		
额定冲击电压 Rated impulse voltage [KV]	6.0	-							

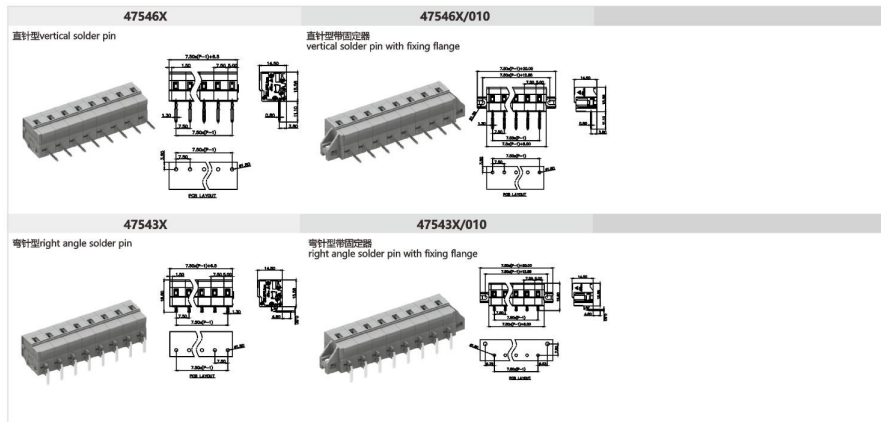

7.5mm间距孔型插头带焊针 7.5mm Female connector with spring-cage clamp with solder pin									
产品信息Product Information			产品信息Product Information			订货号/通道数 Order / Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	47525X	2-24			
额定电流 Rated current	[A]	16	扭矩 Torque [N·m]	-	47535X	2-24			
额定电压 Rated voltage	[V]	500	固定螺钉 Fixed screw	-					
硬导线截面积 Solid [mm²][AWG]	-	-	扭矩 Torque [N·m]	-					
柔性导线截面积 Flexible [mm²][AWG]	-	-	剥线长度 Strip length [mm]	-					
额定冲击电压 Rated impulse voltage [KV]	6.0	-							

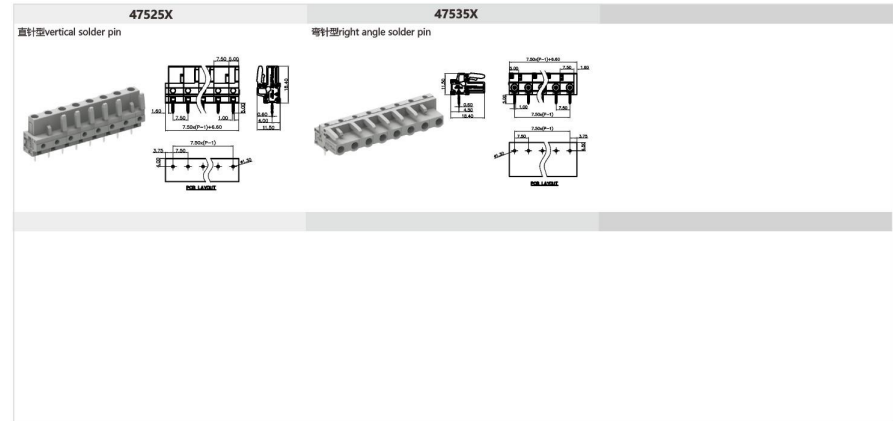

7.5mm间距孔型连接器(防错) 7.5mm Female connectors(protected against mismatching)									
产品信息Product Information			产品信息Product Information			订货号/通道数 Order / Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	47560X	2-24	45097X		
额定电流 Rated current	[A]	16	扭矩 Torque [N·m]	-	47560X/010	2-24	4755XX		
额定电压 Rated voltage	[V]	500	固定螺钉 Fixed screw	-	47560X/030	2-24	450021		
硬导线截面积 Solid [mm²][AWG]	0.2-2.5	28-14	扭矩 Torque [N·m]	-	47560X/050	2-24	450023		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5	28-14	剥线长度 Strip length [mm]	8-9			450014		
额定冲击电压 Rated impulse voltage [KV]	6.0	-							

