


多用弹簧连接器(MCS连接器) MCS connectors with spring-cage clamp


7.5mm间距焊针插座(防错) 7.5mm Solder pin(protected against mismatching)

| 产品信息Product Information      |            |         | 产品信息Product Information |       |            | 订货号/通道数 Order /Poles No. |            | 订货号/通道数 Order /Poles No. |  |
|------------------------------|------------|---------|-------------------------|-------|------------|--------------------------|------------|--------------------------|--|
| IEC/UL数据 IEC/UL Data         | IEC        | UL      | 锁线螺钉 Locking crew       | -     | 4757XX     | 2-24                     | 4757XX-04D | 2-24                     |  |
| 额定电流 Rated current           | [A]        | 12 15   | 扭矩 Torque               | [N·m] | 4757XX-00D | 2-24                     | 4757XX-05D | 2-24                     |  |
| 额定电压 Rated voltage           | [V]        | 500 300 | 固定螺钉 Fixed screw        | -     | 4757XX-02D | 2-24                     | 4758XX-06D | 2-24                     |  |
| 硬导线截面积 Solid                 | [mm²][AWG] | - -     | 扭矩 Torque               | [N·m] | 4757XX-03D | 2-24                     |            |                          |  |
| 柔性导线截面积 Flexible             | [mm²][AWG] | - -     | 剥线长度 Strip length       | [mm]  |            |                          |            |                          |  |
| 额定冲击电压 Rated impulse voltage | [KV]       | 6.0 -   |                         |       |            |                          |            |                          |  |

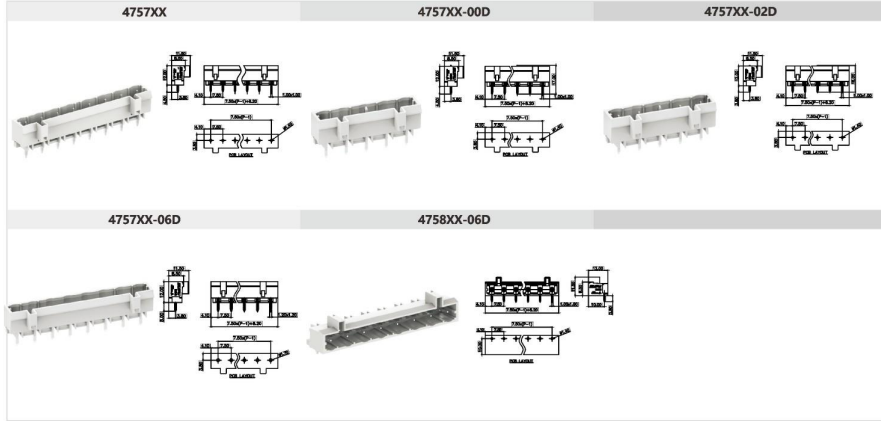


7.5mm间距针型连接器(防错) 7.5mm Male connector with spring-cage clamp(protected against mismatching)

| 产品信息Product Information      |            |               | 产品信息Product Information |       |            | 订货号/通道数 Order /Poles No. |        | 附件Accessory |  |
|------------------------------|------------|---------------|-------------------------|-------|------------|--------------------------|--------|-------------|--|
| IEC/UL数据 IEC/UL Data         | IEC        | UL            | 锁线螺钉 Locking crew       | -     | 4759XX     | 2-24                     | 4509TX |             |  |
| 额定电流 Rated current           | [A]        | 16 15         | 扭矩 Torque               | [N·m] | 4759XX/010 | 2-24                     | 4755XX |             |  |
| 额定电压 Rated voltage           | [V]        | 500 300       | 固定螺钉 Fixed screw        | -     | 4759XX/030 | 2-24                     | 450021 |             |  |
| 硬导线截面积 Solid                 | [mm²][AWG] | 0.2-2.5 28-14 | 扭矩 Torque               | [N·m] | 4759XX/060 | 2-24                     | 450023 |             |  |
| 柔性导线截面积 Flexible             | [mm²][AWG] | 0.2-2.5 28-14 | 剥线长度 Strip length       | [mm]  |            |                          | 450014 |             |  |
| 额定冲击电压 Rated impulse voltage | [KV]       | 6.0 -         |                         |       |            |                          |        |             |  |

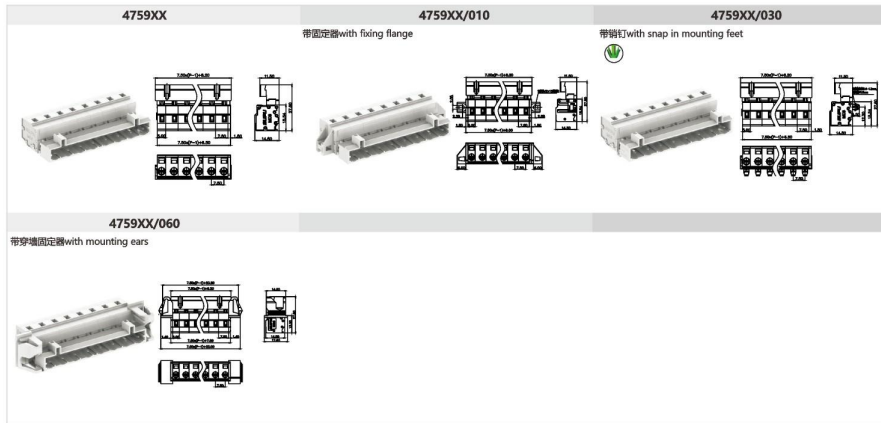

7.5mm间距焊针插座(防错) 7.5mm Solder pin(protected against mismatching)

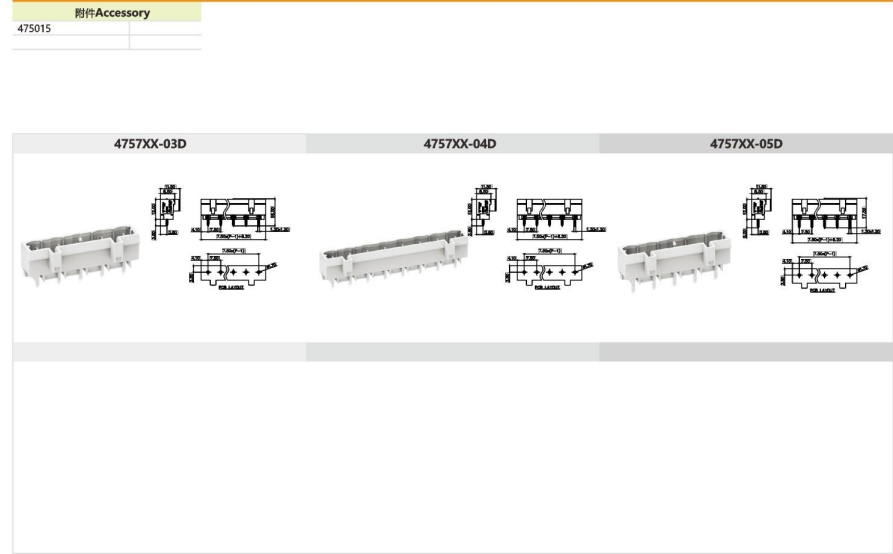

7.5mm间距孔型插头带焊针(防错) 7.5mm Female connector with spring-cage clamp with solder pin(protected against mismatching)

| 产品信息Product Information      |            |         | 产品信息Product Information |       |        | 订货号/通道数 Order /Poles No. |  | 附件Accessory |  |
|------------------------------|------------|---------|-------------------------|-------|--------|--------------------------|--|-------------|--|
| IEC/UL数据 IEC/UL Data         | IEC        | UL      | 锁线螺钉 Locking crew       | -     | 4757SX | 2-24                     |  |             |  |
| 额定电流 Rated current           | [A]        | 16 15   | 扭矩 Torque               | [N·m] | 4758SX | 2-24                     |  |             |  |
| 额定电压 Rated voltage           | [V]        | 500 300 | 固定螺钉 Fixed screw        | -     |        |                          |  |             |  |
| 硬导线截面积 Solid                 | [mm²][AWG] | - -     | 扭矩 Torque               | [N·m] |        |                          |  |             |  |
| 柔性导线截面积 Flexible             | [mm²][AWG] | - -     | 剥线长度 Strip length       | [mm]  |        |                          |  |             |  |
| 额定冲击电压 Rated impulse voltage | [KV]       | 6.0 -   |                         |       |        |                          |  |             |  |

