


多用途弹簧连接器(MCS连接器) MCS connectors with spring-cage clamp


7.62mm间距孔型连接器 7.62mm Female connectors

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL		锁线螺钉 Locking crew	[N·m]	-	4781XX	2-24	45897X		
额定电流 Rated current	[A]	16	15	扭矩 Torque	[N·m]	-	4781XX/010	2-24	450021		
额定电压 Rated voltage	[V]	500	300	固定螺钉 Fixed screw	[N·m]	-	4781XX/030	2-24	450023		
硬导线截面积 Solid [mm²][AWG]	0.2-2.5	28-14		扭矩 Torque	[N·m]	-	4781XX/050	2-24	450014		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5	28-14		剥线长度 Strip length	[mm]	8-9					
额定冲击电压 Rated impulse voltage	[KV]	6.0	-								

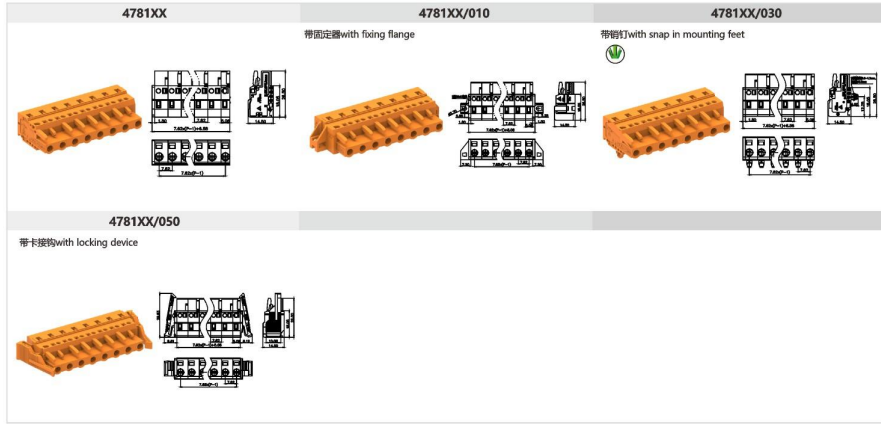


7.62mm间距针型连接器 7.62mm Male connector with spring-cage clamp

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL		锁线螺钉 Locking crew	[N·m]	-	4784XX	2-24	45897X		
额定电流 Rated current	[A]	16	15	扭矩 Torque	[N·m]	-	4784XX/010	2-24	450021		
额定电压 Rated voltage	[V]	500	300	固定螺钉 Fixed screw	[N·m]	-	4784XX/030	2-24	450023		
硬导线截面积 Solid [mm²][AWG]	0.2-2.5	28-14		扭矩 Torque	[N·m]	-	4784XX/060	2-24	450014		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5	28-14		剥线长度 Strip length	[mm]	8-9					
额定冲击电压 Rated impulse voltage	[KV]	6.0	-								

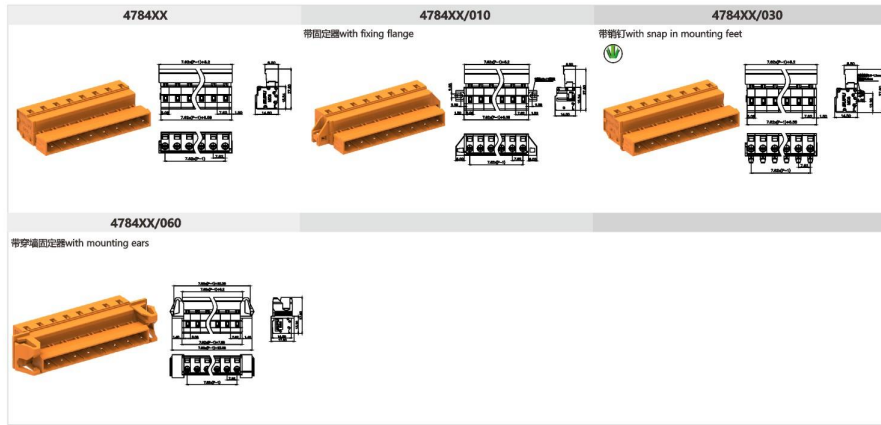

7.62mm间距焊针插座 7.62mm Solder pin

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL		锁线螺钉 Locking crew	[N·m]	-	4782XX	2-24	475015		
额定电流 Rated current	[A]	16	15	扭矩 Torque	[N·m]	-	4782XX-04D	2-24			
额定电压 Rated voltage	[V]	500	300	固定螺钉 Fixed screw	[N·m]	-	4782XX-06D	2-24			
硬导线截面积 Solid [mm²][AWG]	-	28-14		扭矩 Torque	[N·m]	-	4783XX	2-24			
柔性导线截面积 Flexible [mm²][AWG]	-	28-14		剥线长度 Strip length	[mm]	-	4783XX-04D	2-24			
额定冲击电压 Rated impulse voltage	[KV]	6.0	-								

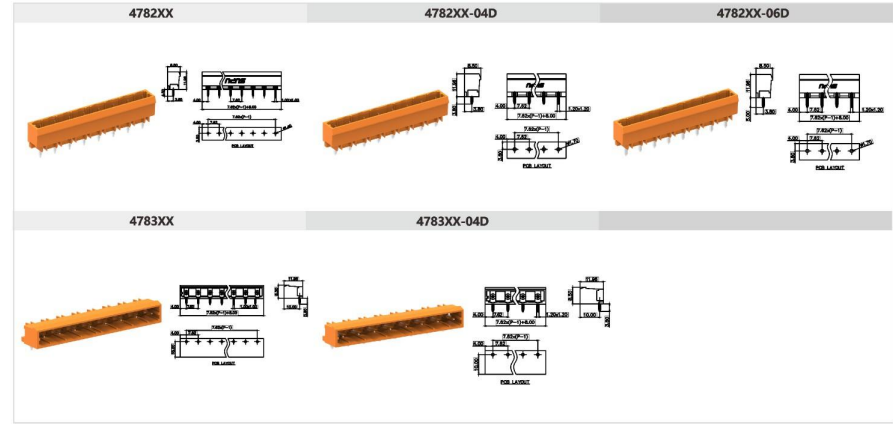

7.62mm间距穿墙式连接器 7.62mm Through-wall connector

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data	IEC	UL		锁线螺钉 Locking crew	[N·m]	-	47846X	2-24	45897X		
额定电流 Rated current	[A]	16	15	扭矩 Torque	[N·m]	-	47846X/010	2-24	450021		
额定电压 Rated voltage	[V]	500	300	固定螺钉 Fixed screw	[N·m]	-	47843X	2-24	450023		
硬导线截面积 Solid [mm²][AWG]	0.2-2.5	28-14		扭矩 Torque	[N·m]	-	47843X/010	2-24	450014		
柔性导线截面积 Flexible [mm²][AWG]	0.2-2.5	28-14		剥线长度 Strip length	[mm]	8-9					
额定冲击电压 Rated impulse voltage	[KV]	6.0	-								

