

B 7.62D


接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度

Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

300V, 10A
22~14 AWG
M3, 12Kgf c m
PBT, UL94 V0
AC2000, 1Min.
1000MΩ, DC500V
-40℃~+130℃



B 7.62D-HR



How to Order

外壳形状 Insulator Style
B7.62D
引脚形状 Terminal Style
螺钉 Screw
位数 Positions
2 to 25
特殊选项 Options
Each position with 2 poles

B 7.62DCF-HRE

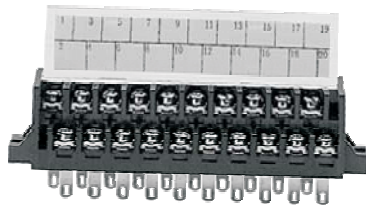

外壳形状 Insulator Style

-/C: 无/有上盖

Without/With Cover

-/F: 无/有端部安装耳

Without/With Mount end

引脚形状 Terminal Style

见左图

See left drawing

螺钉 Screw

空白: 标准配置

Blank: Std. Screw

B 7.62DL-HR

