



B 7. 62DP


接线端子参数

<u>额定电参数</u>	<u>Rating</u>	<u>300V, 10A</u>
<u>压线范围</u>	<u>Wire Range</u>	<u>22~14 AWG</u>
<u>螺钉力矩</u>	<u>Screw/Torque Rating</u>	<u>M3, 8Kgf c m</u>
<u>外壳</u>	<u>Insulator Body</u>	<u>PBT, UL94 V0</u>
<u>工频耐电压</u>	<u>Insulation withstand Voltage</u>	<u>AC2000, 1Min.</u>
<u>绝缘抵抗</u>	<u>Insulation Resistance</u>	<u>1000MΩ, DC500V</u>
<u>使用温度</u>	<u>Operating Temperature</u>	<u>-40℃~+130℃</u>

B 7.62 D P C - H



How to Order

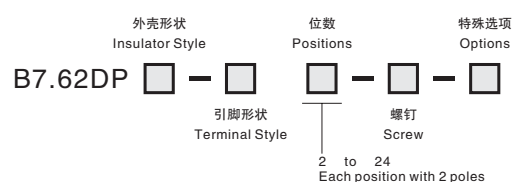

外壳形状
Insulator Style

-/C: 无/有上盖	Without/With Cover
-/F: 无/有端部安装耳	Without/With Mount end
B: 仅是插头	Only for body
S: 仅是插座	Only for socket

引脚形状
Terminal Style

见左图 See left drawing

螺钉
Screw

Blank: 标准配置 Blank: Std. Screw