

B 8.255



接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度

Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

300V, 20A
22~12 AWG
M3, 12Kgf c m
PBT, UL94 V0
AC2000, 1Min.
1000MΩ, DC500V
-40℃~+130℃

B 8.255-H


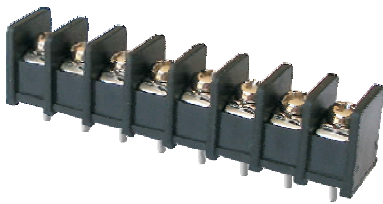


How to Order

B8.255

外壳形状 Insulator Style	位数 Positions	特殊选项 Options
☐	☐	☐
引脚形状 Terminal Style	螺钉 Screw	
	2 to 32 2 to 28 on mount end	

B 8.255F-HE

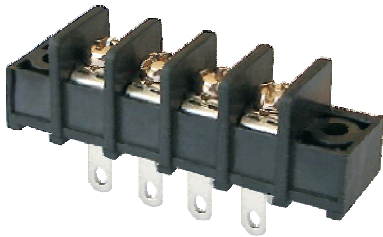

外壳形状
Insulator Style



-/C: 无/有上盖

Without/With Cover

-/F: 无/有端部安装耳

Without/With Mount end

B 8.255-HR

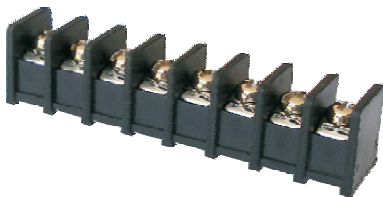

引脚形状
Terminal Style

见左图

See left drawing

螺钉
Screw

空白: 标准配置

Blank: Std. Screw

B 8.255-VL

