


间距 8.255 mm
Pitch .325"


B 8.255T
接线端子参数

额定电参数	Rating	300V, 20A
压线范围	Wire Range	22~12 AWG
螺钉力矩	Screw/Torque Rating	M3, 12Kgf c m
外壳	Insulator Body	PBT, UL94 V0
工频耐电压	Insulation withstand Voltage	AC2000, 1Min.
绝缘抵抗	Insulation Resistance	1000MΩ, DC500V
使用温度	Operating Temperature	-40°C~+130°C



B 8.255T-HR



How to Order

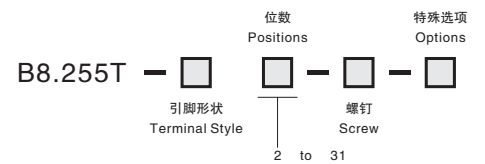

B 8.255T-VB

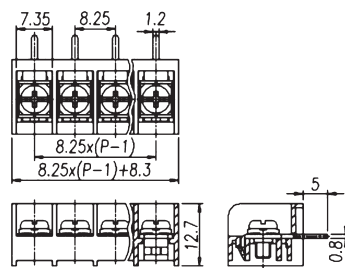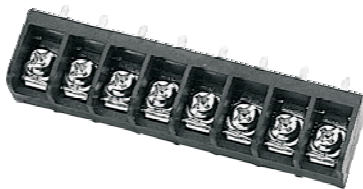

引脚形状
Terminal Style

见左图

See left drawing

螺钉
Screw

空白: 标准配置

Blank: Std. Screw