



B 9.525DP
接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度


Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

300V, 10A
18~14 AWG
M3.5, 12Kgf c m
PBT, UL94 V0
AC2000, 1Min.
1000MΩ, DC500V
-40℃~+130℃

B 9.525DP-HR

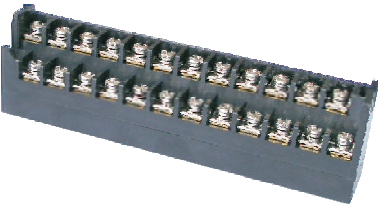

How to Order

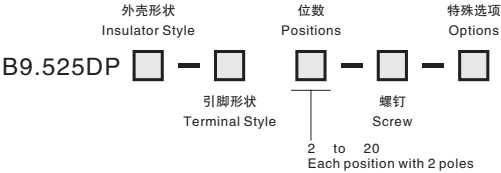

B 9.525DPB-HR

外壳形状
Insulator Style
-/C: 无/有上盖 Without/With Cover
-/F: 无/有端部安装耳 Without/With Mount end
B: 仅是插头 Only for body
S: 仅是插座 Only for socket

引脚形状
Terminal Style
见左图 See left drawing

B 9.525DPS-HR

螺钉
Screw
空白: 标准配置 Blank: Std. Screw