

B 9.525



接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度

Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

300V, 20A
22~12 AWG
M3.5, 12Kgf c m
PBT, UL94 V0
AC2000, 1Min.
1000MΩ, DC500V
-40℃~+130℃



B 9.525 C-H



How to Order

外壳形状 Insulator Style
B9.525
引脚形状 Terminal Style
位数 Positions
2 to 28
2 to 26 on mount end
特殊选项 Options
螺钉 Screw

B 9.525 FC-H

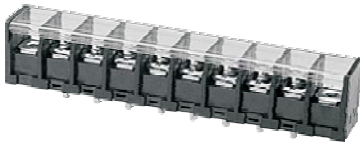

外壳形状 Insulator Style



-/C: 无/有上盖

Without/With Cover

-/F: 无/有端部安装耳

Without/With Mount end

B 9.525 FC-HE



引脚形状 Terminal Style

见左图

See left drawing

螺钉 Screw

空白: 标准配置

Blank: Std. Screw

B 9.525 C-VL

