

间距 9.525 mm
Pitch .375"

栅栏式接线端子
Barrier Terminal Blocks

B 9.525T

接线端子参数

额定电参数

压线范围

螺钉力矩

外壳

工频耐电压

绝缘抵抗

使用温度

Rating

Wire Range

Screw/Torque Rating

Insulator Body

Insulation withstand Voltage

Insulation Resistance

Operating Temperature

300V, 25A

22~12 AWG

M3.5, 12Kgf c m



PBT, UL94 V0

AC2000, 1Min.


1000MΩ, DC500V

-40℃~+130℃



B 9.525T-HR

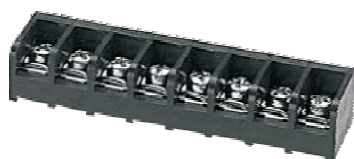

How to Order

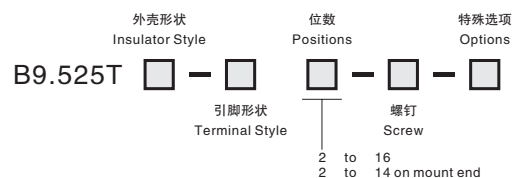

B 9.525T-HRI

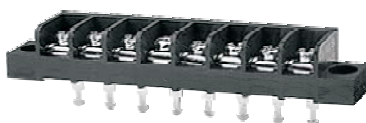

外壳形状
Insulator Style



-/C: 无/有上盖

Without/With Cover

-/F: 无/有端部安装耳

Without/With Mount end

B 9.525T-VB

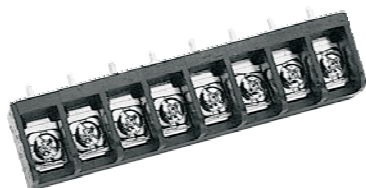

引脚形状
Terminal Style

见左图

See left drawing

螺钉
Screw

空白: 标准配置

Blank: Std. Screw

B 9.525T-VBI

