




C6502 SERIES

6.00-5.00mm Pitch Wire to Wire Connector

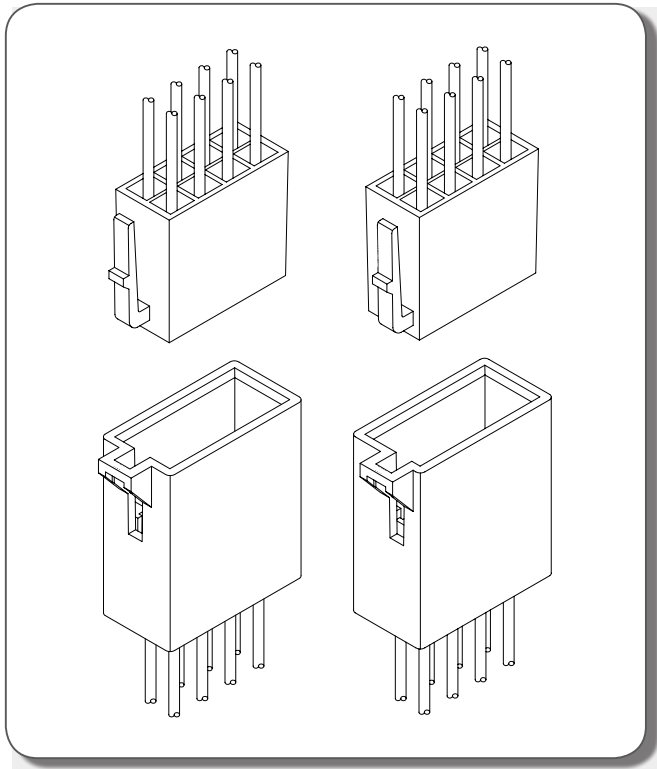

Specifications

Current Rating: 5A~7A AC,DC(Per Pin)

Voltage Rating: 250V AC,DC(Per Pin)

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000Ω Min.

Withstanding Voltage: 1500V AC/minute


A

B

C

F

Assembly Layout

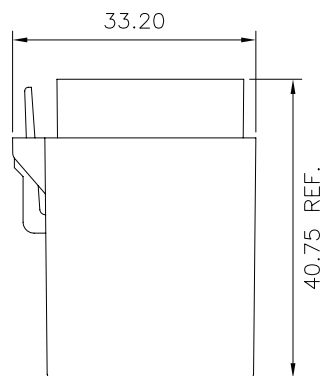

Ordering Code



① ② ③
C6502 XX-XP

- ① Series No.
- ② Housing Type: HM=Plug Housing
- ③ No. of Circuits



- 6.00-5.00mm Pitch Housing - Plug

*Mates with C6500HF Series Housing



Right Type

C6502HM-08P	X	X	X	XX	X	XX	X
	①	②	③	④	⑤	⑥	⑦
① Halogen Free or Not							
② Material							
③ Color							
④ Plating Code for Contacts							
⑤ Plating Code							
⑥ Option Code							
⑦ Packing Code							