

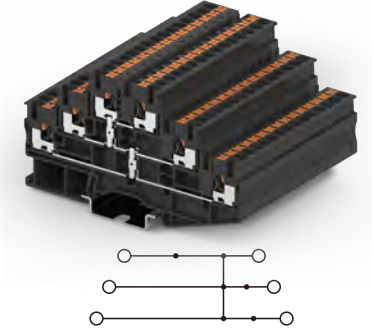


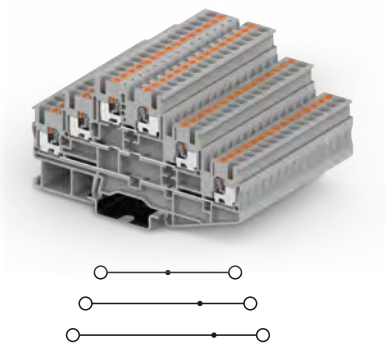


2.5mm² 三层接线端子 Triple Level Terminal Block	
技术参数Technical Parameter	
厚度Thickness	宽度Width
5.2	100.7
高度Height	56.4
IEC	UL
额定电压Rated Voltage	500
额定电流Rated Current	20
接线容量Wire Range	刚性Solid
[mm²]	柔性Fine Stranded
[AWG]	带冷压头Furrule
	0.2-4
	0.2-2.5
	0.2-2.5
	26-12
	26-12
	26-12
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94	V0
Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	8-10
订货信息Order Information	
产品Product	颜色Colour
适配NS 35/7.5导轨	灰Gray
Can Be Used For DIN Rail	橙Orange
NS 35/7.5	蓝Blue
配套附件Accessory	
端板Cover Plate	订货号Order NO.
	TPT2.5-2-GY-EA
厚度2.2mm Thickness2.2mm	TPT2.5-2-OG-EA
	TPT2.5-2-BU-EA
补偿端板Compensatory Plate	订货号Order NO.
厚度1.00mm Thickness1.00mm	*
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	
9	黄Yellow
10	黄Yellow
正面标记Front Marker	订货号Order NO.
10位PCS	*
正面标记和侧面标记Front And Side Marker	订货号Order NO.
可提供印字服务Printing Service	TMB5.2-120


2.5mm² 三层等电位接线端子 Triple Level With Equipotential Bonding Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	100.7	56.4
IEC	UL	
额定电压Rated Voltage	500	
额定电流Rated Current	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded
	带冷压头Furrule	
	0.2-4	0.2-2.5
	0.2-2.5	0.2-2.5
	26-12	26-12
	26-12	26-12
	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级，符合UL94	V0	
Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	8-10	
订货信息Order Information		
产品Product	订货号Order NO.	
适配NS 35/7.5导轨	TPT2.5-2-GY	
Can Be Used For DIN Rail	TPT2.5-2-OG	
NS 35/7.5	*	
	*	
配套附件Accessory		
端板Cover Plate	订货号Order NO.	
	TPT2.5-2-GY-EA	
厚度2.2mm Thickness2.2mm	TPT2.5-2-OG-EA	
	TPT2.5-2-BU-EA	
补偿端板Compensatory Plate	订货号Order NO.	
厚度1.00mm Thickness1.00mm	*	
跨接件Jumper		
位数Poles No.	订货号Order NO.	
2	TJA5.2-2	
3	TJA5.2-3	
4	TJA5.2-4	
...		
9	TJA5.2-9	
10	TJA5.2-10	
正面标记Front Marker	订货号Order NO.	
10位PCS	*	
正面标记和侧面标记Front And Side Marker	订货号Order NO.	
可提供印字服务Printing Service	TMB5.2-120	

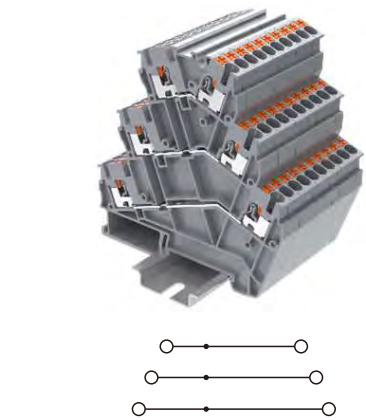

2.5mm² 三层斜面接线端子 Triple level angled type terminal block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
额定电压Rated Voltage	800	
额定电流Rated Current	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded
	带冷压头Furrule	
	0.14-2.5	0.14-2.5
	0.14-2.5	0.14-2.5
	26-12	26-12
	26-12	26-12
	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级，符合UL94	V0	
Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	8-10	
订货信息Order Information		
产品Product	订货号Order NO.	
适配NS 35/7.5导轨	TPTS2.5-2-GY	
Can Be Used For DIN Rail	TPTS2.5-2-OG	
NS 35/7.5	*	
	*	
配套附件Accessory		
端板Cover Plate	订货号Order NO.	
	TPTS2.5-2-GY-EC	
厚度2.2mm Thickness2.2mm	TPTS2.5-2-OG-EC	
	TPTS2.5-2-BU-EC	
补偿端板Compensatory Plate	订货号Order NO.	
厚度1.00mm Thickness1.00mm	*	
跨接件Jumper		
位数Poles No.	订货号Order NO.	
2	TJA5.2-2	
3	TJA5.2-3	
4	TJA5.2-4	
...		
9	TJA5.2-9	
10	TJA5.2-10	
正面标记Front Marker	订货号Order NO.	
10位PCS	*	
正面标记和侧面标记Front And Side Marker	订货号Order NO.	
可提供印字服务Printing Service	TMB5.2-120	

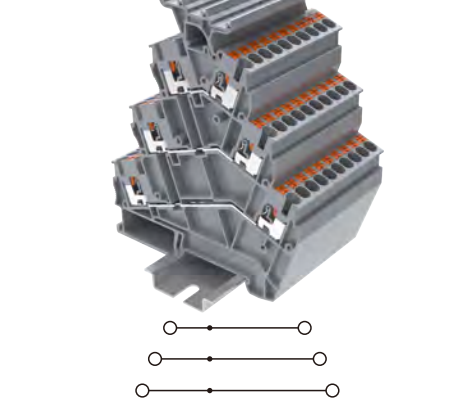

2.5mm² 三层斜面接线端子带支架 Triple level angled type terminal block with marker carrier		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
额定电压Rated Voltage	800	
额定电流Rated Current	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded
	带冷压头Furrule	
	0.14-2.5	0.14-2.5
	0.14-2.5	0.14-2.5
	26-12	26-12
	26-12	26-12
	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级，符合UL94	V0	
Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	8-10	
订货信息Order Information		
产品Product	订货号Order NO.	
适配NS 35/7.5导轨	TPTS2.5-2T-GY	
Can Be Used For DIN Rail	TPTS2.5-2T-OG	
NS 35/7.5	*	
	*	
配套附件Accessory		
端板Cover Plate	订货号Order NO.	
	TPTS2.5-2-GY-EC	
厚度2.2mm Thickness2.2mm	TPTS2.5-2-OG-EC	
	TPTS2.5-2-BU-EC	
补偿端板Compensatory Plate	订货号Order NO.	
厚度1.00mm Thickness1.00mm	*	
跨接件Jumper		
位数Poles No.	订货号Order NO.	
2	TJA5.2-2	
3	TJA5.2-3	
4	TJA5.2-4	
...		
9	TJA5.2-9	
10	TJA5.2-10	
正面标记Front Marker	订货号Order NO.	
10位PCS	*	
正面标记和侧面标记Front And Side Marker	订货号Order NO.	
可提供印字服务Printing Service	TMB5.2-120	

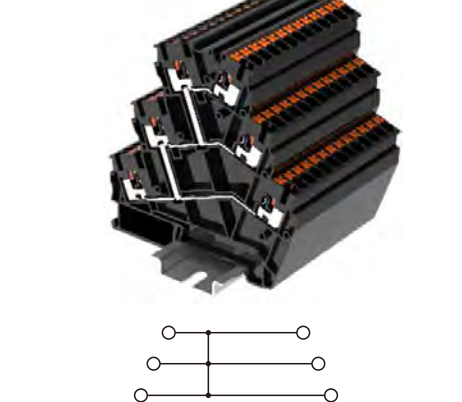

2.5mm² 三层斜面等电位接线端子 Triple level angled type terminal block with equipotential bonding		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	89.1	91
IEC	UL	
额定电压Rated Voltage	800	
额定电流Rated Current	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded
	带冷压头Furrule	
	0.14-2.5	0.14-2.5
	0.14-2.5	0.14-2.5
	26-12	26-12
	26-12	26-12
	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级，符合UL94	V0	
Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	8-10	
订货信息Order Information		
产品Product	订货号Order NO.	
适配NS 35/7.5导轨	TPT2.5-2-PV(黑色)	
Can Be Used For DIN Rail	*	
NS 35/7.5	*	
配套附件Accessory		
端板Cover Plate	订货号Order NO.	
	TPTS2.5-2-GY-EC	
厚度2.2mm Thickness2.2mm	TPTS2.5-2-OG-EC	
	TPTS2.5-2-BU-EC	
补偿端板Compensatory Plate	订货号Order NO.	
厚度1.00mm Thickness1.00mm	*	
跨接件Jumper		
位数Poles No.	订货号Order NO.	
2	TJA5.2-2	
3	TJA5.2-3	
4	TJA5.2-4	
...		
9	TJA5.2-9	
10	TJA5.2-10	
正面标记Front Marker	订货号Order NO.	
10位PCS	*	
正面标记和侧面标记Front And Side Marker	订货号Order NO.	
可提供印字服务Printing Service	TMB5.2-120	