

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

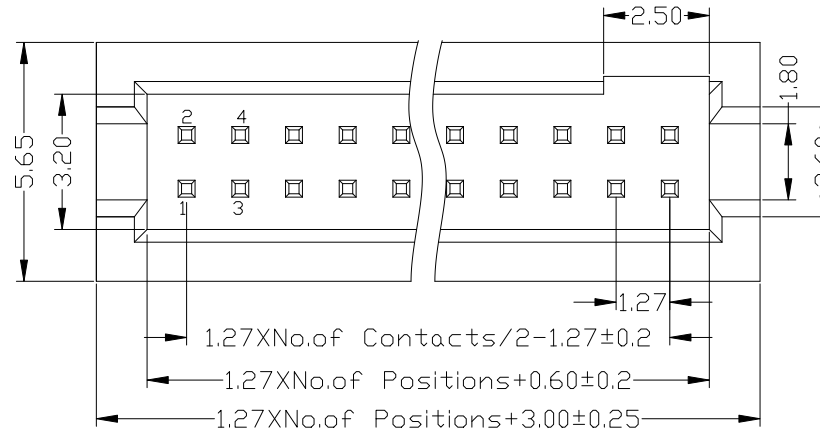



Ordering Information

B357-2 XX XX X M X X X

NO. OF PINS	Contact	Plating	INSULATOR	B:Black	PACKING	1. TYPE 1
4-100P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427	A:PE Bag	2. TYPE 2
	A0=0.8u"	B0=0.8u"	B:PA6T	E:Grey413	B:Tape & Reel	
	A1=1u"	B1=1u"	C:PA9T	W:White	C:Tube	
	A2=1.5u"	B2=1.5u"	D:LCP	U:Blue	D:Tube+CAP	
	A3=2u"	B3=2u"			E:Tray	
	A4=3u"	B4=3u"				
	A5=5u"	B5=5u"				
	A6=10u"	B6=10u"				
	A7=15u"	B7=15u"				
	A8=20u"	B8=20u"				
	A9=30u"	B9=30u"				
	S1=Ordinary Tin Plated					
	S2=Matte Tin Plated					
	S3=Tin-plated High-temperature					

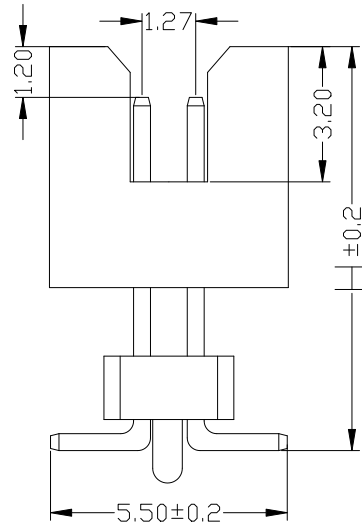

TYPE 2

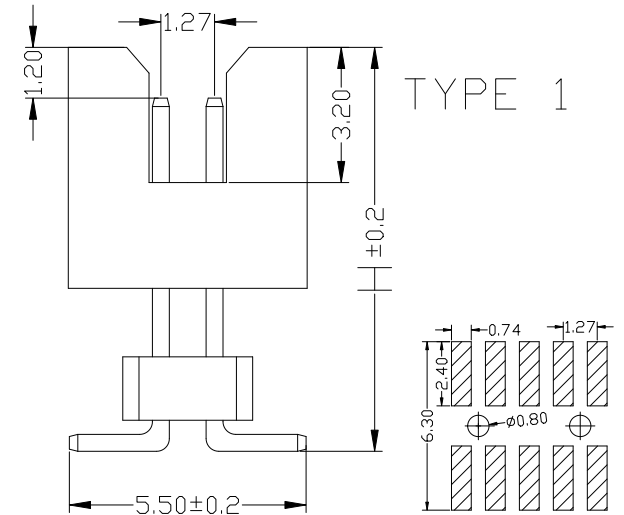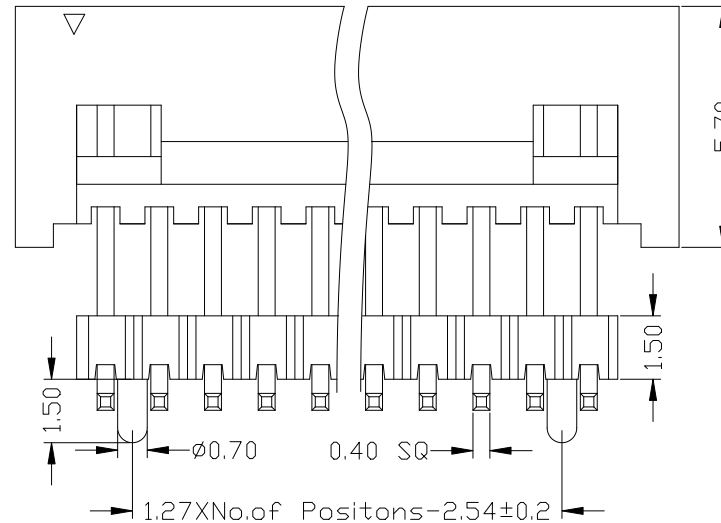

TYPE 1

ITEM	H	
Standard	7.2	8.2
Alternate		

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

X.XX ±0.20

SIZE

A4

DESIGN

上海高霖电子有限公司

PART NO.

B357-2XXXXXXMXXX

X.XXX ±0.10

SHEET

1/1

CHECK

TITLE:

1.27mm 筒牛 加塑胶 SMT

Angle ±3°

PROJ.

APPROVE

Customer No.

DIM TOL

REV DATE MODIFICATION DESCRIPTION CHANGE APPROVE

1 2 3 4 5 6 7 8 9 10