


备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色:黑色.
Housing:PA6T+30%G.F UL94V-0,Color:Black
四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN
Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL




2. 特性(characteristics):

额定电流: 1 AMP
Raring Current:1 AMP.
接触阻抗: 20 m Ω MAX.
Contact Resistance:20 m Ω MAX.
绝缘阻抗: 1000 M Ω MIN.
Insulating Resistance:1000 M Ω MIN.
耐电压: AC 500V.
Withstanding Voltage:AC 500V.
温度范围: -40°C to+105°C
Temperature Range: -40°C to+105°C

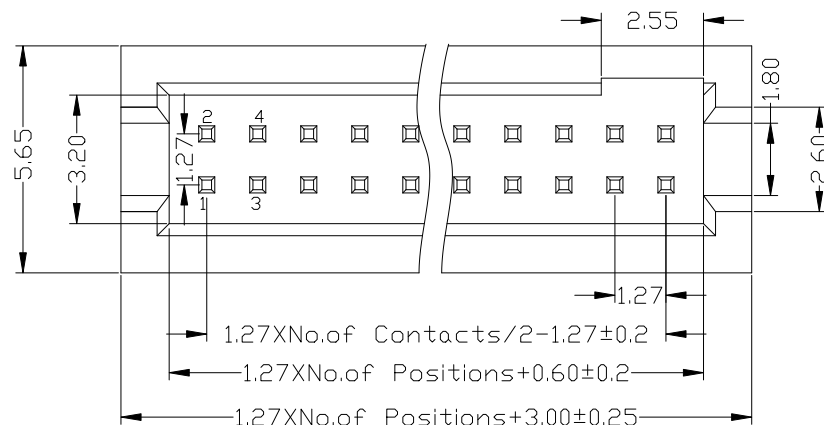

B357-1 XX XX X M X X^AX

NO. OF PINS	Contact Plating		INSULATOR	B:Black	PACKING	1. TYPE 1
4~100P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427	A:PE Bag	2. TYPE 2
A0=0.8u"	B0=0.8U"	B:PA6T	E:Grey413	B:Tape & Reel		
A1=1u"	B1=1U"	C:PA9T	W:White	C:Tube		
A2=1.5u"	B2=1.5U"	D:LCP	U:Blue	D:Tube+CAP		
A3=2u"	B3=2U"			E:Tray		
A4=3u"	B4=3U"					
A5=5u"	B5=5U"					
A6=10u"	B6=10U"					
A7=15u"	B7=15U"					
A8=20u"	B8=20U"					
A9=30u"	B9=30U"					
S1=Ordinary Tin Plated						
S2=Matte Tin Plated						
S3=Tin-plated High-temperature						

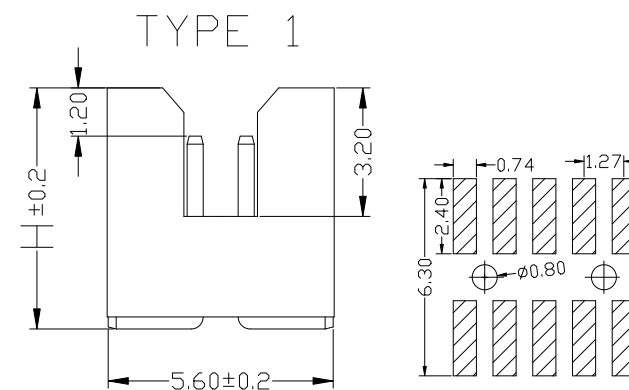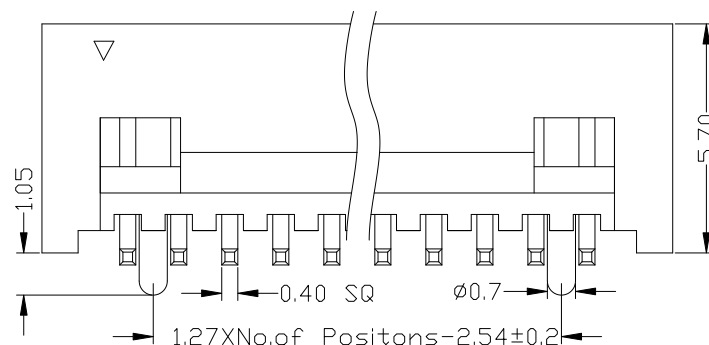
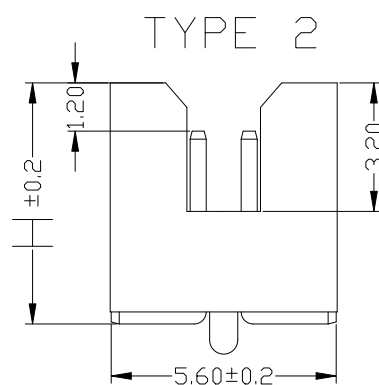


ITEM	H	
Standard	6.0	6.2
Alternate		

上海高霖电子有限公司

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B357-1XXXXXMXXX
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27mm 筒牛 塑高5.7 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

Temperture Range: -40°C to+105°C

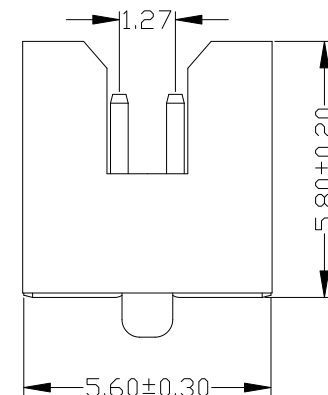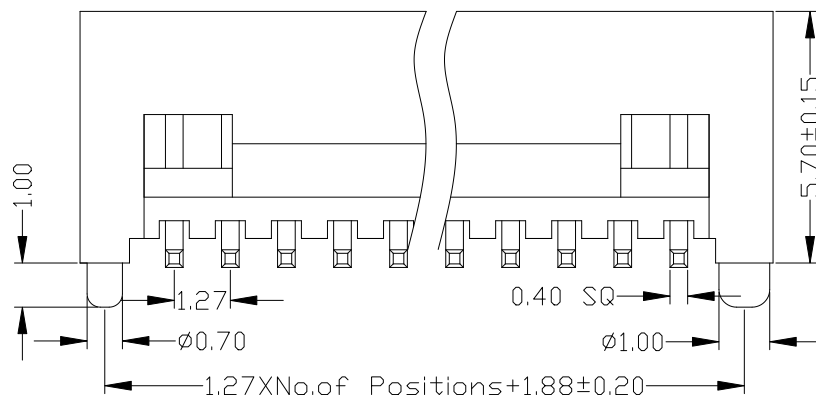Customer No.