

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

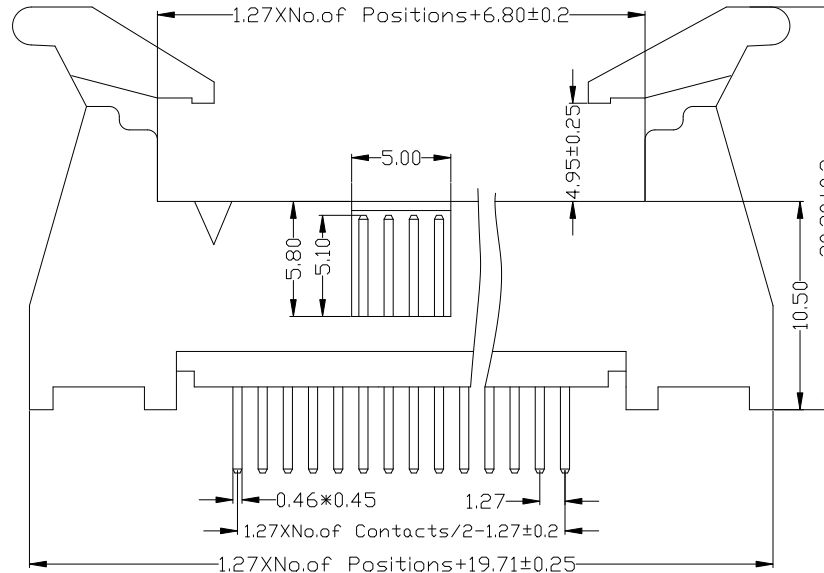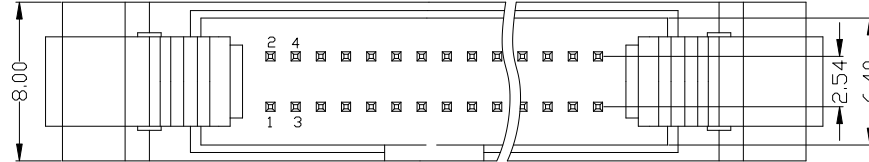

TYPE 1




TYPE 2

Ordering Information

E404-1 XX XX X S X X AX

NO.OF PINS 6-64P	Contact Plating Full Of Gold Semi-gold	INSULATOR MATERIAL:	B:Black G:Grey427 E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray	1:TYPE1 2:TYPE2
A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B:PA6T C:PA9T D:LCP			
S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature					

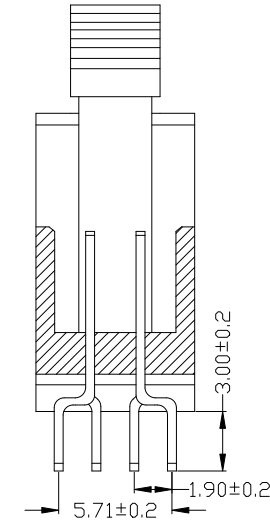

NAME	PART NO
TYPE 1	E404-1XXXXXSXX1
TYPE 2	E404-1XXXXXSXX2

上海高霖电子有限公司

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	E404-1XXXXXSXXX	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1. 27*2. 54 牛角 180度	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		