

Specifications

备注(Remark)


1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Brass, u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):




额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperature Range: -40°C to +105°C

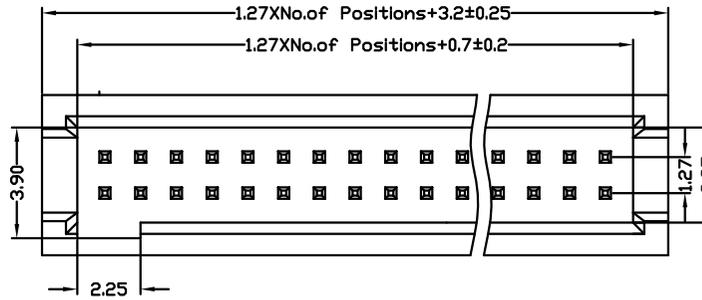

Ordering Information

B390-2 XX XX X S X X

NO. OF PINS 4-100P	Contact Plating Full Of Gold Semi-gold	INSULATOR MATERIAL:	B:Black G:Grey427 E:Grey413 C:PA9T D:LCP U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
A0=0.8u"	B0=0.8U"	B:PA6T		
A1=1u"	B1=1U"	C:PA9T		
A2=1.5u"	B2=1.5U"	D:LCP		
A3=2u"	B3=2U"			
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

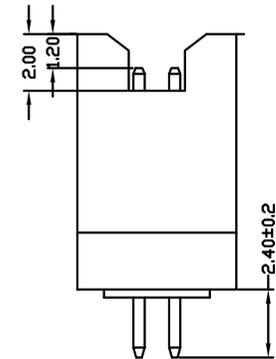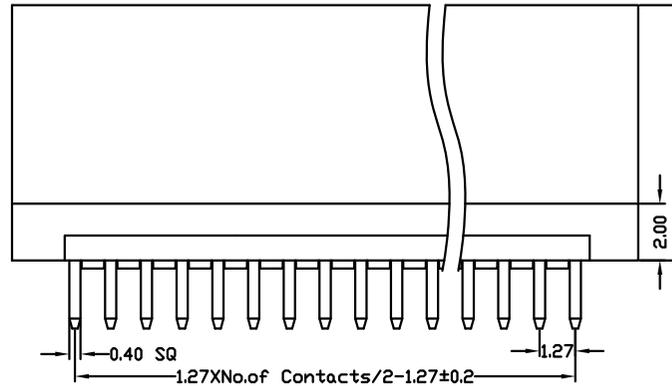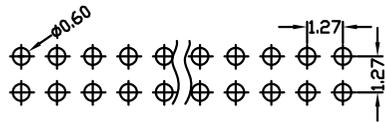

				OPERATION		SCALE		Fit		<h2 style="text-align: center;">上海高霖电子有限公司</h2>					
				X.X	±0.25	UNIT		MM							
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强					PART NO.	B390-2XXXXXSX1
				X.XXX	±0.10	SHEET	1/1	CHECK						TITLE:	1.27mm 筒牛 加高型 双塑 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.				