

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/LCP+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

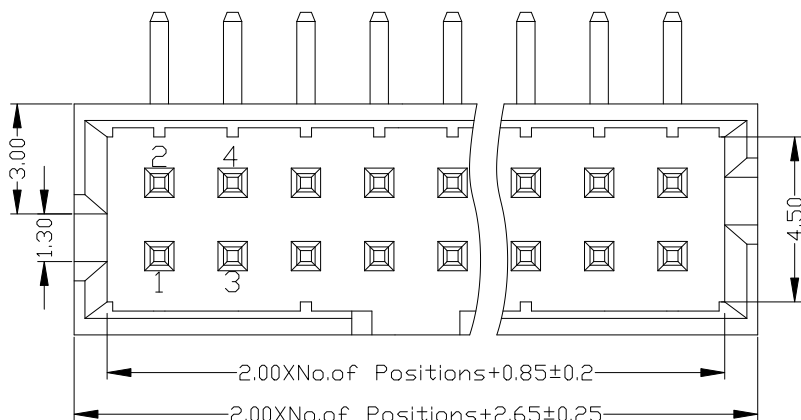

Ordering Information

B265-1 XX XX X R X X

NO.OF PINS
4-100P

Contact Plating
Full Of Gold

Semi-gold

INSULATOR
MATERIAL:

B:Black
G:Grey427

PACKING
A:PE Bag

A0=0.8u"

B0=0.8U"

B:PA6T

B:Tape & Reel

A1=1u"

B1=1U"

C:PA9T

C:Tube

A2=1.5u"

B2=1.5U"

D:LCP

D:Tube+CAP

A3=2u"

B3=2U"

U:Blue

E:Tray

A4=3u"

B4=3U"

A5=5u"

B5=5U"

A6=10u"

B6=10U"

A7=15u"

B7=15U"

A8=20u"

B8=20U"




A9=30u"

B9=30U"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

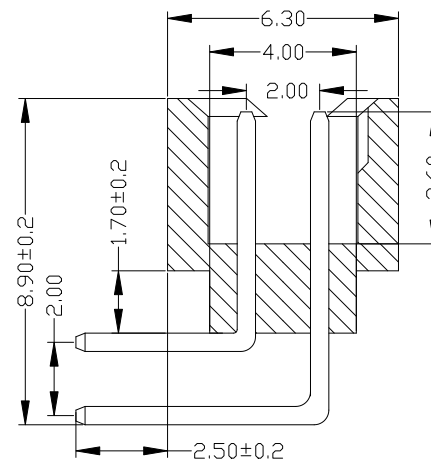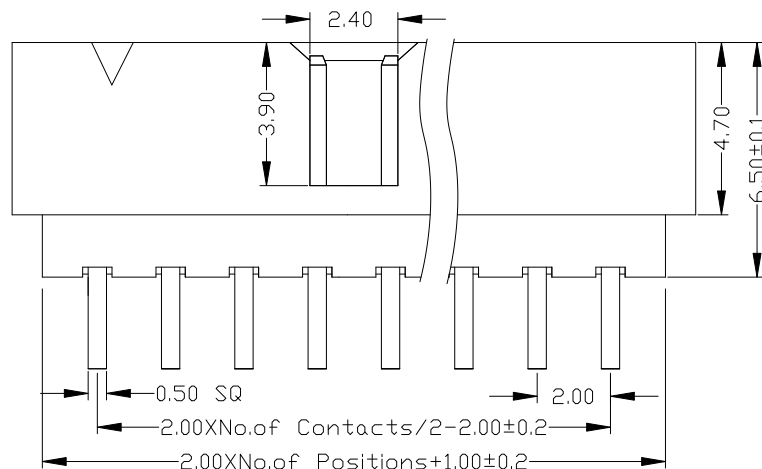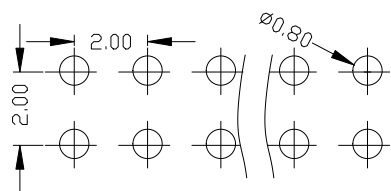

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

SIZE

A4

DESIGN

X.XXX ±0.10

SHEET

1/1

CHECK

Angle ±3°

PROJ.

APPROVE

DIM TOL

上海高霖电子有限公司

卢小强

PART NO.

B265-1XXXXXXRX1

TITLE:

2.0mm 莫仕筒牛 塑高6.5 90度

Customer No.

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

B264-1 XX XX X R X X

NO. OF PINS 4-100P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL: B: PA6T C: PA6T D: LCP	B: Black E: Grey427 F: Grey413 G: White H: Blue	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
A0=0.8u"	B0=0.8u"	B1=1U"	B2=1.5U"	B3=2U"	B4=3U"
A1=1u"	B1=1U"	B2=1.5U"	B3=2U"	B4=3U"	B5=5U"
A2=1.5u"	B2=1.5U"	B3=2U"	B4=3U"	B5=5U"	B6=10U"
A3=2u"	B3=2U"	B4=3U"	B5=5U"	B6=10U"	B7=15U"
A4=3u"	B4=3U"	B5=5U"	B6=10U"	B7=15U"	B8=20U"
A5=5u"	B5=5U"	B6=10U"	B7=15U"	B8=20U"	B9=30U"
A6=10u"	B6=10U"	B7=15U"	B8=20U"	B9=30U"	S1=Ordinary Tin Plated
A7=15u"	B7=15U"	B8=20U"	B9=30U"	S1=Ordinary Tin Plated	S2=Matte Tin Plated
A8=20u"	B8=20U"	B9=30U"	S1=Ordinary Tin Plated	S2=Matte Tin Plated	S3=Tin-plated High-temperature
A9=30u"	B9=30U"	S1=Ordinary Tin Plated	S2=Matte Tin Plated	S3=Tin-plated High-temperature	

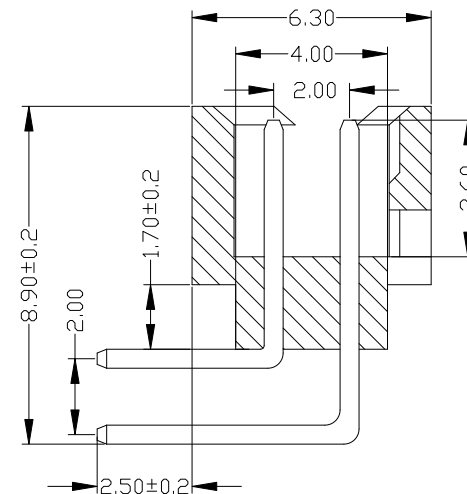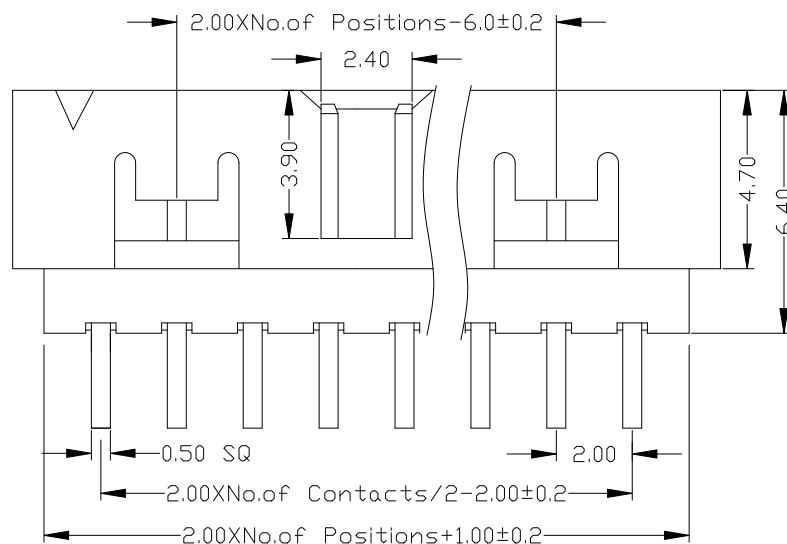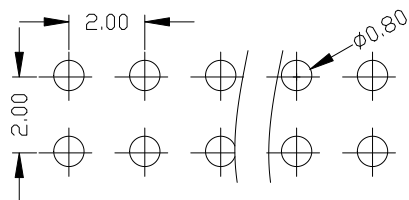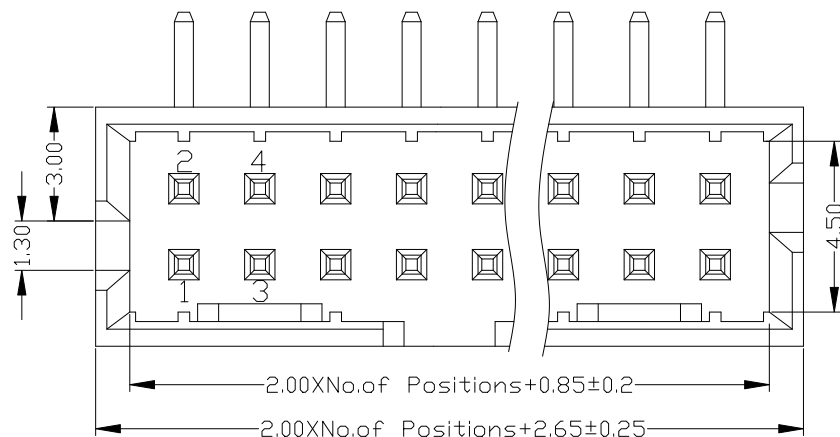

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

SIZE

A4

DESIGN

X.XXX ±0.10

SHEET

1/1

CHECK

Angle ±3°

PROJ.

APPROVE

DIM TOL

上海高霖电子有限公司

卢小强

PART NO.

B264-1XXXXXXRX1

TITLE:

2.0mm 筒牛 塑高6.4 90度

Customer No.

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE