

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/LCP+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/LCP+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

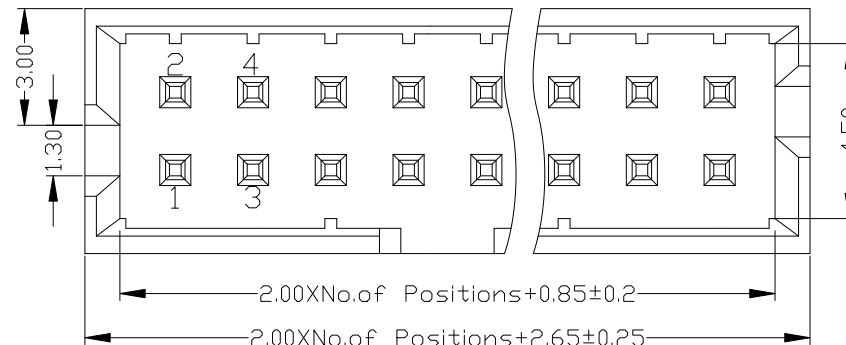

Ordering Information

B265-1 XX XX X S X XA

NO.OF PINS	Contact Plating	INSULATOR MATERIAL	B:Black	PACKING
4~100P	Full Of Gold	Semi-gold	G:Grey427	A:PE Bag
A0=0.8u"	B0=0.8u"	B:PA6T	E:Grey413	B:Tape & Reel
A1=1u"	B1=1u"	C:PA9T	W:White	C:Tube
A2=1.5u"	B2=1.5u"	D:LCP	U:Blue	D:Tube+CAP
A3=2u"	B3=2U"			E:Tray
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

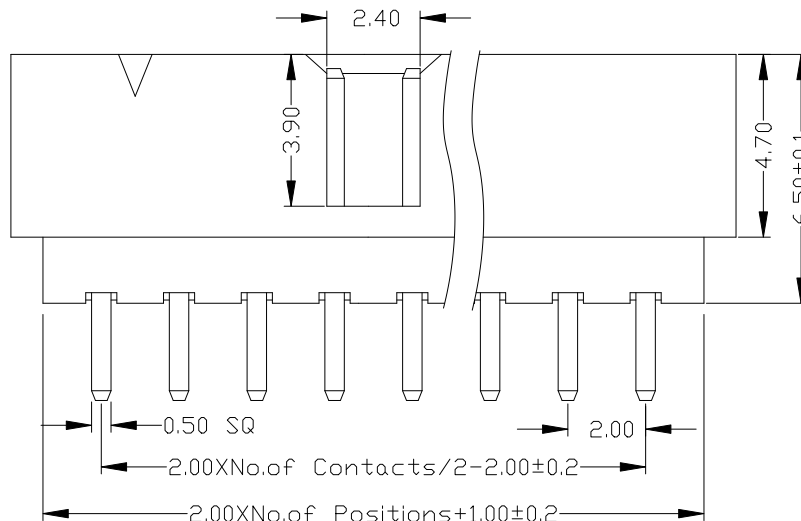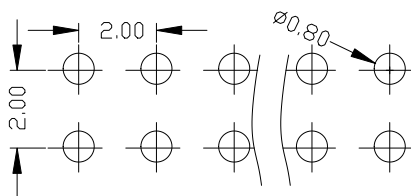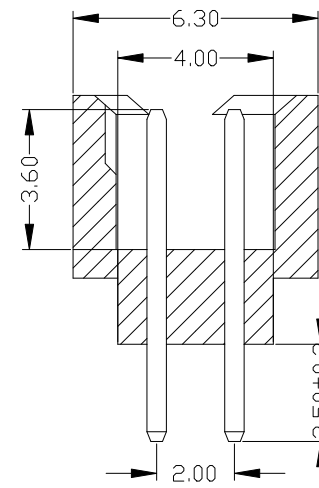

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

B265-1XXXXXSXX1

2.0mm 莫仕筒牛 塑高6.5 180度

REV

1

DATE

2

MODIFICATION DESCRIPTION

3

CHANGE

4

APPROVE

5

6

7

8

9

10

