

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

E20X-1 XX XX X M X X

1. LONG-EARED	NO. OF PINS	Contact Plating	INSULATOR	B: Black	PACKING
2. SHORT-EARED	6-64P	Full Of Gold	MATERIAL: G: Grey427	A: PE Bag	
		A0=0.8u"	B0=0.8U"	B: PA6T	E: Grey413
		A1=1u"	B1=1U"	C: PA6T	W: White
		A2=1.5u"	B2=1.5U"	D: LCP	U: Blue
		A3=2u"	B3=2U"		D: Tube+CAP
		A4=3u"	B4=3U"		E: Tray
		A5=5u"	B5=5U"		
		A6=10u"	B6=10U"		
		A7=15u"	B7=15U"		
		A8=20u"	B8=20U"		
		A9=30u"	B9=30U"		
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

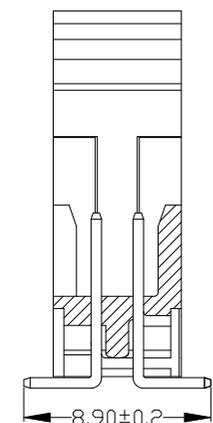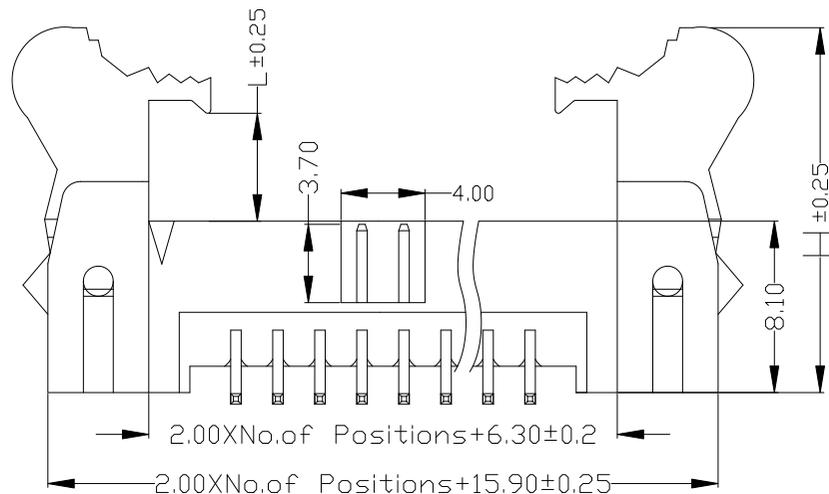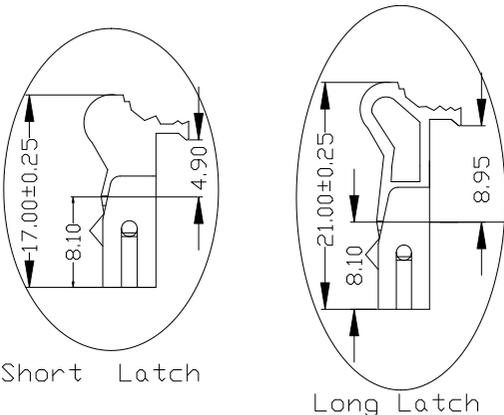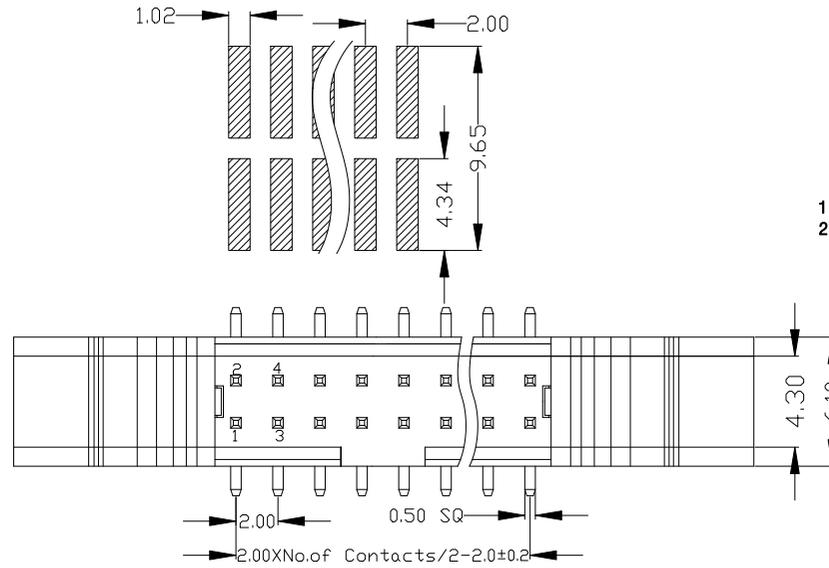

NAME	PART NO
Long Latch	E201-1XXXXXMXX1
Short Latch	E202-1XXXXXMXX1

上海高霖电子有限公司

		OPERATION		SCALE		Fit		上海高霖电子有限公司 卢小强 PART NO. E20X-1XXXXXMXX1 TITLE: 2.0mm 牛角 SMT Customer No.			
		X.X	±0.25	UNIT		MM					
		X.XX	±0.20	SIZE	A4	DESIGN					
		X.XXX	±0.10	SHEET	1/1	CHECK					
		Angle	±3°	PROJ.	☉	APPROVE					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL				