

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rated Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

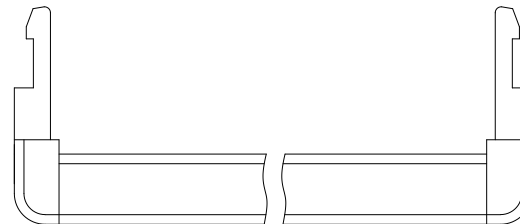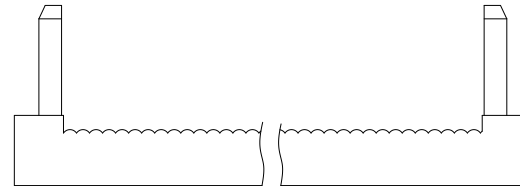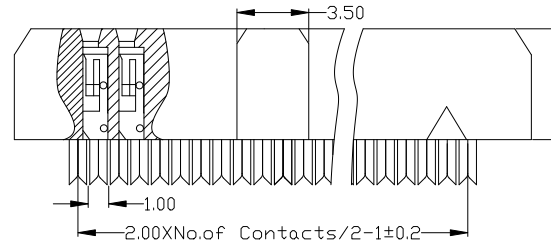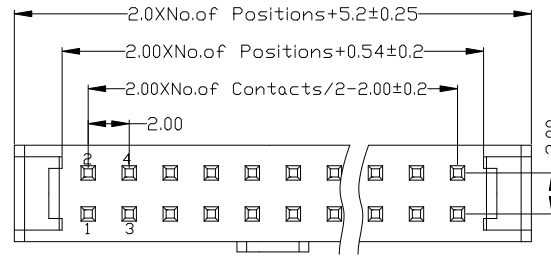

Ordering Information

IDC2 - XX 3 54 XX A

NO. OF PINS
6-64P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR

MATERIAL:

A: PBT




B: Black

G: Grey427

E: Grey413

W: White

U: Blue



上海高霖电子有限公司

卢小强

PART NO.

IDC2-XX354XXATX2

TITLE:

2.00 IDC 塑高5.4 弹片式 三件式 带凸点

Customer No.

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

⊕

APPROVE

DESIGN

CHECK

APPROVE

REV

1

2

3

4

5

6

7

8

9

10

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rated Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

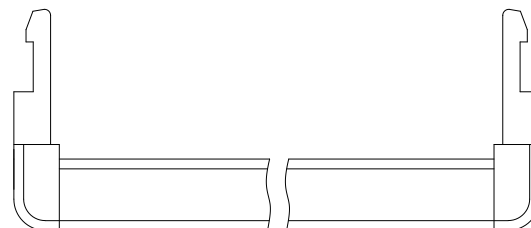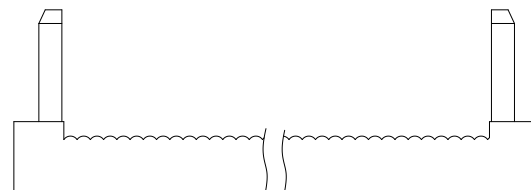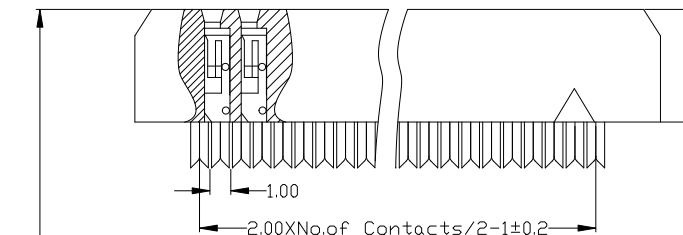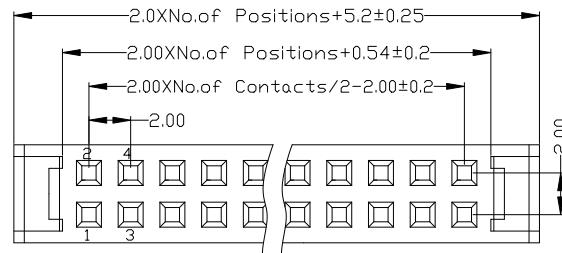

Ordering Information

IDC2 - XX 3 54 XX A

NO. OF PINS
6-64P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Semi-gold

B0=0.8u"

B1=1u"

B2=1.5u"

B3=2u"

B4=3u"

B5=5u"

B6=10u"

B7=15u"

B8=20u"

B9=30u"

INSULATOR

MATERIAL:

A: PBT




B: Black

G: Grey427

E: Grey413

W: White

U: Blue



					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	IDC2-XX354XXATX1	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00 IDC 塑高5.4 弹片式 三件式 无凸点	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		