

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

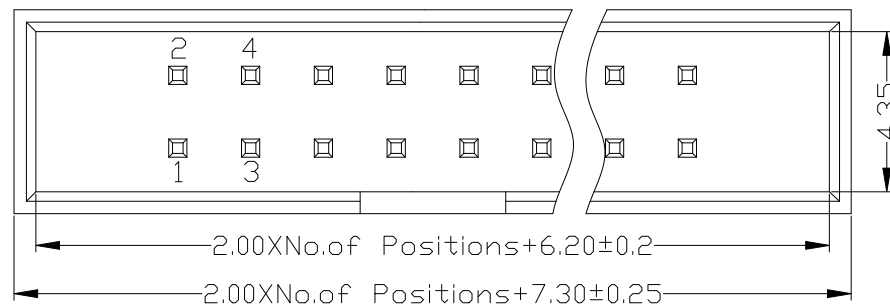

Ordering Information

B257-1 XX XX X S X X_A 1

NO. OF PINS 4~100P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL:	B: Black	PACKING
A0=0.8u"	B0=0.8u"	G: Grey427	A: PE Bag		
A1=1u"	B1=1u"	C: PA6T	B: Tape & Reel		
A2=1.5u"	B2=1.5u"	D: LCP	C: Tube		
A3=2u"	B3=2u"		D: Tube+CAP		
A4=3u"	B4=3u"		E: Tray		
A5=5u"	B5=5u"				
A6=10u"	B6=10u"				
A7=15u"	B7=15u"				
A8=20u"	B8=20u"				
A9=30u"	B9=30u"				
S1=Ordinary Tin Plated					
S2=Matte Tin Plated					
S3=Tin-plated High-temperature					

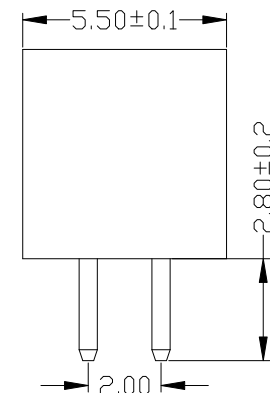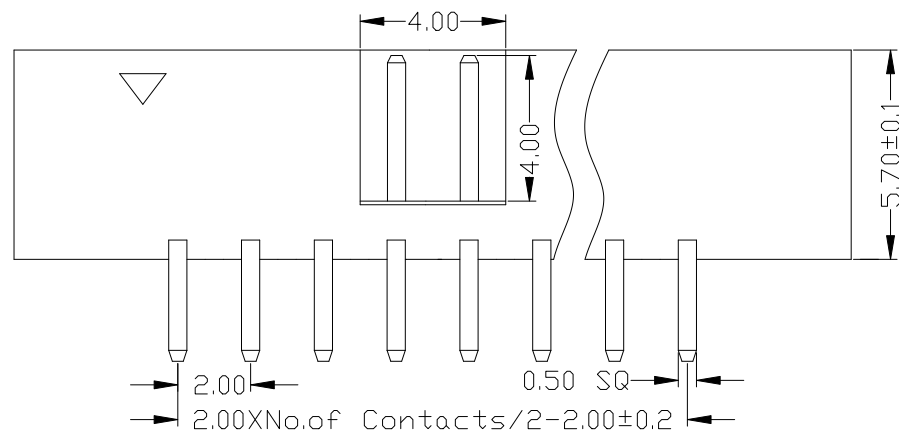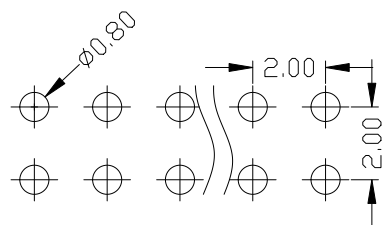

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	± 0.25	UNIT		MM				
				X.XX	± 0.20	SIZE	A4	DESIGN	卢小强			
				X.XXX	± 0.10	SHEET	1/1	CHECK	PART NO.			
				Angle	$\pm 3^\circ$	PROJ.		APPROVE	TITLE:			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL			Customer No.		

上海高霖电子有限公司

卢小强

PART NO.

B257-1XXXXXSXX1

TITLE:

2.0mm 筒牛 塑高5.7 180度

Customer No.