



Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PBT+30%G. F UL94V-0
Housing: PBT+30%G. F UL94V-0
端子: 黄铜、磷铜、青铜
Contact: Brass、Phosphor、bronze
2. 特性(characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 30 mΩ MAX.
Contact Resistance: 30 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 1000V.
Withstanding Voltage: AC 1000V.
温度范围: -55°C to +105°C
Temperature Range: -55°C to +105°C

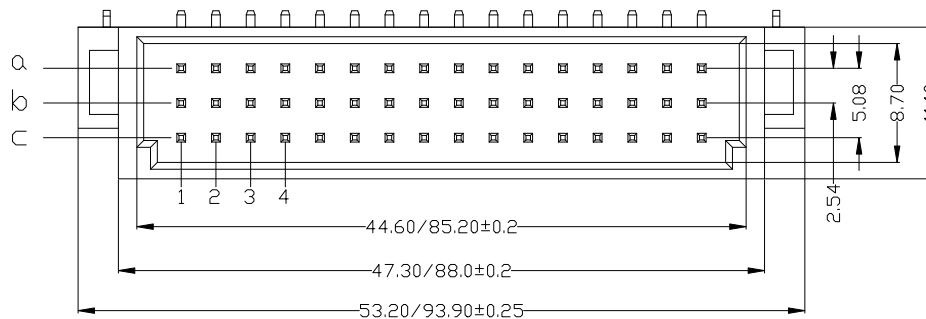

ORDERING INFORMATION



NUMBER OF CONTACTS	Pitch	ROWS/Positions with Contacts	
48	96	a+b+c	
32A 64A	2.54	a+c	
32B 64B	2.54	a+b	
16	32	a	
24	48	a+b+c ALL EVEN NO	
16	32	a+b ALL EVEN NO	

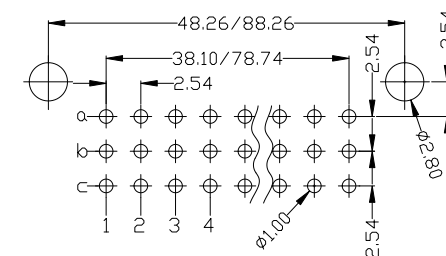

Ordering Information

DINA-3 XX X M R XX N A 1

NO.OF PINS	TERMINAL ALLOT	TYPE	TYPE	Contact Plating
16P Per Row	A=a+b+c	F=FEMALE	S=180°	Full Of Gold
32P Per Row	B=a+b	M=MALE	R=90°	Semi-gold
	C=a+c			
	D=a			
				A0=0.8u"
				B0=0.8u"
				A1=1u"
				B1=1u"
				A2=1.5u"
				B2=1.5u"
				A3=2u"
				B3=2u"
				A4=3u"
				B4=3u"
				A5=5u"
				B5=5u"
				A6=10u"
				B6=10u"
				A7=15u"
				B7=15u"
				A8=20u"
				B8=20u"
				A9=30u"
				B9=30u"
				S1=Ordinary Tin Plated
				S2=Matte Tin Plated
				S3=Tin-plated High-temperature

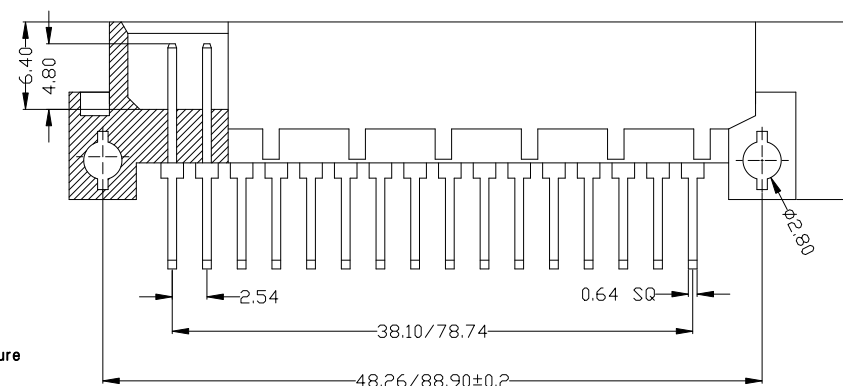

				OPERATION		SCALE		Fit	上海高霖电子有限公司		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	DINA-3XXXXMRXXNA1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	欧式插座 三排 90度 公座
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE			APPROVE		Customer No.	