


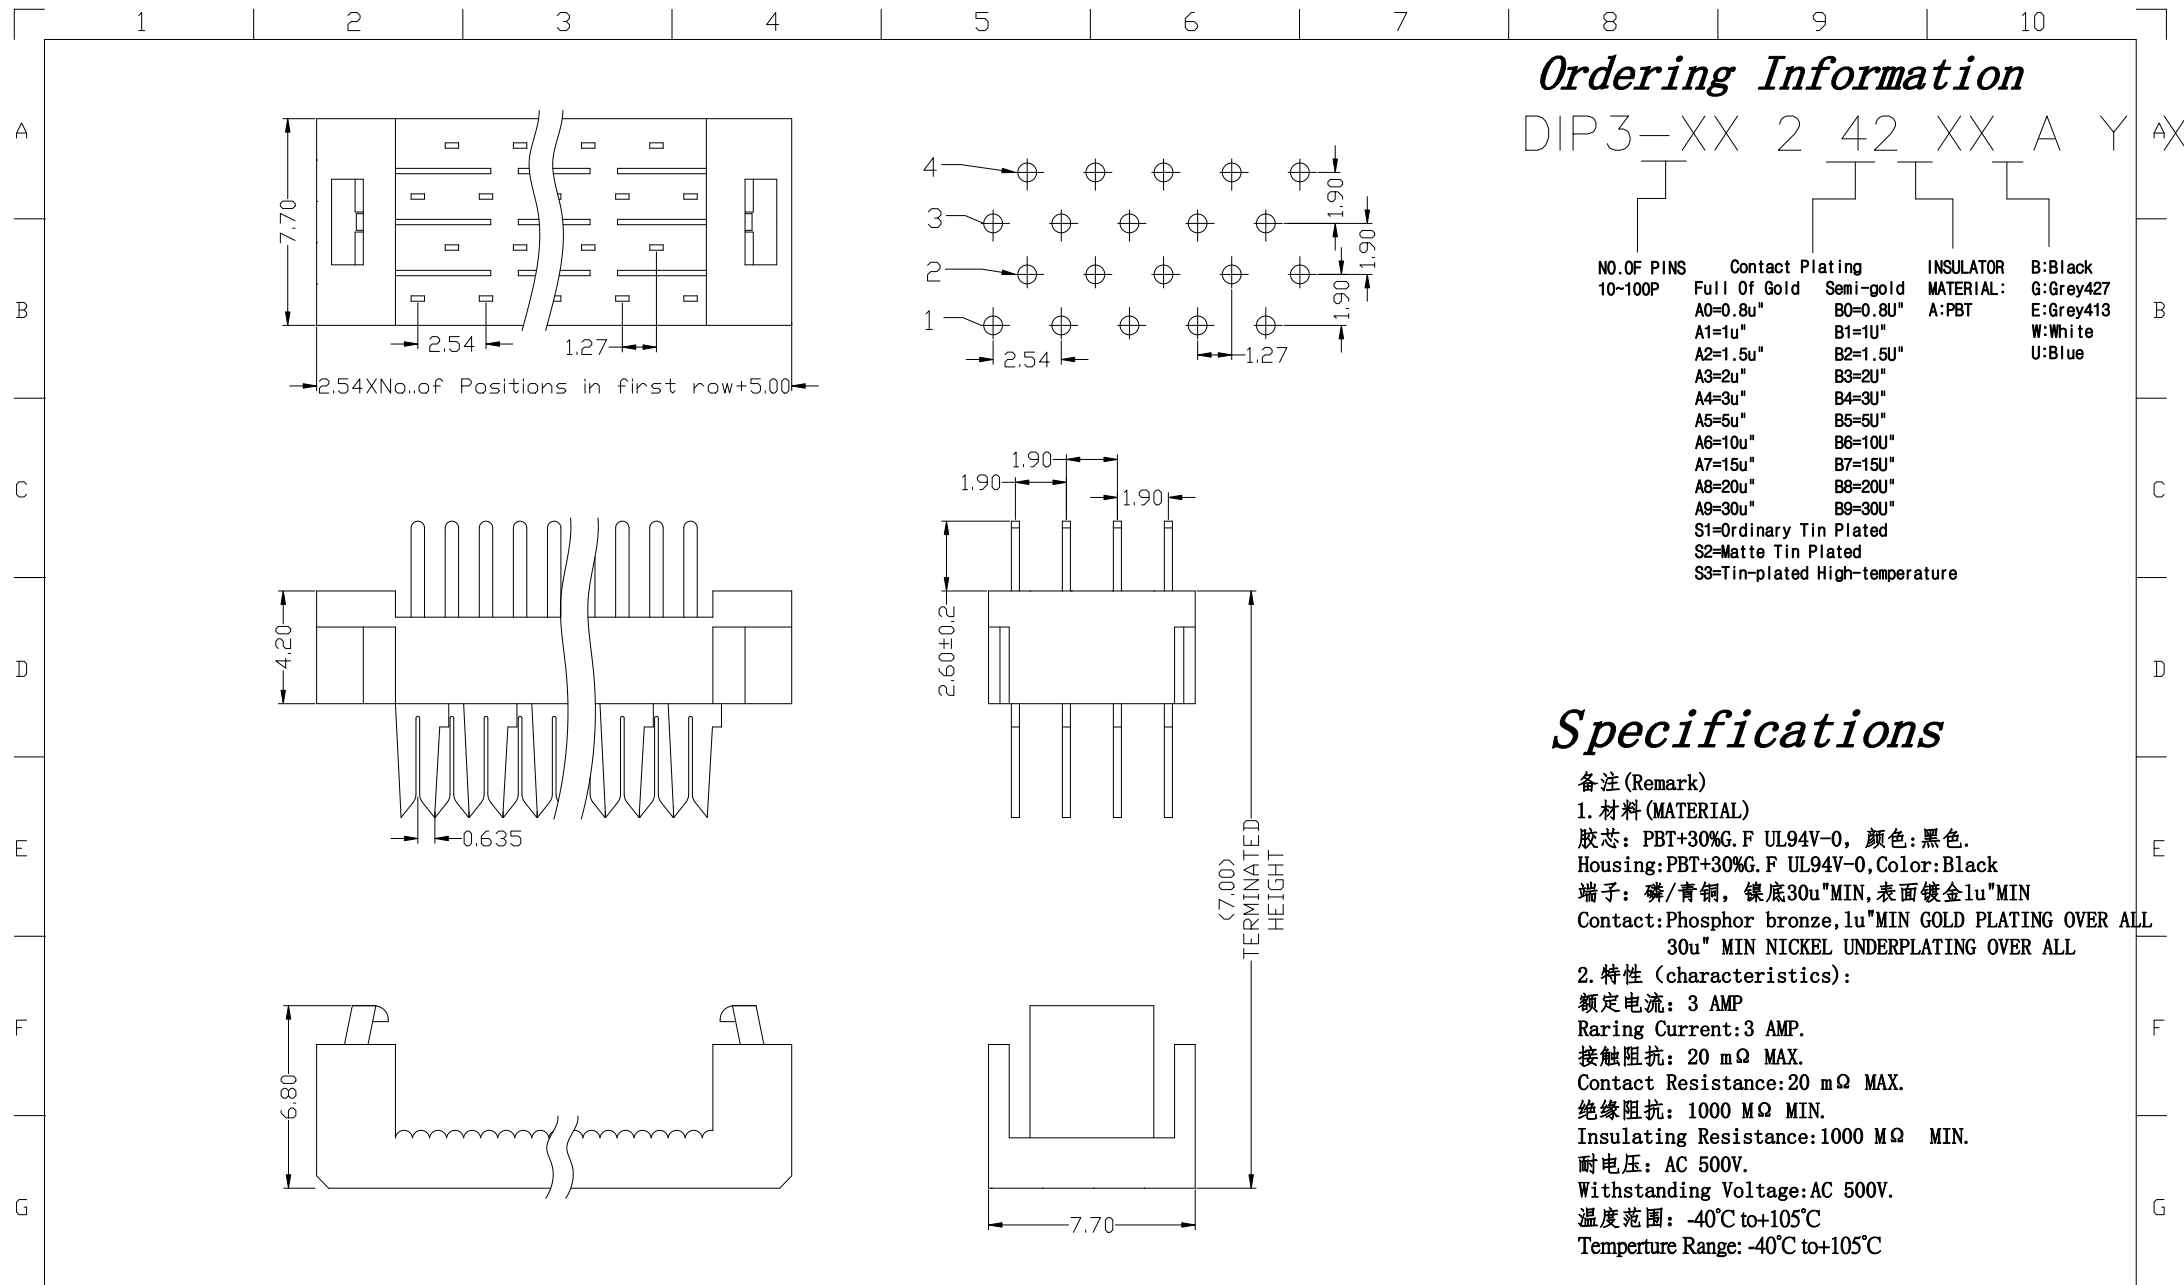

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强		PART NO.	DIP3-XX242XXAYX1
					X.XXX	±0.10	SHEET	1/1	CHECK			TITLE:	1.27mmDIP 塑高4.2 两件式 Y型
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.	PROJ.	APPROVE			Customer No.	
1					4		5	6	7			8	9 10

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

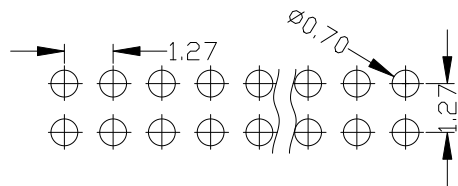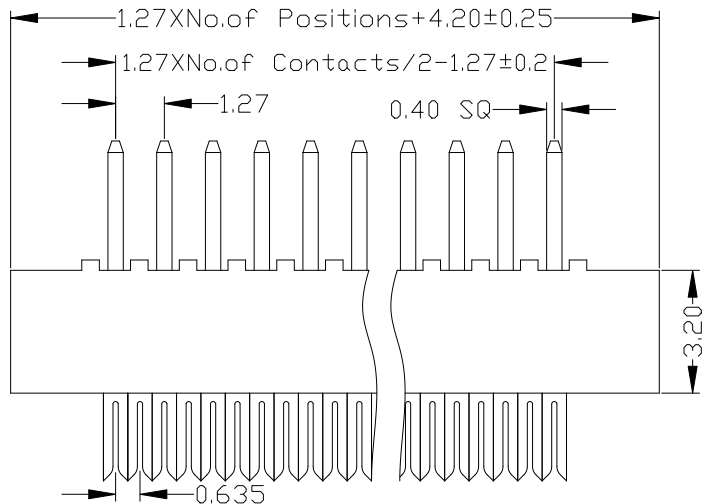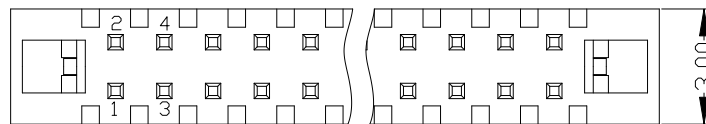

Ordering Information

DIP3 - XX 2 32 XX A Y
X

NO. OF PINS 6-80P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	INSULATOR MATERIAL: A: PBT B: Black G: Grey427 E: Grey413 W: White U: Blue
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature		

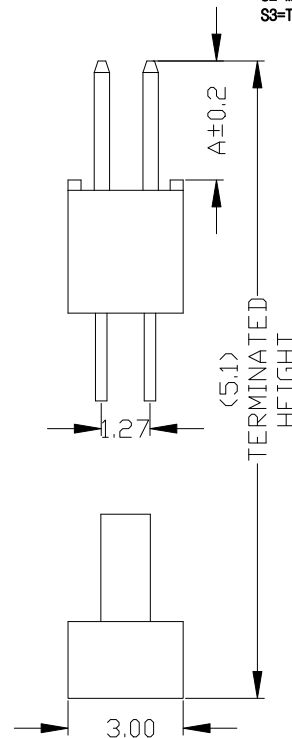

DIM "A"	PART NO
3.10	DIP3-XX232XXAYX1
1.90	DIP3-XX232XXAYX2

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	DIP3-XX232XXAYXX	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27*1.27mm DIP 塑高3.2 两件式	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		

A

B

D

F

F

G

H

					OPERATION	
					X.X	±0.25
					X.XX	±0.20
					X.XXX	±0.10
					Angle	±3°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL

SCALE		Fit
UNIT		MM
SIZE	A4	DES
SHEET	1/1	CHE
PROJ.		APPL

IGN	
HECK	
ROVE	

上
卢小弼

强	
	0

PART NO.
TITLE:
Customer Name

电子:	
No.	

有限

DI



1.27*

公司
P4-XX2
2.54mm

32XXAY
DIP 塑高

3.2

	H
--	---

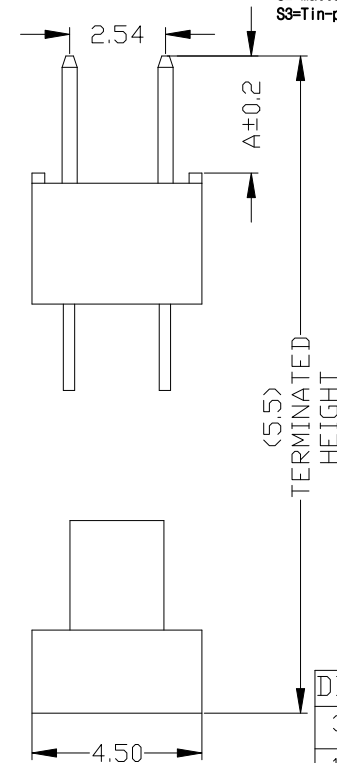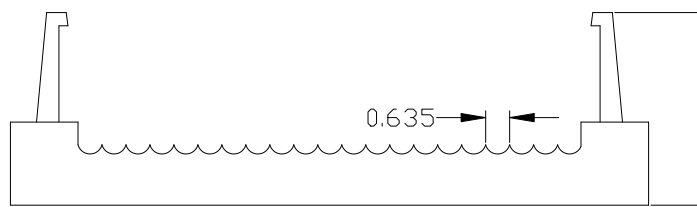

NO. OF PINS	Contact Plating		INSULATOR	B:Black
6-80P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427
	A0=0.8u"	B0=0.8U"	A:PBT	E:Grey413
	A1=1u"	B1=1U"		W:White
	A2=1.5u"	B2=1.5U"		U:Blue
	A3=2u"	B3=2U"		
	A4=3u"	B4=3U"		
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
	A8=20u"	B8=20U"		
	A9=30u"	B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

DIM "A"	PART NO
3.10	DIP4-XX232XXAYX1
1.90	DIP4-XX232XXAYX2

上海高霖电子有限公司

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	DIP4—XX232XXAYXX
					X.XXX	±0.10						
					Angle	±3°						
							SHEET	1/1	CHECK		TITLE:	1. 27*2. 54mm DIP 塑高3. 2
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	