


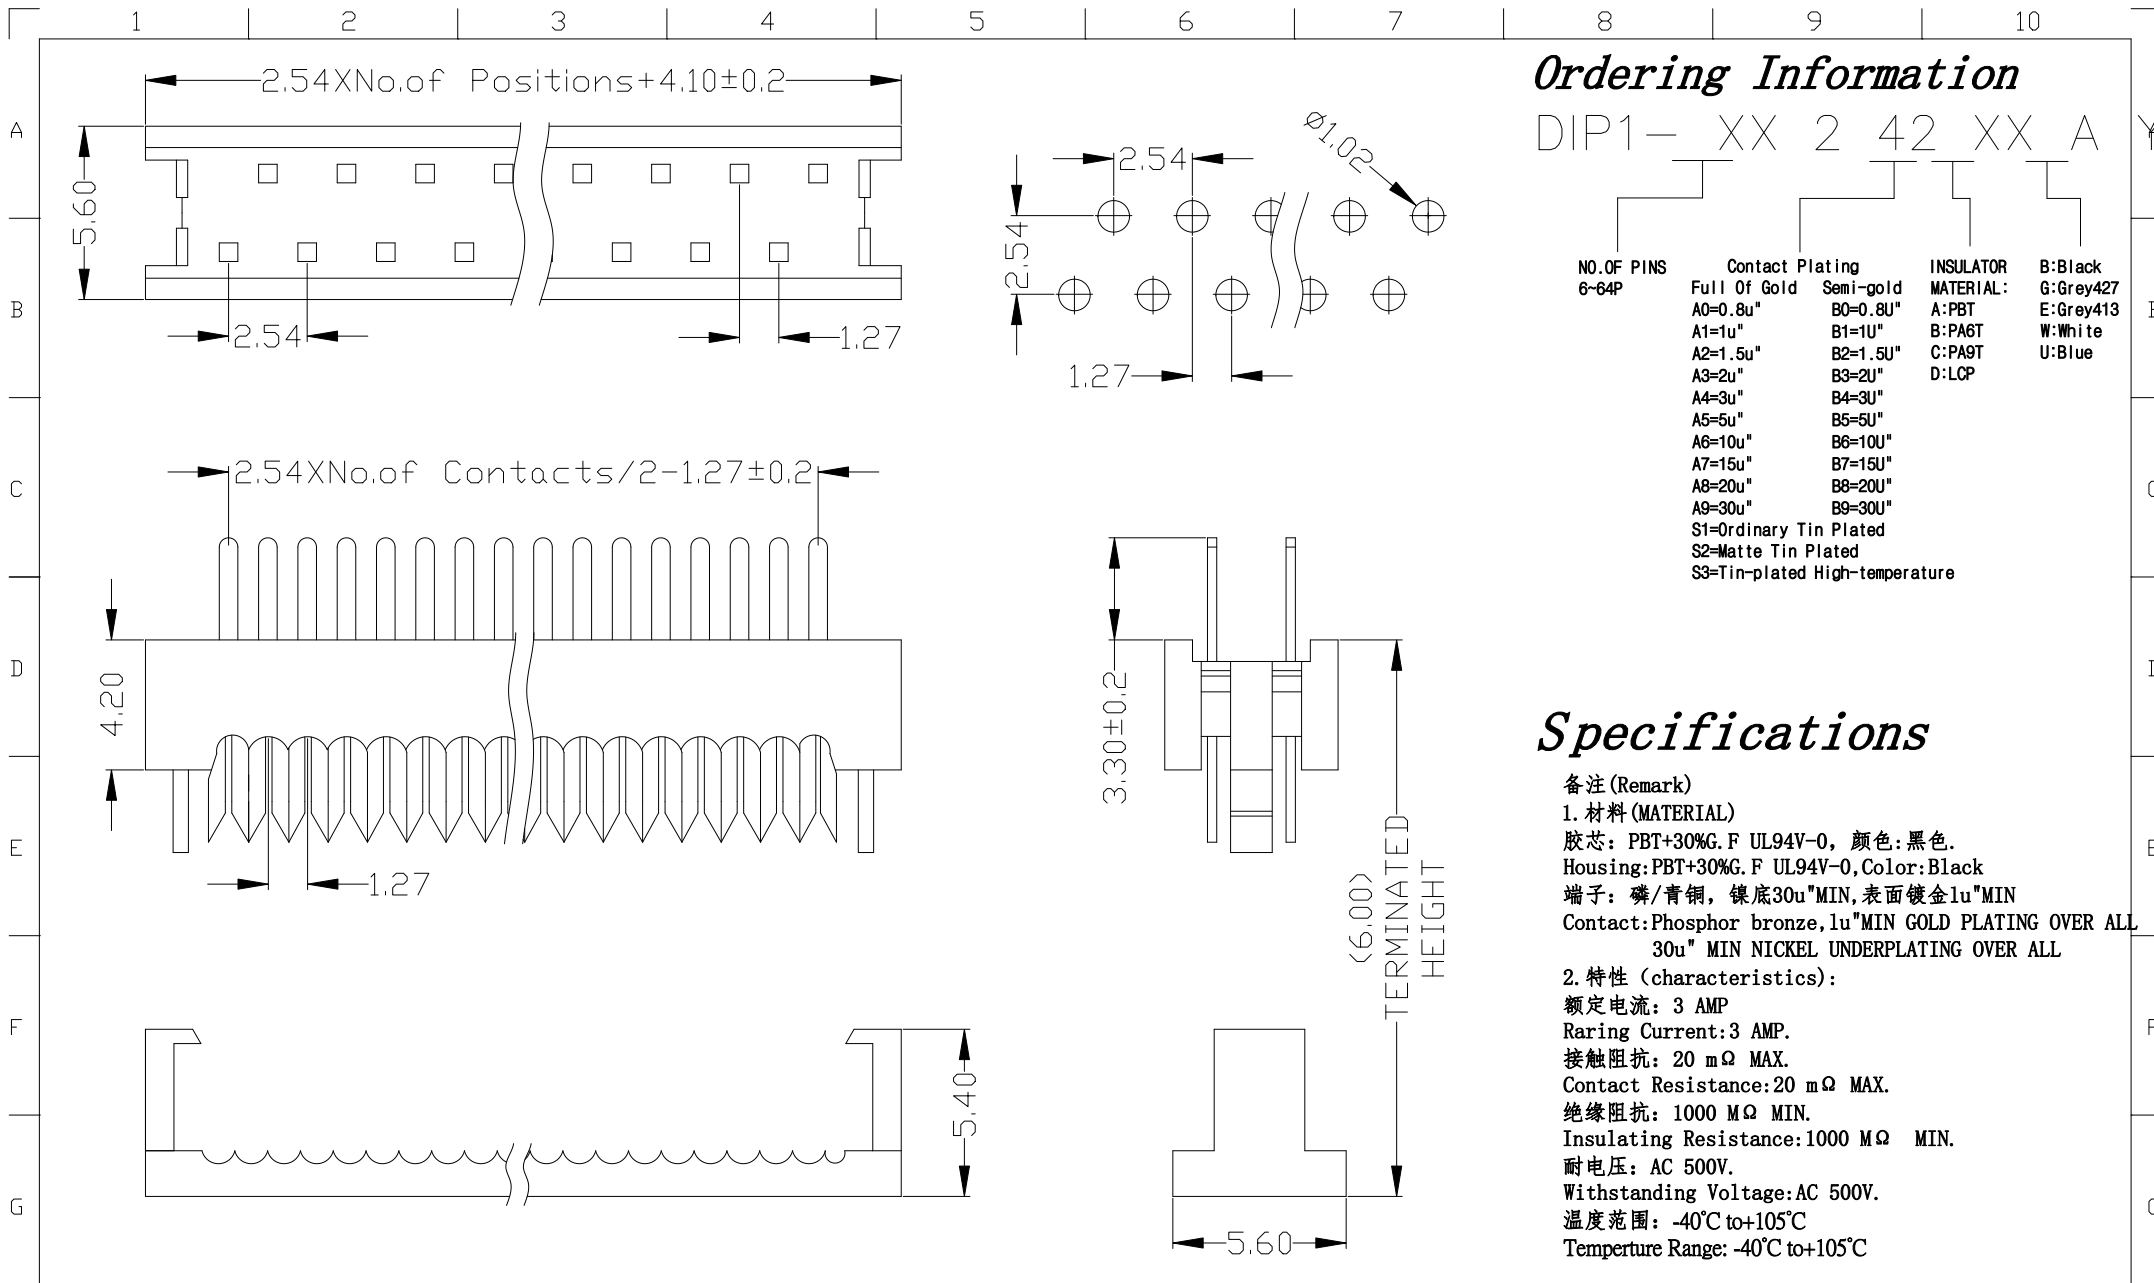

Ordering Information






DIP1— XX 2 42 XX A

| NO.OF PINS<br>6-64P | Contact Plating                |           | INSULATOR<br>MATERIAL: | B:Black<br>G:Grey427<br>E:Grey413<br>W:White<br>U:Blue |
|---------------------|--------------------------------|-----------|------------------------|--------------------------------------------------------|
|                     | Full Of Gold                   | Semi-gold |                        |                                                        |
|                     | A0=0.8u"                       | B0=0.8U"  | A:PBT                  |                                                        |
|                     | A1=1u"                         | B1=1U"    | B:PA6T                 |                                                        |
|                     | A2=1.5u"                       | B2=1.5U"  | C:PA9T                 |                                                        |
|                     | A3=2u"                         | B3=2U"    | D:LCP                  |                                                        |
|                     | A4=3u"                         | B4=3U"    |                        |                                                        |
|                     | A5=5u"                         | B5=5U"    |                        |                                                        |
|                     | A6=10u"                        | B6=10U"   |                        |                                                        |
|                     | A7=15u"                        | B7=15U"   |                        |                                                        |
|                     | A8=20u"                        | B8=20U"   |                        |                                                        |
|                     | A9=30u"                        | B9=30U"   |                        |                                                        |
|                     | S1=Ordinary Tin Plated         |           |                        |                                                        |
|                     | S2=Matte Tin Plated            |           |                        |                                                        |
|                     | S3=Tin-plated High-temperature |           |                        |                                                        |

Specifications

- 备注 (Remark)
1. 材料 (MATERIAL)
- 胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.
- Housing: PBT+30%G. F UL94V-0, Color: Black
- 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
- Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
- 30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
- 额定电流: 3 AMP
- Raring Current: 3 AMP.
- 接触阻抗: 20 mΩ MAX.
- Contact Resistance: 20 mΩ MAX.
- 绝缘阻抗: 1000 MΩ MIN.
- Insulating Resistance: 1000 MΩ MIN.
- 耐电压: AC 500V.
- Withstanding Voltage: AC 500V.
- 温度范围: -40°C to +105°C
- Temperture Range: -40°C to +105°C

|     |      |                          |   |   | OPERATION |         | SCALE |     | Fit     | 上海高霖电子有限公司 |              |                  |  |
|-----|------|--------------------------|---|---|-----------|---------|-------|-----|---------|------------|--------------|------------------|--|
|     |      |                          |   |   | X.X       | ±0.25   | UNIT  |     | MM      |            |              |                  |  |
|     |      |                          |   |   | X.XX      | ±0.20   | SIZE  | A4  | DESIGN  | 卢小强        | PART NO.     | DIP1—XX242XXAYX1 |  |
|     |      |                          |   |   | X.XXX     | ±0.10   | SHEET | 1/1 | CHECK   |            | TITLE:       | 2.54mm DIP 塑高4.2 |  |
| REV | DATE | MODIFICATION DESCRIPTION |   |   | CHANGE    | APPROVE | PROJ. | Φ   | APPROVE |            | Customer No. |                  |  |
| 1   |      | 2                        | 3 | 4 | 5         | 6       | 7     | 8   | 9       | 10         |              |                  |  |

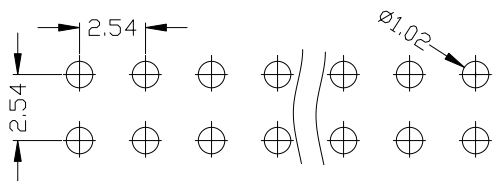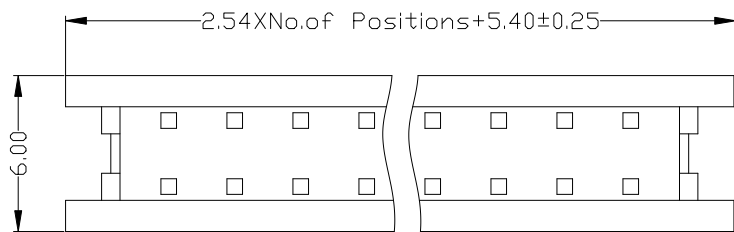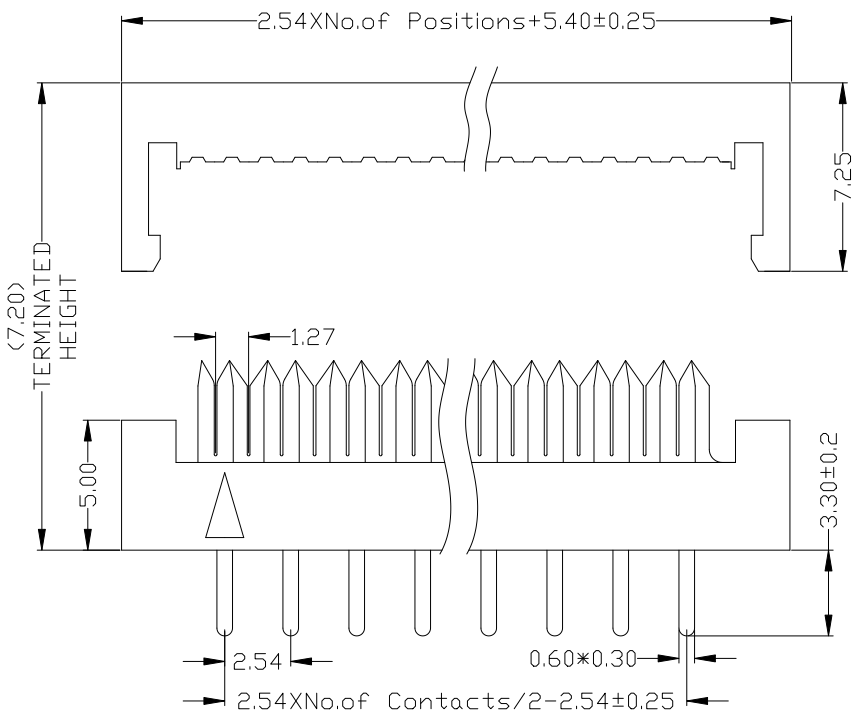

## Ordering Information

DIP1- XX 2 50 XX A YA XX

NO.OF PINS  
6-64P

Contact Plating  
Full Of Gold  
A0=0.8u"

Semi-gold  
B0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR  
MATERIAL:

A:PBT

B:Black

G:Grey427

E:Grey413

W:White

U:Blue

## Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

|     |      |                          |  |        |           |       |       |       |                                                                                       |         |            |                     |  |  |
|-----|------|--------------------------|--|--------|-----------|-------|-------|-------|---------------------------------------------------------------------------------------|---------|------------|---------------------|--|--|
|     |      |                          |  |        | OPERATION |       | SCALE |       | Fit                                                                                   |         | 上海高霖电子有限公司 |                     |  |  |
|     |      |                          |  |        | X.X       | ±0.25 | UNIT  |       | MM                                                                                    |         |            |                     |  |  |
|     |      |                          |  |        | X.XX      | ±0.20 | SIZE  | A4    | DESIGN                                                                                | 卢小强     | PART NO.   | DIP1-XX250XXAYX1    |  |  |
|     |      |                          |  |        | X.XXX     | ±0.10 |       |       |                                                                                       |         |            |                     |  |  |
|     |      |                          |  |        | Angle     | ±3°   | SHEET | 1/1   | CHECK                                                                                 |         | TITLE:     | 2. 54 DIP 塑高5.0 两件式 |  |  |
| REV | DATE | MODIFICATION DESCRIPTION |  | CHANGE | APPROVE   | DIM   | TOL   | PROJ. |  | APPROVE |            | Customer No.        |  |  |