



PR5-80A-030



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 6.4x9.8mm         |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-031



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 5.0x10.1mm        |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-032



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 5.0x10.0mm        |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-113



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 5.0*10.80mm       |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-036



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 6.5x7.8mm         |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-037



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 4.0x9.5mm         |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-033

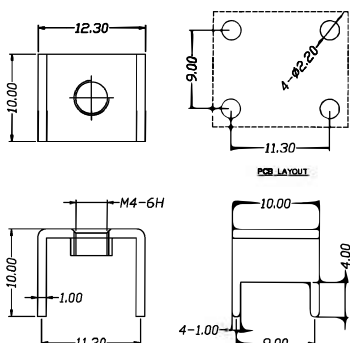

技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 9.0x11.3mm        |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-034



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 5.0x10.8mm        |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-035



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 5.0x10.8mm        |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M4                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 12 lbf · in       |


PR5-80A-038



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 4.1x9.6mm         |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M5                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 20 lbf · in       |


PR5-80A-039



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 7.0x9.3mm         |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M5                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 20 lbf · in       |

PR5-80A-040



技术参数(Technical Data)

|                     |                   |
|---------------------|-------------------|
| 间距(Center Space)    | 7.2x9.6mm         |
| 额定电流(Rated Current) | 80A               |
| 压线螺钉(Screw)         | M5                |
| 焊接端子(Terminal Body) | Brass, Tin Plated |
| 螺钉扭矩(Screw Torque)  | 20 lbf · in       |