


QT 系列 直插式 50A~300A
QT RIVETED GASKET STRAIGHT PIN


QT 系列 直插式 50A~300A
QT RIVETED GASKET STRAIGHT PIN

PR5-80A-099




技术参数(Technical Data)	
间距(Center Space)	8.0x10.8mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-80A-100

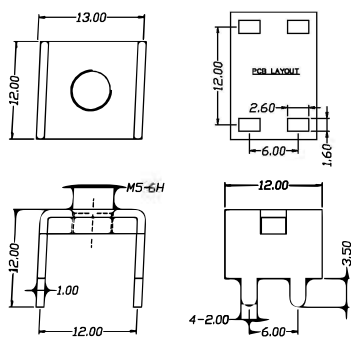


技术参数(Technical Data)	
间距(Center Space)	6.0x12.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-80A-101




技术参数(Technical Data)	
间距(Center Space)	9.0x14.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-023




技术参数(Technical Data)	
间距(Center Space)	6.0x10.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-100A-024



技术参数(Technical Data)	
间距(Center Space)	10.0x10.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-100A-025




技术参数(Technical Data)	
间距(Center Space)	10x10.95mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-80A-125




NEW

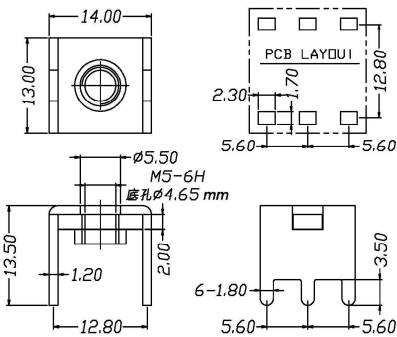


技术参数(Technical Data)	
间距(Center Space)	5.6x12.80mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	40 lbf · in

PR5-80A-090




技术参数(Technical Data)	
间距(Center Space)	6.5x7.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M3.5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	10 lbf · in

PR5-100A-022




技术参数(Technical Data)	
间距(Center Space)	6.0x10.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-100A-026




技术参数(Technical Data)	
间距(Center Space)	10.0x10.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-100A-027



技术参数(Technical Data)	
间距(Center Space)	10.0x10.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-028



技术参数(Technical Data)	
间距(Center Space)	8.7x10.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in