



PR5-100A-041

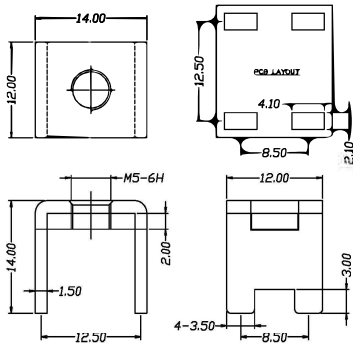


技术参数(Technical Data)	
间距(Center Space)	8.5x12.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100-052




技术参数(Technical Data)	
间距(Center Space)	10.0x16.50mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-036




技术参数(Technical Data)	
间距(Center Space)	5.0x10.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-051




技术参数(Technical Data)	
间距(Center Space)	8.75x13.5mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M8
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	66 lbf · in

PR5-120A-011



技术参数(Technical Data)	
间距(Center Space)	10.0x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-120A-012




技术参数(Technical Data)	
间距(Center Space)	10.0x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-048




NEW

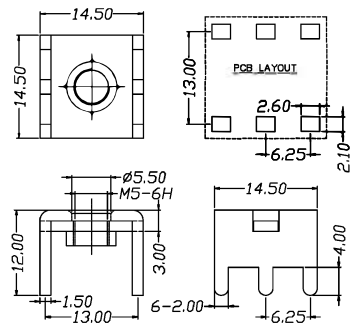

技术参数(Technical Data)	
间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-049




技术参数(Technical Data)	
间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-100A-050




NEW




技术参数(Technical Data)	
间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	100A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

PR5-120A-039




技术参数(Technical Data)	
间距(Center Space)	10.0x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-014



技术参数(Technical Data)	
间距(Center Space)	8.0x10.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-015



技术参数(Technical Data)	
间距(Center Space)	6.0x12.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in