



PR5-120A-016

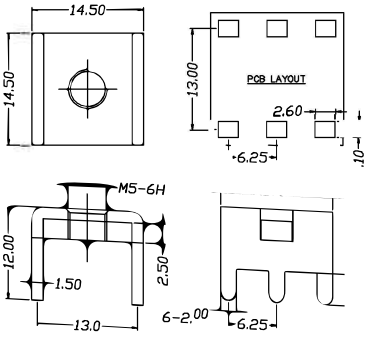


技术参数(Technical Data)	
间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-017

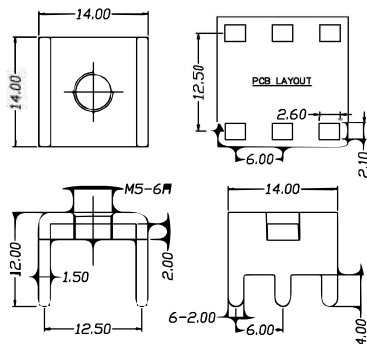


技术参数(Technical Data)	
间距(Center Space)	6.0x12.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-018

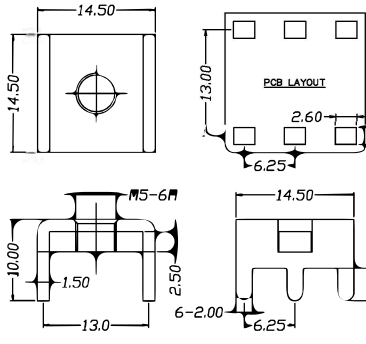


技术参数(Technical Data)	
间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-022

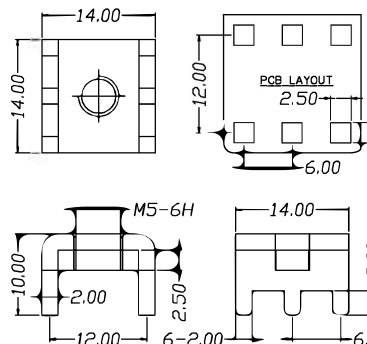


技术参数(Technical Data)	
间距(Center Space)	6.0x12.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-040

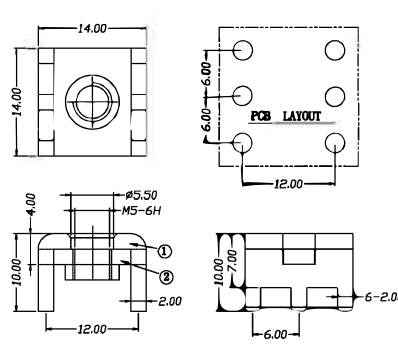


技术参数(Technical Data)	
间距(Center Space)	6.0*12.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-041

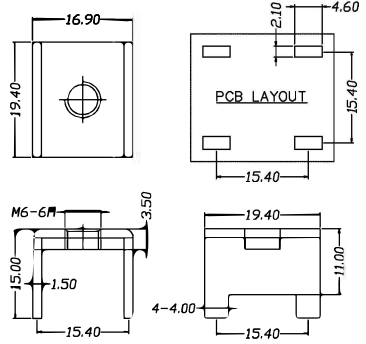


技术参数(Technical Data)	
间距(Center Space)	15.4*15.4mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

PR5-120A-019




技术参数(Technical Data)	
间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-020




技术参数(Technical Data)	
间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-021




技术参数(Technical Data)	
间距(Center Space)	6.2x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-120A-023

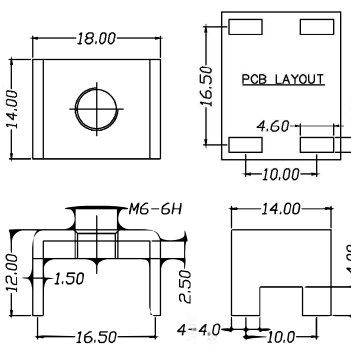


技术参数(Technical Data)	
间距(Center Space)	10.0x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

PR5-120A-024



技术参数(Technical Data)	
间距(Center Space)	10.0x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

PR5-120A-025



技术参数(Technical Data)	
间距(Center Space)	10.0x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in