



PR5-120A-026



技术参数(Technical Data)

间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in


PR5-120A-027



技术参数(Technical Data)

间距(Center Space)	6.25x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in


PR5-120A-028



技术参数(Technical Data)

间距(Center Space)	6.0x12.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in


PR5-120A-031

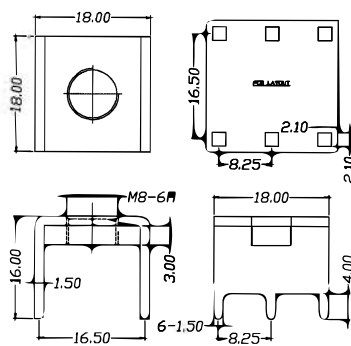

技术参数(Technical Data)

间距(Center Space)	8.25x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M8
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	66 lbf · in


PR5-120A-032



技术参数(Technical Data)

间距(Center Space)	8.25x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M8
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	66 lbf · in

PR5-120A-033




技术参数(Technical Data)

间距(Center Space)	8.25x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M8
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	66 lbf · in

PR5-120A-042




NEW



技术参数(Technical Data)

间距(Center Space)	6.0*12.00mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in


PR5-120A-029



技术参数(Technical Data)

间距(Center Space)	10.5x13.0mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

PR5-120A-030




技术参数(Technical Data)

间距(Center Space)	6.25x16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in

PR5-120A-043




NEW

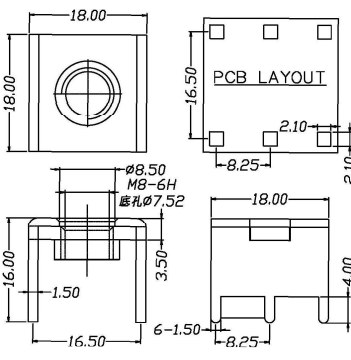

技术参数(Technical Data)

间距(Center Space)	8.25*16.5mm
额定电流(Rated Current)	120A
压线螺钉(Screw)	M8
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	66 lbf · in


PR5-125A-001



技术参数(Technical Data)

间距(Center Space)	5.7*16.5mm
额定电流(Rated Current)	125A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-130A-007



技术参数(Technical Data)

间距(Center Space)	8.5x13.0mm
额定电流(Rated Current)	130A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in