



PR5-80A-106




技术参数(Technical Data)	
间距(Center Space)	6.00*9.30mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-80A-107

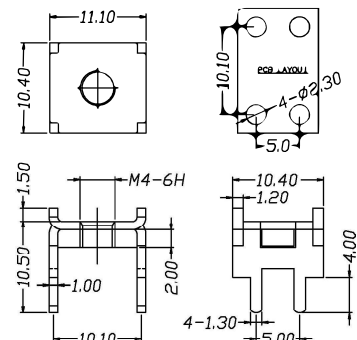


技术参数(Technical Data)	
间距(Center Space)	5.0x10.1mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-80A-108




技术参数(Technical Data)	
间距(Center Space)	5.00*10.00mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-80A-109




技术参数(Technical Data)	
间距(Center Space)	5.0*10.30mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-90A-001




技术参数(Technical Data)	
间距(Center Space)	5.05x8.0mm
额定电流(Rated Current)	90A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in

PR5-90A-002




技术参数(Technical Data)	
间距(Center Space)	5.05x8.0mm
额定电流(Rated Current)	90A
压线螺钉(Screw)	M3
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	6 lbf · in

PR5-80A-009




技术参数(Technical Data)	
间距(Center Space)	5.9x11.0mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-80A-010




技术参数(Technical Data)	
间距(Center Space)	9.0x8.3mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M4
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	14 lbf · in

PR5-80A-011




技术参数(Technical Data)	
间距(Center Space)	9.0x9.3mm
额定电流(Rated Current)	80A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-130A-001




技术参数(Technical Data)	
间距(Center Space)	6.0x12.6mm
额定电流(Rated Current)	130A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-130A-002



技术参数(Technical Data)	
间距(Center Space)	6.0x12.6mm
额定电流(Rated Current)	130A
压线螺钉(Screw)	M5
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	24 lbf · in

PR5-130A-003



技术参数(Technical Data)	
间距(Center Space)	6.5*13.10mm
额定电流(Rated Current)	130A
压线螺钉(Screw)	M6
焊接端子(Terminal Body)	Brass, Tin Plated
螺钉扭矩(Screw Torque)	30 lbf · in